

# OVER VIEW

EN . V12

**NA**

Non-adhesive

**SA**

Self-adhesive

**NEW**

Product news

**+ ▼**

Entire panel length not shown in image

**Continuous pattern**

Pattern progression across panels

**WET ROOM SUITABILITY**



Unsuitable for wet rooms



Low wet room suitability



Limited suitability (remove splash water)



Good wet room suitability



Suitable for use in wet-room areas

**ABRASION RESISTANCE**



Use only in decorative areas



Low abrasion resistance



Normal abrasion resistance



Good abrasion resistance



Very good abrasion resistance



Excellent abrasion resistance



Scratch resistant

**AR**

**AR+**

**STRUCTURE** COLLECTION 13  
**DECO** COLLECTION 63  
**M-STYLE** COLLECTION 77  
**FABRIC** COLLECTION 81  
**LEATHER** COLLECTION 91  
**NATURE** COLLECTION 103  
**S-GLASS** COLLECTION 117  
**NATURAL** COLLECTION 133  
**ACOUSTIC WALL PANELS** 137

**LEGEND** 144

PRODUCT CHARACTERISTICS 145  
PROCESSING 147  
EXTRA EQUIPMENT & ACCESSORIES 149

**PROCESSING** INSTRUCTIONS GENERAL 151

BASIC RULES OF PROCESSING 152  
SUBSTRATE PREPARATION FOR BONDING 154  
BONDING OF SELF-ADHESIVE DESIGN PANELS (SA) 154  
PROCESSING OF NON-ADHESIVE DESIGN PANELS (NA) WITH PUTTY ADHESIVE 155  
BONDING WITH CARTRIDGE ADHESIVE 155  
PRESS DECORATIVE PANELS WITH WHITE GLUE (PVA GLUE) 156  
SELF-ADHESIVE DESIGN PANELS BONDED ONTO COATED WOOD  
BASED SHEETS INCLUDING EDGES AND MILLING 159  
PROCESSING INFORMATION **NATURE COLLECTION** 160  
PROCESSING INFORMATION **ACOUSTIC WALL PANELS** 160

**STORAGE** 161

**TRANSPORT** 161


**CLEANING** 161

**DISPOSAL** 161


**We create ambience.**

With our art of laminating, we unite beauty and function by combining different materials. Always customer-oriented and flexible, we manufacture design elements of outstanding quality and thus ensure unique spatial experiences.


# STRUCTURE COLLECTION



SL LOTUS  
CLASSY Black



SL CROCO  
CLASSY Black



SL RACE  
Vintage Copper/  
Silver




SL LAVA  
VINTAGE Copper




SL LAVA  
VINTAGE Silver



SL LAVA  
VINTAGE Gold



SL CRASHED  
Silver




SL CRASHED  
Hollywood




SL CRASHED  
Hollywood Blue




SL CRASHED  
Aqua




SL CRASHED  
Old Platin



SL CRASHED  
Smoke PF AR




SL CRASHED  
CLASSY Black




SL CREPA  
Silver



SL CREPA  
Gold




SL CREPA  
Hollywood



SL CREPA  
Hollywood Blue



SL CREPA  
Aqua




SL RATTAN 20  
Silver



SL RATTAN 20  
Gold




SL NOTCH  
Smoke PF AR



SL NOTCH  
Silver matt



SL NOTCH  
Gold matt



SL OCEAN  
Anthracite AR



SL OCEAN  
Iceblue AR



SL OCEAN  
Silver



SL OCEAN  
Gold



SL OCEAN  
Hollywood



SL OCEAN  
Hollywood Blue




SL OCEAN  
Aqua




SL OCEAN  
Rainbow

# STRUCTURE COLLECTION



NEW  
SL DIAMOND  
Anthracite AR



NEW  
SL DIAMOND  
Gold



NEW  
SL DIAMOND  
Silver



NEW  
SL DIAMOND  
Copper brushed  
AR



NEW  
SL DIAMOND  
Green Steel  
brushed AR




NEW  
SL FACET Copper  
brushed AR




NEW  
SL FACET Green  
Steel brushed AR



NEW  
SL FACET  
Anthracite AR



NEW  
SL FACET  
Red Brown AR



NEW  
SL FACET Silver



NEW  
SL PILLAR  
Fashion Gold AR




NEW  
SL PILLAR Aqua



NEW  
SL PILLAR  
Hollywood Blue



NEW  
SL PILLAR Silver




NEW  
SL PILLAR Copper  
brushed AR



NEW  
SL WAVE 12  
Silver



NEW  
SL WAVE 12  
Copper brushed AR



NEW  
SL GRAIN  
Anthracite AR



NEW  
SL GRAIN Gold



NEW  
SL GRAIN Silver



NEW  
SL TARGET  
Anthracite AR



NEW  
SL TARGET  
Silver

# DECO COLLECTION



DM Corten



DM LIMESTONE  
Grey



DM CEMENT  
Light



DM MARBLE  
White



DM VINTAGE  
Copper



DM VINTAGE  
Silver



DM METALLIC  
USED Sand



DM LUXURY  
Bronze




DM LUXURY  
Gold



DM CLASSY  
Black AR



DM CLASSY  
Gold



DM OXIDIZED  
Copper



DM Smoke PF  
AR




DM MONSOON  
VINTAGE  
Brown




DM CONCRETE  
Grey AR



WL Carbonized  
Wood



WL Nutwood




WL OAK TREE  
Light


# DECO COLLECTION




DM OPTICAL MIRROR  
Fashion Grey AR



DM OPTICAL MIRROR  
Anthracite AR



DM OPTICAL MIRROR  
Gold AR




DM OPTICAL MIRROR  
Brass AR




DM OPTICAL MIRROR  
Silver AR




DM Brown AR




DM Red Brown AR




DM Rosegold AR



DM Gold AR



DM Brass AR




DM Gold 30 AR



DM Fashion Gold AR



DM Fashion Grey AR




DM Anthracite AR



DM Fashion Red AR



DM Iceblue AR




DM Gold




DM Silver




DM Silver/White




DM Aqua




DM Hollywood Blue




DM Hollywood




DM MAGIC Black AR



DM MAGIC White AR



DM Graphite Black matt



DM Snow White matt



DM Gold MMS



DM Silver MMS



DM Brass brushed matt AR



DM Grey brushed matt AR



DM Copper brushed AR



DM Champagne brushed AR




DM Green Steel brushed AR



DM Silver brushed

## M-STYLE COLLECTION




MS 5x5 flex  
Aqua



MS 5x5 flex  
Hollywood




MS 5x5 flex  
Gold



MS 5x5 flex  
Silver




MS 10x10 flex  
Gold



MS 10x10 flex  
Silver




MS 20x20 flex  
Gold




MS 20x20 flex  
Silver

## FABRIC COLLECTION



FL CUBE VELVET  
Bordeaux




FL CUBE VELVET  
Pearl




FL CREPA  
VELVET  
Volcano



FL CREPA  
VELVET  
Avocado



FL GRAIN  
VELVET Mocha




FL GRAIN  
VELVET  
Volcano




FL LOTUS  
VELVET Mocha




FL COMB  
VELVET Pearl



FL COMB  
VELVET Curry




FL SQUARE 2  
VELVET Mocha



FL LAVA VELVET  
Volcano

# LEATHER COLLECTION




LL ROMBO 40  
Nero matt




LL ROMBO 40  
Creme matt



LL ROMBO 40  
Bianco matt



LL Charcoal  
Dark



LL London Clay



LL Charcoal  
Light



LL Dove Tale



LL Stony  
Ground



LL White



LL LEGUAN  
Nero



LL LEGUAN  
Copper




LL LEGUAN  
Gold



LL LEGUAN  
Silver



LL LEGUAN  
Bianco



LL BRIDGE  
METALLIC  
USED Steel



LL BRIDGE  
METALLIC  
USED Sand



LL BRIDGE  
White



LL GRAIN  
METALLIC  
USED Sand



LL TARGET  
METALLIC  
USED Sand



LL WAVE 12  
METALLIC  
USED Sand




LL LANE  
METALLIC  
USED Titan



LL LANE  
METALLIC  
USED Sand

# NATURE COLLECTION



104  
WL Carbonized  
Wood Nature




105  
WL Nutwood  
Nature



106  
WL Nutwood  
Country Nature



107  
WL Sessile OAK  
Nature



108  
WL Sunwood  
Nature



109  
WL Willow OAK  
Nature



110  
WL OAK TREE  
Light Nature



111  
DM CEMENT  
Dark Nature



112  
DM Corten  
Nature



113  
DM LIMESTONE  
Grey Nature




114  
DM CEMENT  
Light Nature




115  
DM MARBLE  
White Nature

# S-GLASS COLLECTION



118  
SG MARBLE  
Black AR+



119  
SG MARBLE  
Grey AR+



120  
SG MARBLE  
Emperador AR+



121  
SG MARBLE  
Brown AR+



122  
SG MARBLE  
Alpine AR+



123  
SG MARBLE  
White AR+




124  
SG LEGUAN  
Nero AR+



124  
SG LEGUAN  
Copper AR+



124  
SG LEGUAN  
Gold AR+



124  
SG LEGUAN  
Silver AR+



125  
SG VINTAGE  
Copper AR+



125  
SG VINTAGE  
Silver AR+




126  
SG LUXURY  
Bronze AR+




126  
SG LUXURY  
Gold AR+



127  
SG OLD Platin  
AR+



128  
SG METALLIC  
USED Steel AR+



128  
SG METALLIC  
USED Sand AR+



129  
SG CLASSY  
Gold AR+



130  
SG Hollywood


## NATURAL COLLECTION




ALPINE  
PURE AL-11001




ALPINE  
LAVENDER  
BLUE AL-11002



ALPINE  
ROSE AL-11003



ALPINE  
WHITE DAISY  
AL-11004




ALPINE  
POTPOURRI  
AL-11005

## ACOUSTIC WALL PANELS



AP Chalk Light




AP Fuzzy Grey



AP LIMESTONE  
Grey



AP MARBLE  
White



AP Copper  
brushed AR



AP Brass  
brushed matt AR



AP Green Steel  
brushed AR




AP Silver  
brushed




AP Anthracite AR



AP Rosegold AR




AP Fashion  
Gold AR



AP Fashion  
Grey AR

## SUITABLE BALANCING SHEETS

for PVA bonding




suitable  
balancing sheet



# STRUCTURE COLLECTION



More structure for furniture and walls: harmonious colours and unique designs of our STRUCTURE Collection make every surface an eye-catcher and unleash three-dimensional effects. Whether rattan, ocean or concrete look - these design panels provide a special kind of visual and haptic experience.

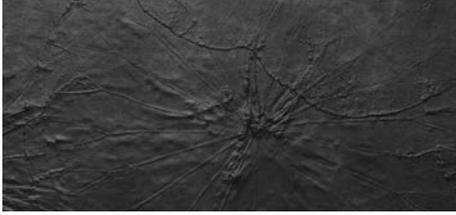

**SL LOTUS CLASSY Black**  
2600 x 1000 | NA 24934 | SA 24963




□ SL LOTUS CLASSY Black

## STRUCTURE COLLECTION

# SL LOTUS CLASSY Black

2600 x 1000

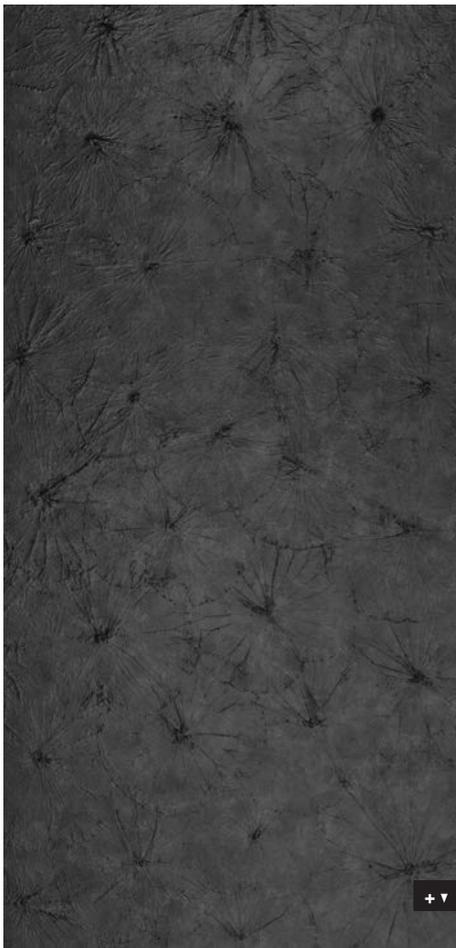

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material*	Druck	
Base material	HIPS	
Material thickness mm	0,8	1,0
Max. relief height mm	3,3	3,5
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□□	
Abrasion resistance	■■■■□□□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,1	~ 2,5

\* The product is delivered without a protective film.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	—	

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	—	

\* own printing test required, samples are gladly provided.

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	



**SL CROCO CLASSY Black**  
2600 x 1000 | NA 24935 | SA 24964



□ SL CROCO CLASSY Black

2600 x 1000



## STRUCTURE COLLECTION

# SL CROCO

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material*	Druck	
Base material	HIPS	
Material thickness mm	0,8	1,1
Max. relief height mm	2,4	2,7
Temperature resistance	until 50 °C	
Wet room suitability	■■■□□	
Abrasion resistance	■■■□□□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,1	~ 2,7

\* The product is delivered without a protective film.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	—	

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	—	

\* own printing test required, samples are gladly provided.

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	




**SL RACE VINTAGE Copper/Silver**  
2600 x 1000 | NA 17240 | SA 17241



□ SL RACE  
VINTAGE Copper/Silver

Photo Wilhelm Radinger

2600 x 1000

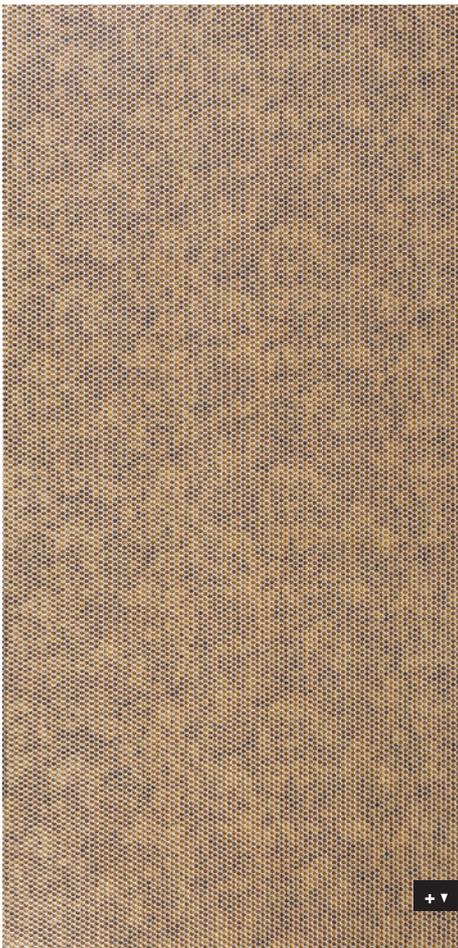

## STRUCTURE COLLECTION

# SL RACE

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material*	Print	
Base material	HIPS	
Material thickness mm	0,8	1,0
Max. relief height mm	1,5	1,7
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□□	
Abrasion resistance	■■□□□□□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,2	~ 2,6

\* The product is delivered without a protective film.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	—	

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	—	
Screen printing	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	



**SL LAVA VINTAGE Copper**  
2600 x 1000 | NA 28893 | SA 28894



**SL LAVA VINTAGE Silver**  
2600 x 1000 | NA 24968 | SA 24972



**SL LAVA VINTAGE Gold**  
2600 x 1000 | NA 24969 | SA 24973



SL LAVA VINTAGE  
Copper



2600 x 1000



## STRUCTURE COLLECTION

# SL LAVA

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material*	Print	
Base material	HIPS	
Material thickness mm	0,8	1,1
Max. relief height mm	1,9	2,2
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□□	
Abrasion resistance	■■■■□□□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,2	~ 2,8

\* The product is delivered without a protective film.


### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	—	

### PROCESSING


	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	—	
Screen printing	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	

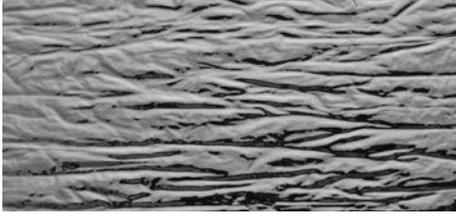

**SL CRASHED Silver**

2600 x 1000 | **NA** 19335 | **SA** 19346

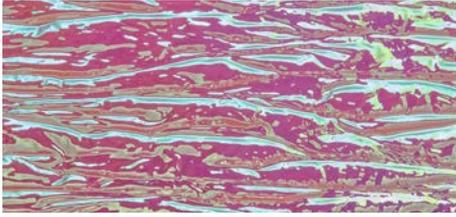

**SL CRASHED Hollywood**

2600 x 1000 | **NA** 25162 | **SA** 29018



**SL CRASHED Hollywood Blue**

2600 x 1000 | **NA** 28815 | **SA** 29019




**SL CRASHED Aqua**

2600 x 1000 | **NA** 24099 | **SA** 29084



2600 x 1000

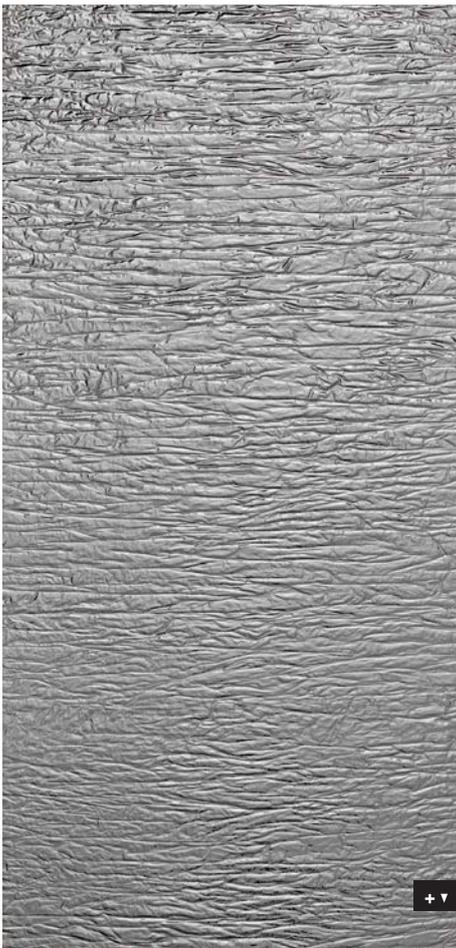

**STRUCTURE COLLECTION**

**SL CRASHED**

**PRODUCT CHARACTERISTICS**

	<b>NA</b>	<b>SA</b>
<b>Surface material</b>	PET	
<b>Base material</b>	HIPS	
<b>Material thickness mm</b>	0,8	1,1
<b>Max. relief height mm</b>	2,2	2,5
<b>Temperature resistance</b>	until 50 °C	
<b>Wet room suitability</b>	■■■■□	
<b>Abrasion resistance</b>	■■□□□□	
<b>Abrasion resistance Silver</b>	■■■■□□□	
<b>Rolled packable</b> Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
<b>Smallest bending radius mm</b>	150	
<b>Weight/panel kg</b>	~ 2,8	~ 2,8

**PROCESSING**

	<b>NA</b>	<b>SA</b>
<b>Cutting, punching</b>	✓	✓
<b>Drilling</b>	✓	✓
<b>Sawing</b>	✓	—
<b>Milling</b>	✓	—
<b>Laser cutting</b>	✓	✓
<b>Hot bending</b>	✓	—
<b>PVA pressing</b>	✓	—
<b>Digital printing</b>	✓*	
<b>Digital printing Silver</b>	On request	
<b>Screen printing</b>	—	

\* own printing test required, samples are gladly provided.

**EXTRA EQUIPMENT | ACCESSORIES**

	<b>NA</b>	<b>SA</b>
<b>PVA pre-treatment</b>	✓	—
<b>Special sizes</b>	—	
<b>Further thicknesses</b>	—	

	<b>NA</b>	<b>SA</b>
<b>Magnetic</b> from 3 sheets	✓	
<b>Cuttings</b>	✓	
<b>Flammability</b> ASTM E84	✓ Silver + Hollywood + Hollywood Blue	
<b>Flammability</b> EN13501-1	✓ Silver + Hollywood + Hollywood Blue	





**SL CRASHED OLD Platin**  
2600 x 1000 | NA 19519 | SA 19523



□ SL CRASHED OLD Platin

Photo: Dekomat AG - Creative Expert

## STRUCTURE COLLECTION

# SL CRASHED OLD Platin

2600 x 1000



### PRODUCT CHARACTERISTICS

	NA	SA
Surface material*	Print	
Base material	HIPS	
Material thickness mm	0,8	1,1
Max. relief height mm	2,2	2,5
Temperature resistance	until 50 °C	
Wet room suitability	■ ■ ■ □ □	
Abrasion resistance	■ ■ ■ □ □ □ □	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,1	~ 2,8

\* The product is delivered without a protective film.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	—	

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	—	

\* own printing test required, samples are gladly provided.

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	



**SL CRASHED Smoke PF AR**  
2600 x 1000 | NA 24908 | SA 24940



☐ SL CRASHED Smoke PF AR

Photo: HKW, Alexander Knoebel

## STRUCTURE COLLECTION

abrasion-resistant

2600 x 1000



# SL CRASHED Smoke PF AR

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material*	Print	
Base material	HIPS	
Material thickness mm	0,8	1,1
Max. relief height mm	2,2	2,5
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■■□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,1	~ 2,8

\* The product is delivered without a protective film.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	—	

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	—	

\* own printing test required, samples are gladly provided.

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	



**SL CRASHED CLASSY Black**  
2600 x 1000 | NA 24909 | SA 24941



□ SL CRASHED CLASSY Black

## STRUCTURE COLLECTION

# SL CRASHED CLASSY Black

2600 x 1000



### PRODUCT CHARACTERISTICS

	NA	SA
Surface material*	Print	
Base material	HIPS	
Material thickness mm	0,8	1,1
Max. relief height mm	2,2	2,5
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□□	
Abrasion resistance	■■■■□□□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,2	~ 2,8

\* The product is delivered without a protective film.

### EXTRA EQUIPMENT | ACCESSORIES


	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	—	

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	—	


\* own printing test required, samples are gladly provided.

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	

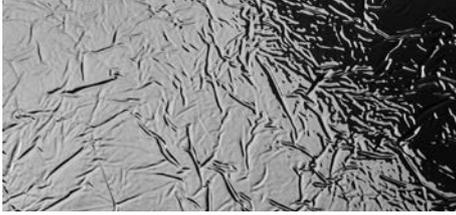


**SL CREPA Silver**

2600 x 1000 | NA 24913 | SA 24945

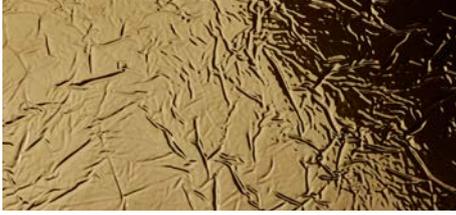


**SL CREPA Gold**

2600 x 1000 | NA 24912 | SA 24944

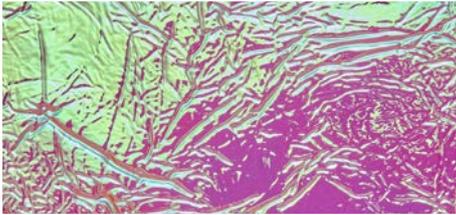

**SL CREPA Hollywood**

2600 x 1000 | NA 28788 | SA 29020

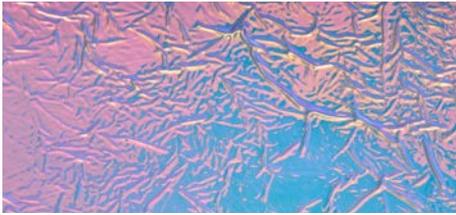

**SL CREPA Hollywood Blue**


2600 x 1000 | NA 28789 | SA 29021



**SL CREPA Aqua**

2600 x 1000 | NA 29086 | SA 29085

2600 x 1000

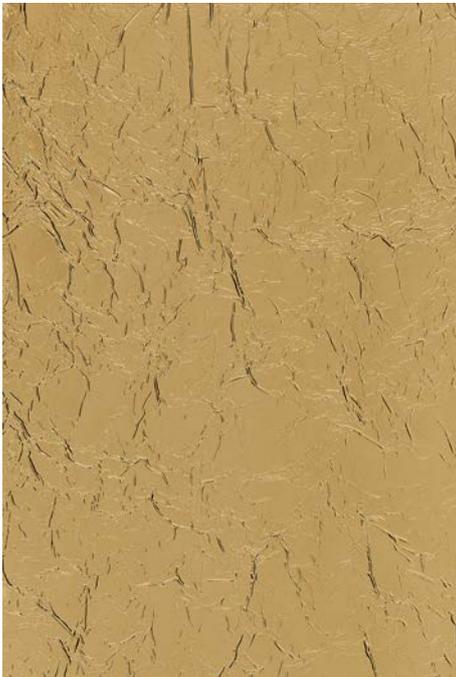

□ SL CREPA Silver

**STRUCTURE COLLECTION**

**SL CREPA**

**PRODUCT CHARACTERISTICS**

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	0,8	1,1
Max. relief height mm	1,7	2,0
Temperature resistance	until 50 °C	
Wet room suitability	■■■□□	
Abrasion resistance	■■□□□□	
Abrasion resistance Silver	■■■□□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,2	~ 2,8

**PROCESSING**


	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	✓*	
Digital printing Gold/Silver	On request	
Screen printing	—	

\* own printing test required, samples are gladly provided.

**EXTRA EQUIPMENT | ACCESSORIES**


	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓ Silver + Gold + Hollywood + Hollywood Blue	
Flammability EN13501-1	✓ Silver + Gold + Hollywood + Hollywood Blue	

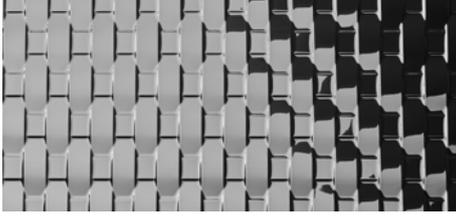

**SL RATTAN 20 Silver**

2600 x 1000 | NA 24922 | SA 24956

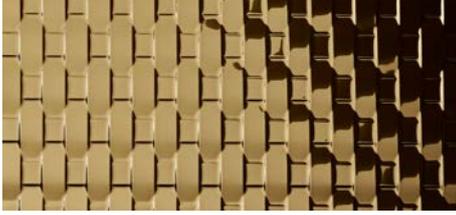

**SL RATTAN 20 Gold**

2600 x 1000 | NA 24921 | SA 24955




□ SL RATTAN 20 Silver

STRUCTURE COLLECTION

**SL RATTAN 20**

2600 x 1000

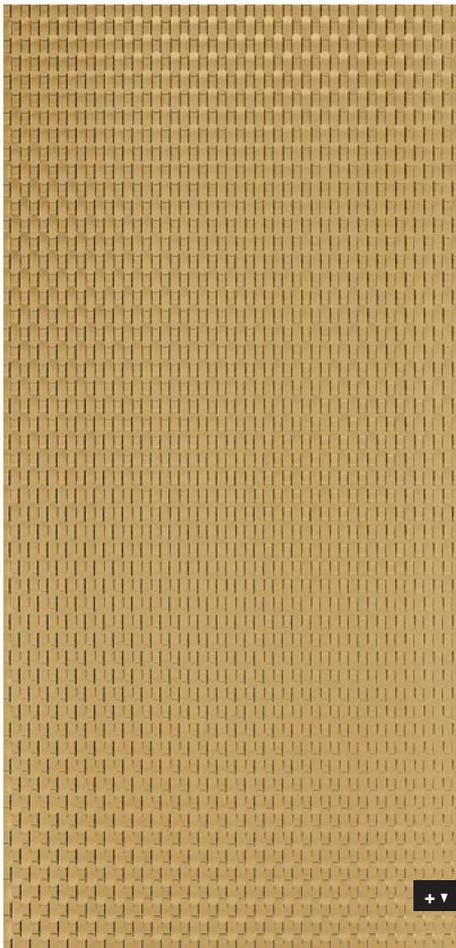

PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	0,8	1,1
Max. relief height mm	2,4	2,7
Temperature resistance	until 50 °C	
Wet room suitability	■ ■ ■ □ □	
Abrasion resistance	■ ■ □ □ □ □	
Abrasion resistance Silver	■ ■ ■ □ □ □ □	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,2	~ 2,8

PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	On request	
Screen printing	—	


\* own printing test required, samples are gladly provided.

EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	

**SL NOTCH Smoke PF AR**  
2600 x 1000 | NA 24931 | SA 24960

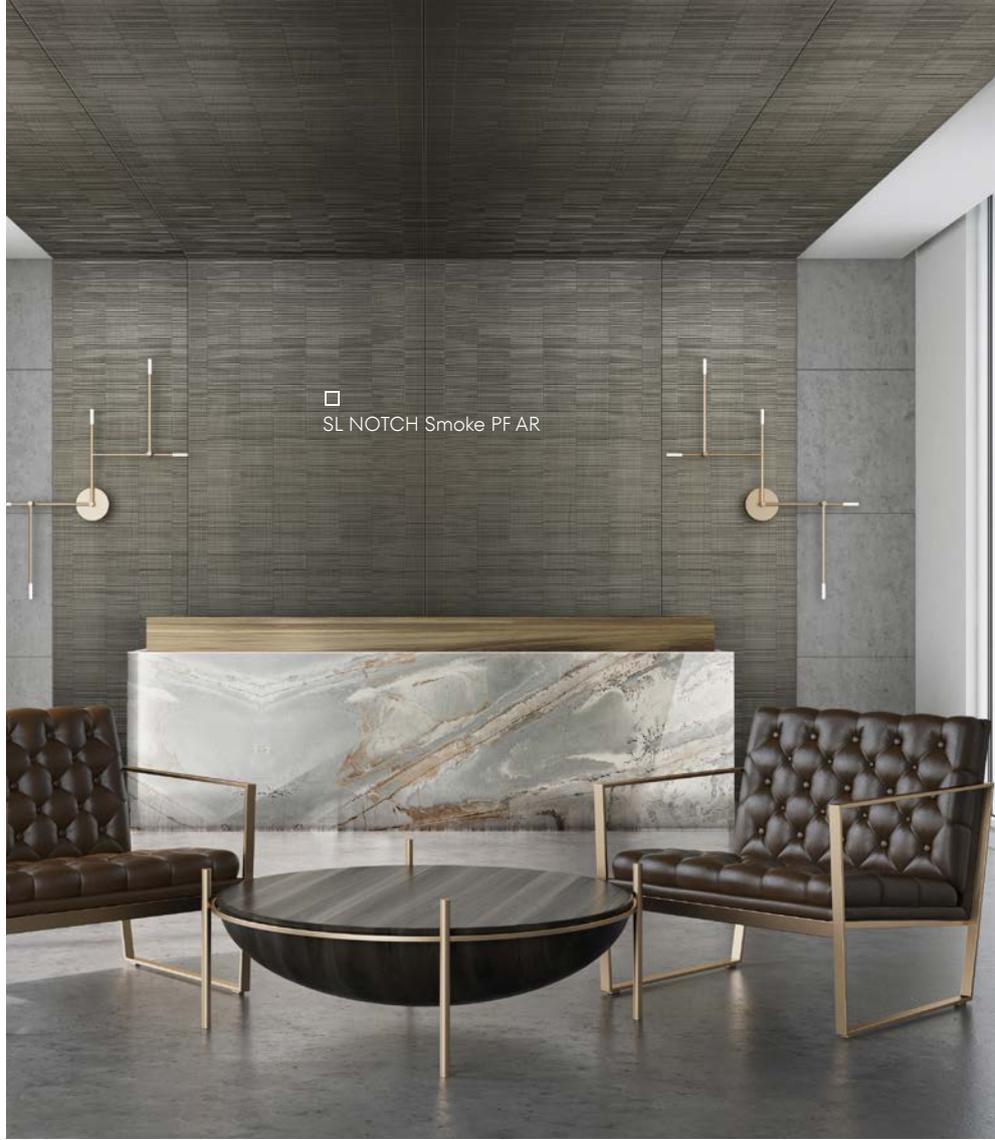

## STRUCTURE COLLECTION

abrasion-resistant

# SL NOTCH Smoke PF AR

2600 x 1000



### PRODUCT CHARACTERISTICS

	NA	SA
Surface material*	Print	
Base material	HIPS	
Material thickness mm	0,8	1,0
Max. relief height mm	1,2	1,4
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■■□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,2	~ 2,6

\* The product is delivered without a protective film.

### EXTRA EQUIPMENT | ACCESSORIES


	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	—	

### PROCESSING


	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing Silver	✓*	
Screen printing	—	

\* own printing test required, samples are gladly provided.

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	

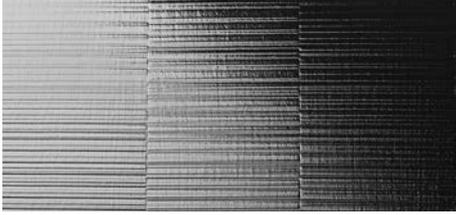

**SL NOTCH Silver matt**  
2600 x 1000 | NA 24947 | SA 24961

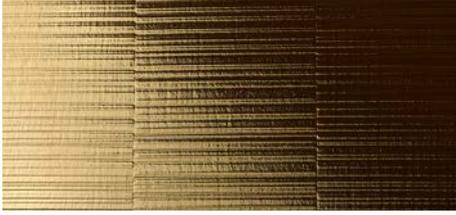

**SL NOTCH Gold matt**  
2600 x 1000 | NA 24948 | SA 24962



Photo: HKW, Alexander Knoebel

## STRUCTURE COLLECTION

# SL NOTCH matt

2600 x 1000



### PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	0,8	1,0
Max. relief height mm	1,2	1,4
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□□	
Abrasion resistance	■■■■□□□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,2	~ 2,6

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	On request	
Screen printing	—	

\* own printing test required, samples are gladly provided.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	



**SL OCEAN Anthracite AR**  
2600 x 1000 | NA 25670 | SA 27049



**SL OCEAN Iceblue AR**  
2600 x 1000 | NA 27061 | SA 27047

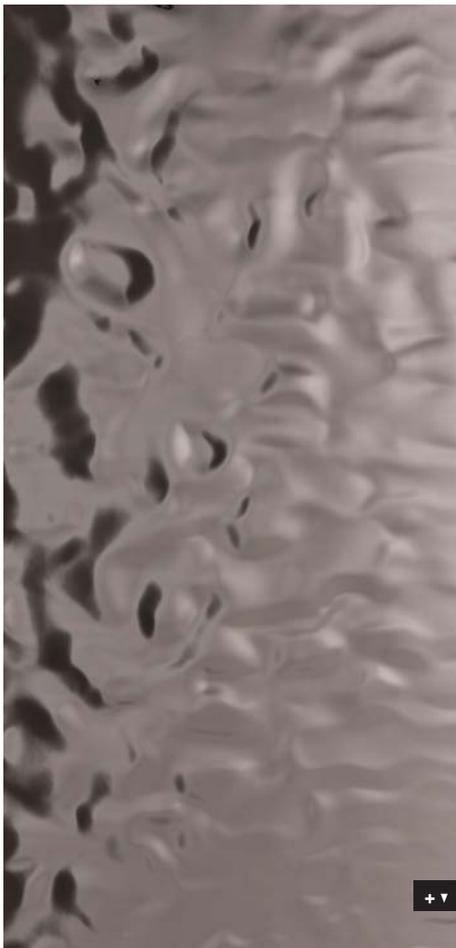


Photo: Ferienwelt Kesselgrub

□ SL OCEAN Anthracite AR

Due to the pattern, mechanical assembly (screws, spacers) is generally recommended. Applications in the ceiling area must be attached mechanically.

2600 x 1000



## STRUCTURE COLLECTION

# SL OCEAN AR

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	2,0	2,3
Max. relief height mm	6,0	6,3
Temperature resistance	until 50 °C	
Wet room suitability	■ ■ ■ □ □	
Abrasion resistance	■ ■ ■ ■ ■ □	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 2 pcs/carton	—
Smallest bending radius mm	1000	
Weight/panel kg	~ 5,6	~ 6,2

### PROCESSING

	NA	SA
Cutting	✓	
Punching	—	
Drilling	✓	
Sawing, milling	✓	—
Laser cutting	✓	
Hot bending	On request	—
PVA pressing	Conditionally possible	
Digital printing	✓*	
Screen printing	—	

\* own printing test required, samples are gladly provided.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
Glue recommendation	Cartridge adhesive and putty adhesive	—
PVA pre-treatment	—	
Further thicknesses	—	
Magnetic from 3 sheets	—	

	NA	SA
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	

\* In general, WALLFACE® also recommends mechanical attachment.



**SL OCEAN Silver**

2600 x 1000 | NA 25570 | SA 27027



**SL OCEAN Gold**

2600 x 1000 | NA 27111 | SA 27823




**SL OCEAN Hollywood**

2600 x 1000 | NA 25671 | SA 27048




**SL OCEAN Hollywood Blue**

2600 x 1000 | NA 27180 | SA 27822

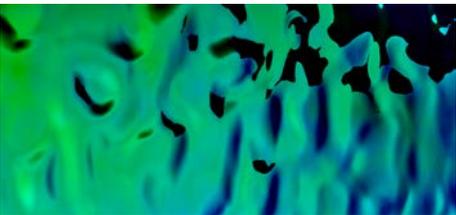

**SL OCEAN Aqua**

2600 x 1000 | NA 25669 | SA 27207

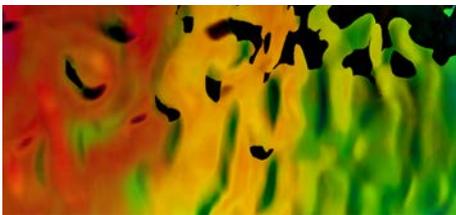

**SL OCEAN Rainbow**

2600 x 1000 | NA 27679 | SA 27743



raulpalmaphoto

Due to the pattern, mechanical assembly (screws, spacers) is generally recommended. Applications in the ceiling area must be attached mechanically.

## STRUCTURE COLLECTION

# SL OCEAN

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	2,0	2,3
Max. relief height mm	6,0	6,3
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■□□□□	
Abrasion resistance Silver	■■■■□□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 2 pcs/carton	—
Smallest bending radius mm	1000	
Weight/panel kg	~ 5,6	~ 6,2

### PROCESSING

	NA	SA
Cutting	✓	
Punching	—	
Drilling	✓	
Sawing, milling	✓	—
Laser cutting	✓	
Hot bending	On request	—
PVA pressing	Conditionally possible	
Digital printing	✓*	
Digital printing Silver/Gold	On request	
Screen printing	—	

\* own printing test required, samples are gladly provided.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
Glue recommendation	Cartridge adhesive and putty adhesive	—
PVA pre-treatment	—	
Further thicknesses	—	
Magnetic from 3 sheets	—	

	NA	SA
Cuttings	✓	
Flammability ASTM E84	✓ Silver + Gold + Hollywood + Hollywood Blue	
Flammability EN13501-1	✓ Silver + Gold + Hollywood + Hollywood Blue	

\* In general, WALLFACE® also recommends mechanical attachment.

**SL DIAMOND Anthracite AR**

2600 x 1000 | NA 30945 | SA 30946



□  
SL DIAMOND Anthracite AR

Due to the pattern, mechanical assembly (screws, spacers) is generally recommended. Applications in the ceiling area must be attached mechanically.

## STRUCTURE COLLECTION

**SL DIAMOND AR**

2600 x 1000



## PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	2,0	2,3
Max. relief height mm	3,5	3,8
Temperature resistance	until 50 °C	
Wet room suitability	■ ■ ■ □ □	
Abrasion resistance	■ ■ ■ ■ ■ □	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 2 pcs/carton	—
Smallest bending radius mm	1000	
Weight/panel kg	~ 5,6	~ 6,2

## PROCESSING

	NA	SA
Cutting	✓	
Punching	—	
Drilling	✓	
Sawing, milling	✓	—
Laser cutting	✓	
Hot bending	On request	—
PVA pressing	Conditionally possible	
Digital printing	✓*	
Screen printing	—	

\* own printing test required, samples are gladly provided.

## EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
Glue recommendation	Cartridge adhesive and putty adhesive	—
PVA pre-treatment	—	
Further thicknesses	—	
Magnetic from 3 sheets	—	

	NA	SA
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	

\* In general, WALLFACE® also recommends mechanical attachment.

CONTINUOUS PATTERN



NEW

**SL DIAMOND Gold**

2600 x 1000 | NA 31019 | SA 31022


CONTINUOUS PATTERN



NEW

**SL DIAMOND Silver**

2600 x 1000 | NA 30942 | SA 30949

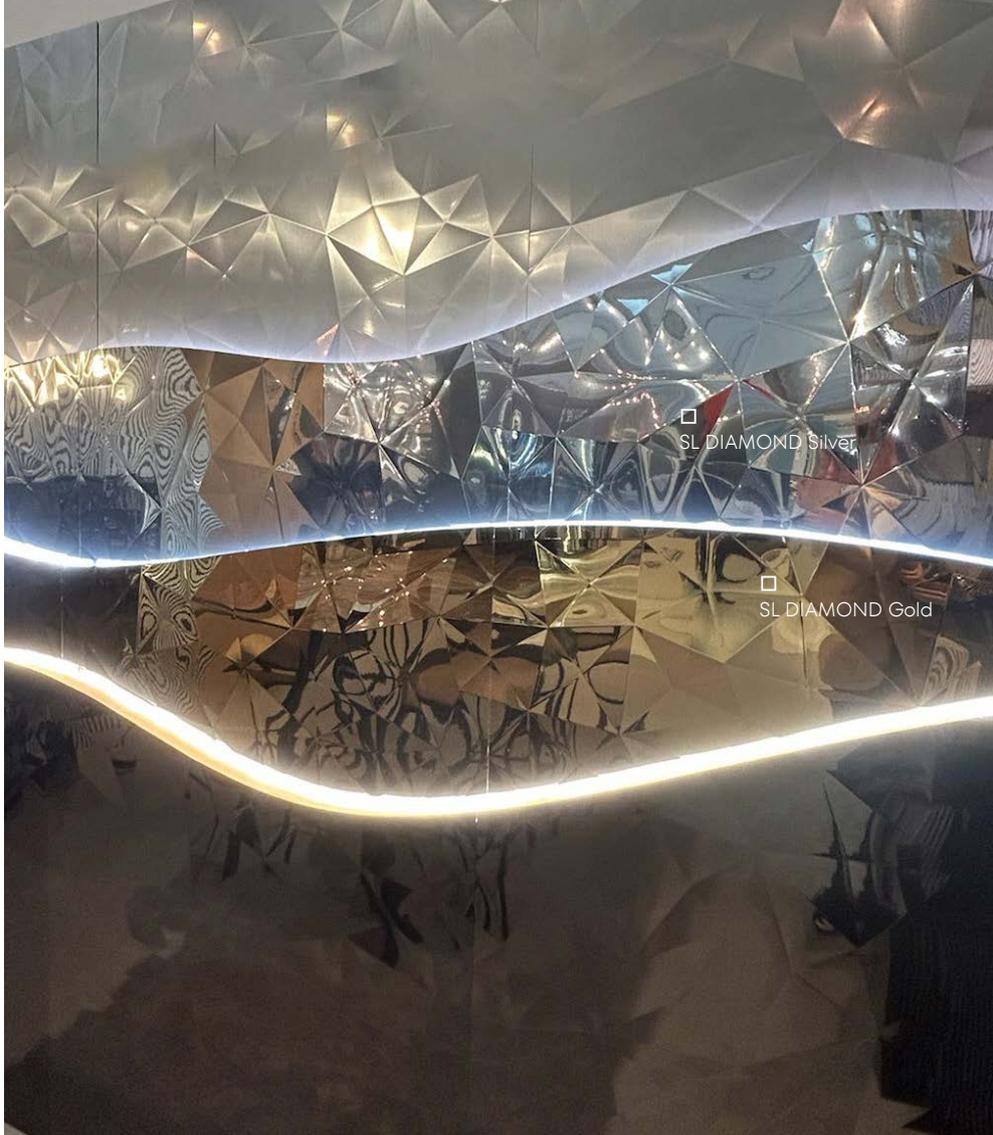

2600 x 1000



Due to the pattern, mechanical assembly (screws, spacers) is generally recommended. Applications in the ceiling area must be attached mechanically.

STRUCTURE COLLECTION

**SL DIAMOND**

PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	2,0	2,3
Max. relief height mm	3,5	3,8
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■□□□□	
Abrasion resistance Silver	■■■■□□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 2 pcs/carton	—
Smallest bending radius mm	1000	
Weight/panel kg	~ 5,6	~ 6,2

PROCESSING

	NA	SA
Cutting	✓	
Punching	—	
Drilling	✓	
Sawing, milling	✓	—
Laser cutting	✓	
Hot bending	On request	—
PVA pressing	Conditionally possible	
Digital printing	On request	
Screen printing	—	

EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
Glue recommendation	Cartridge adhesive and putty adhesive	—
PVA pre-treatment	—	
Further thicknesses	—	
Magnetic from 3 sheets	—	

	NA	SA
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	

\* In general, WALLFACE® also recommends mechanical attachment.

NEW

**SL DIAMOND Copper brushed AR**

2600 x 1000 | NA 30944 | SA 30947

NEW

**SL DIAMOND Green Steel brushed AR**

2600 x 1000 | NA 31018 | SA 31020



□ SL DIAMOND Copper brushed AR

Due to the pattern, mechanical assembly (screws, spacers) is generally recommended. Applications in the ceiling area must be attached mechanically.

**STRUCTURE COLLECTION****SL DIAMOND BRUSHED AR**

2600 x 1000

**PRODUCT CHARACTERISTICS**

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	2,0	2,3
Max. relief height mm	3,5	3,8
Temperature resistance	until 50 °C	
Wet room suitability	■ ■ ■ □ □	
Abrasion resistance	■ ■ ■ ■ ■ □	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 2 pcs/carton	—
Smallest bending radius mm	1000	
Weight/panel kg	~ 5,6	~ 6,2

**PROCESSING**

	NA	SA
Cutting	✓	
Punching	—	
Drilling	✓	
Sawing, milling	✓	—
Laser cutting	✓	
Hot bending	On request	—
PVA pressing	Conditionally possible	
Digital printing	On request	
Screen printing	—	

**EXTRA EQUIPMENT | ACCESSORIES**

	NA	SA
Glue recommendation	Cartridge adhesive and putty adhesive	—
PVA pre-treatment	—	
Further thicknesses	—	
Magnetic from 3 sheets	—	

	NA	SA
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	

\* In general, WALLFACE® also recommends mechanical attachment.




NEW

**SL FACET Copper brushed AR**  
2600 x 1000 | NA 30963 | SA 30967



NEW

**SL FACET Green Steel brushed AR**  
2600 x 1000 | NA 31017 | SA 31021

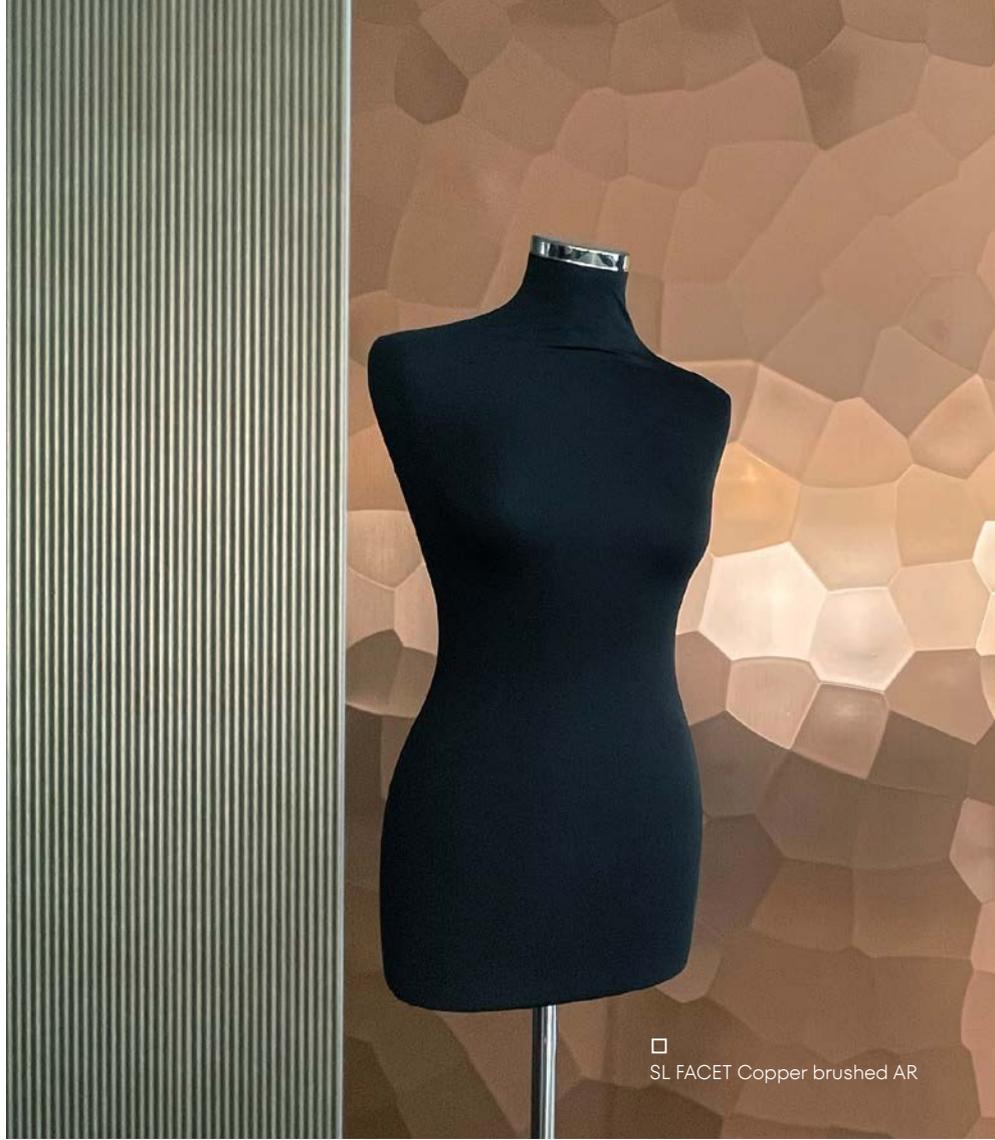

□ SL FACET Copper brushed AR

Due to the pattern, mechanical assembly (screws, spacers) is generally recommended. Applications in the ceiling area must be attached mechanically.

2600 x 1000



## STRUCTURE COLLECTION

# SL FACET BRUSHED AR

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	2,0	2,3
Max. relief height mm	3,5	3,8
Temperature resistance	until 50 °C	
Wet room suitability	■ ■ ■ □ □	
Abrasion resistance	■ ■ ■ ■ ■ □	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 2 pcs/carton	—
Smallest bending radius mm	1000	
Weight/panel kg	~ 5,6	~ 6,2

### PROCESSING

	NA	SA
Cutting	✓	
Punching	—	
Drilling	✓	
Sawing, milling	✓	—
Laser cutting	✓	
Hot bending	On request	—
PVA pressing	Conditionally possible	
Digital printing	On request	
Screen printing	—	

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
Glue recommendation	Cartridge adhesive and putty adhesive	—
PVA pre-treatment	—	
Further thicknesses	—	
Magnetic from 3 sheets	—	

	NA	SA
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	

\* In general, WALLFACE® also recommends mechanical attachment.



NEW

**SL FACET Anthracite AR**

2600 x 1000 | NA 30964 | SA 30968



NEW

**SL FACET Red Brown AR**

2600 x 1000 | NA 31015 | SA 31016



□ SL FACET Anthracite AR

Due to the pattern, mechanical assembly (screws, spacers) is generally recommended. Applications in the ceiling area must be attached mechanically.

2600 x 1000



STRUCTURE COLLECTION

**SL FACET AR**

PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	2,0	2,3
Max. relief height mm	3,5	3,8
Temperature resistance	until 50 °C	
Wet room suitability	■ ■ ■ □ □	
Abrasion resistance	■ ■ ■ ■ ■ □	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 2 pcs/carton	—
Smallest bending radius mm	1000	
Weight/panel kg	~ 5,6	~ 6,2

PROCESSING

	NA	SA
Cutting	✓	
Punching	—	
Drilling	✓	
Sawing, milling	✓	—
Laser cutting	✓	
Hot bending	On request	—
PVA pressing	Conditionally possible	
Digital printing	✓*	
Screen printing	—	

\* own printing test required, samples are gladly provided.

EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
Glue recommendation	Cartridge adhesive and putty adhesive	—
PVA pre-treatment	—	
Further thicknesses	—	
Magnetic from 3 sheets	—	

	NA	SA
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	

\* In general, WALLFACE® also recommends mechanical attachment.





NEW

**SL FACET Silver**

2600 x 1000 | NA 30961 | SA 30965



□ SL FACET Silver

2600 x 1000



STRUCTURE COLLECTION

**SL FACET**

Due to the pattern, mechanical assembly (screws, spacers) is generally recommended. Applications in the ceiling area must be attached mechanically.

PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	2,0	2,3
Max. relief height mm	3,5	3,8
Temperature resistance	until 50 °C	
Wet room suitability	■ ■ ■ □ □	
Abrasion resistance	■ ■ □ □ □ □ □	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 2 pcs/carton	—
Smallest bending radius mm	1000	
Weight/panel kg	~ 5,6	~ 6,2

PROCESSING

	NA	SA
Cutting	✓	
Punching	—	
Drilling	✓	
Sawing, milling	✓	—
Laser cutting	✓	
Hot bending	On request	—
PVA pressing	Conditionally possible	
Digital printing	On request	
Screen printing	—	

EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
Glue recommendation	Cartridge adhesive and putty adhesive	—
PVA pre-treatment	—	
Further thicknesses	—	
Magnetic from 3 sheets	—	

	NA	SA
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	

\* In general, WALLFACE® also recommends mechanical attachment.

NEW

**SL PILLAR Fashion Gold AR**  
2600 x 1000 | NA 30951 | SA 30955



□  
SL PILLAR Fashion Gold AR

Due to the pattern, mechanical assembly (screws, spacers) is generally recommended. Applications in the ceiling area must be attached mechanically.

2600 x 1000

## STRUCTURE COLLECTION

## SL PILLAR AR

## PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	2,0	2,3
Max. relief height mm	3,5	3,8
Temperature resistance	until 50 °C	
Wet room suitability	■ ■ ■ □ □	
Abrasion resistance	■ ■ ■ ■ ■ □	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 2 pcs/carton	—
Smallest bending radius mm	1000	
Weight/panel kg	~ 5,6	~ 6,2

## PROCESSING

	NA	SA
Cutting	✓	
Punching	—	
Drilling	✓	
Sawing, milling	✓	—
Laser cutting	✓	
Hot bending	On request	—
PVA pressing	Conditionally possible	
Digital printing	✓*	
Screen printing	—	


\* own printing test required, samples are gladly provided.

## EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
Glue recommendation	Cartridge adhesive and putty adhesive	—
PVA pre-treatment	—	
Further thicknesses	—	
Magnetic from 3 sheets	—	

	NA	SA
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	

\* In general, WALLFACE® also recommends mechanical attachment.

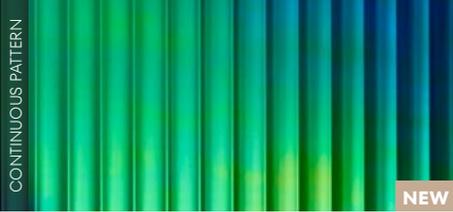


**SL PILLAR Aqua**  
2600 x 1000 | NA 31023 | SA 31026



**SL PILLAR Hollywood Blue**  
2600 x 1000 | NA 31024 | SA 31025




**SL PILLAR Silver**  
2600 x 1000 | NA 30950 | SA 30954

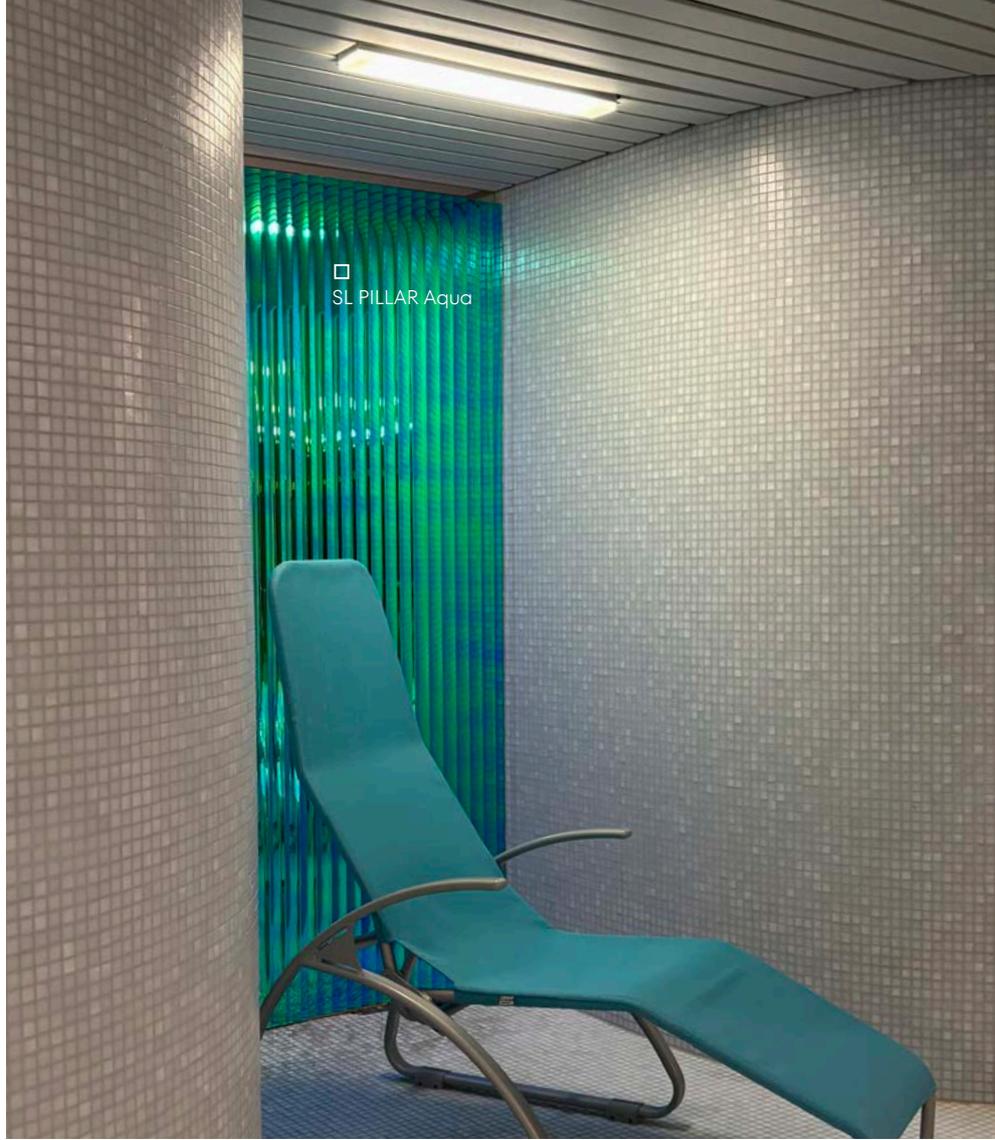

Due to the pattern, mechanical assembly (screws, spacers) is generally recommended. Applications in the ceiling area must be attached mechanically.

2600 x 1000

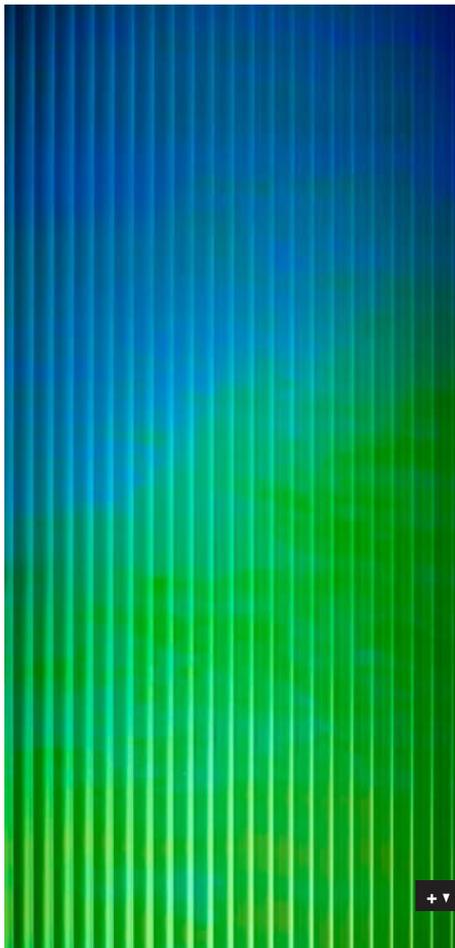

## STRUCTURE COLLECTION

# SL PILLAR

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	2,0	2,3
Max. relief height mm	3,5	3,8
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■□□□□	
Abrasion resistance Silver	■■■□□□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 2 pcs/carton	—
Smallest bending radius mm	1000	
Weight/panel kg	~ 5,6	~ 6,2

### PROCESSING

	NA	SA
Cutting	✓	
Punching	—	
Drilling	✓	
Sawing, milling	✓	—
Laser cutting	✓	
Hot bending	On request	—
PVA pressing	Conditionally possible	
Digital printing	On request	
Screen printing	—	

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
Glue recommendation	Cartridge adhesive and putty adhesive	—
PVA pre-treatment	—	
Further thicknesses	—	
Magnetic from 3 sheets	—	

	NA	SA
Cuttings	✓	
Flammability ASTM E84	✓ Silver + Hollywood Blue	
Flammability EN13501-1	✓ Silver + Hollywood Blue	

\* In general, WALLFACE® also recommends mechanical attachment.

**SL PILLAR Copper brushed AR**

2600 x 1000 | NA 30952 | SA 30956


 SL PILLAR Copper brushed AR

Due to the pattern, mechanical assembly (screws, spacers) is generally recommended. Applications in the ceiling area must be attached mechanically.

## STRUCTURE COLLECTION

**SL PILLAR BRUSHED AR**

2600 x 1000



## PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	2,0	2,3
Max. relief height mm	3,5	3,8
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■■■■□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 2 pcs/carton	—
Smallest bending radius mm	1000	
Weight/panel kg	~ 5,6	~ 6,2

## PROCESSING

	NA	SA
Cutting	✓	
Punching	—	
Drilling	✓	
Sawing, milling	✓	—
Laser cutting	✓	
Hot bending	On request	—
PVA pressing	Conditionally possible	
Digital printing	On request	
Screen printing	—	

## EXTRA EQUIPMENT | ACCESSORIES


	NA	SA
Glue recommendation	Cartridge adhesive and putty adhesive	—
PVA pre-treatment	—	
Further thicknesses	—	
Magnetic from 3 sheets	—	

	NA	SA
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	

\* In general, WALLFACE® also recommends mechanical attachment.



□ SL PILLAR Copper brushed AR

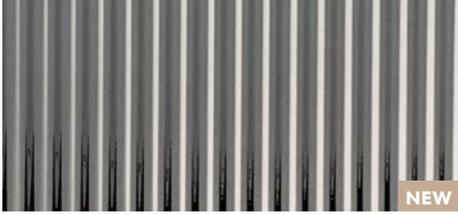

NEW

**SL WAVE 12 Silver**


2600 x 1000 | NA 28316 | SA 29202



□ SL WAVE 12 Silver

Due to the pattern, mechanical assembly (screws, spacers) is generally recommended. Applications in the ceiling area must be attached mechanically.

2600 x 1000

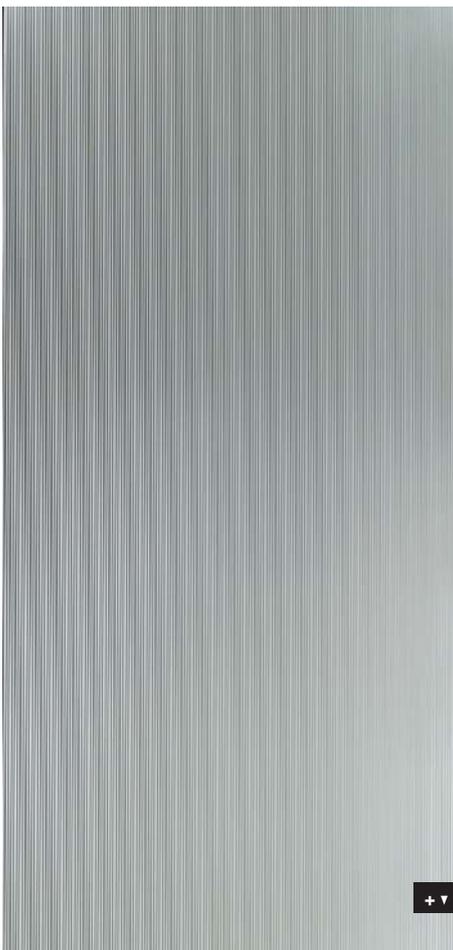

STRUCTURE COLLECTION

**SL WAVE 12**

PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	0,8	1,1
Max. relief height mm	1,7	2,0
Temperature resistance	until 50 °C	
Wet room suitability	■ ■ ■ □ □	
Abrasion resistance	■ ■ ■ □ □ □ □	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,2	~ 2,6

PROCESSING


	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	On request	
Screen printing	—	

EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	—	


	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	



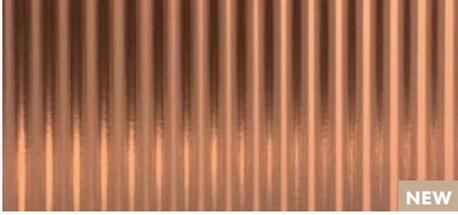


NEW

**SL WAVE 12 Copper brushed AR**  
2600 x 1000 | NA 29195 | SA 29204

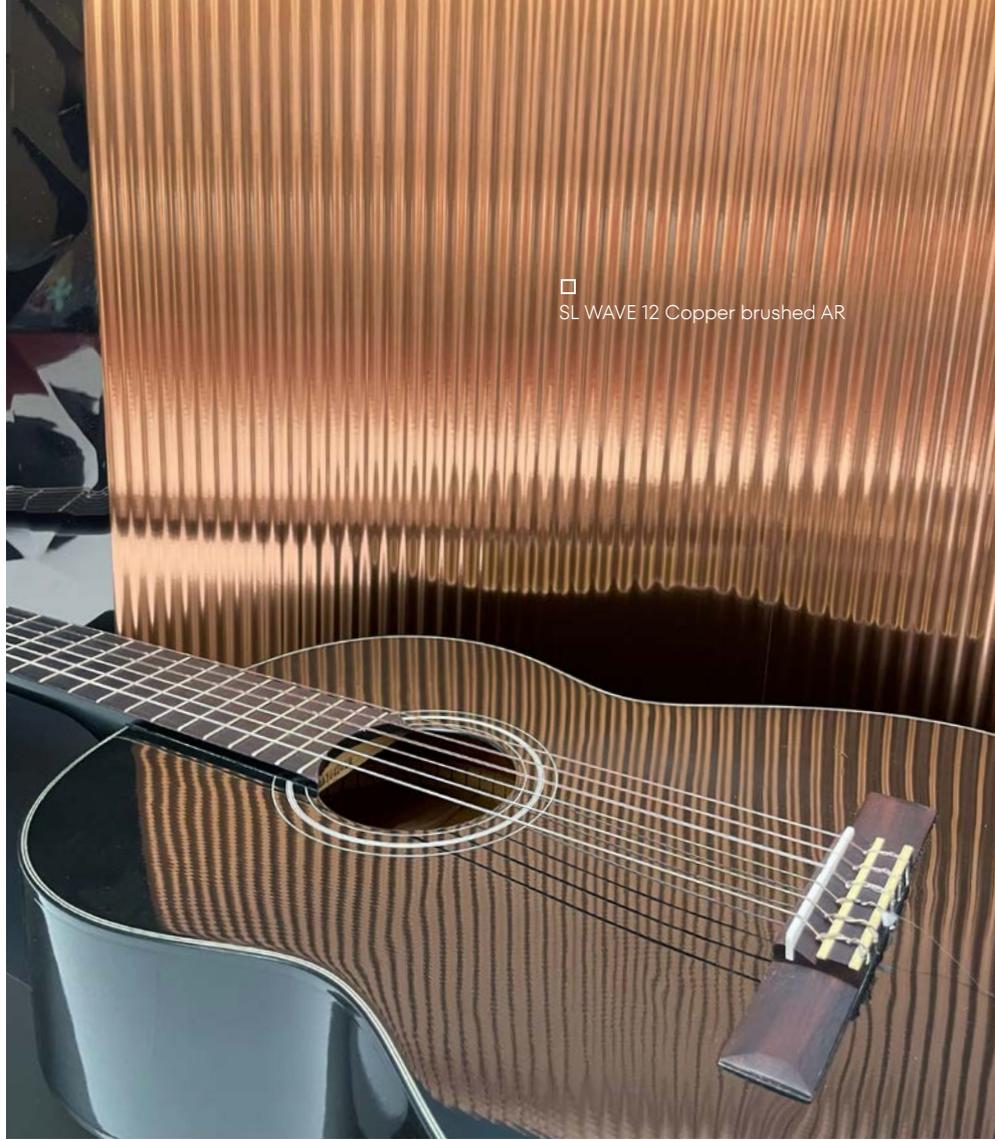

□ SL WAVE 12 Copper brushed AR

2600 x 1000

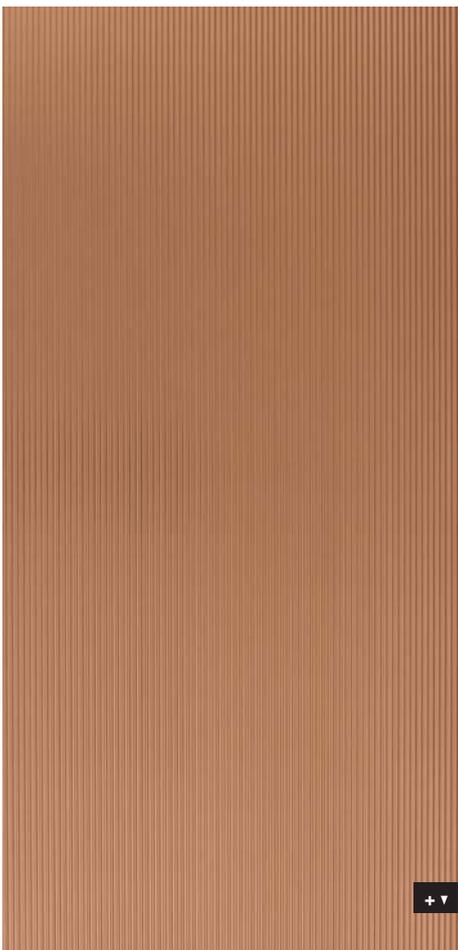

## STRUCTURE COLLECTION

# SL WAVE 12 BRUSHED AR

Due to the pattern, mechanical assembly (screws, spacers) is generally recommended. Applications in the ceiling area must be attached mechanically.

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	0,8	1,1
Max. relief height mm	1,7	2,0
Temperature resistance	until 50 °C	
Wet room suitability	■ ■ ■ □ □	
Abrasion resistance	■ ■ ■ ■ ■ □	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,2	~ 2,6

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	On request	
Screen printing	—	

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	






NEW

**SL GRAIN Anthracite AR**

2600 x 1000 | NA 29250 | SA 29282

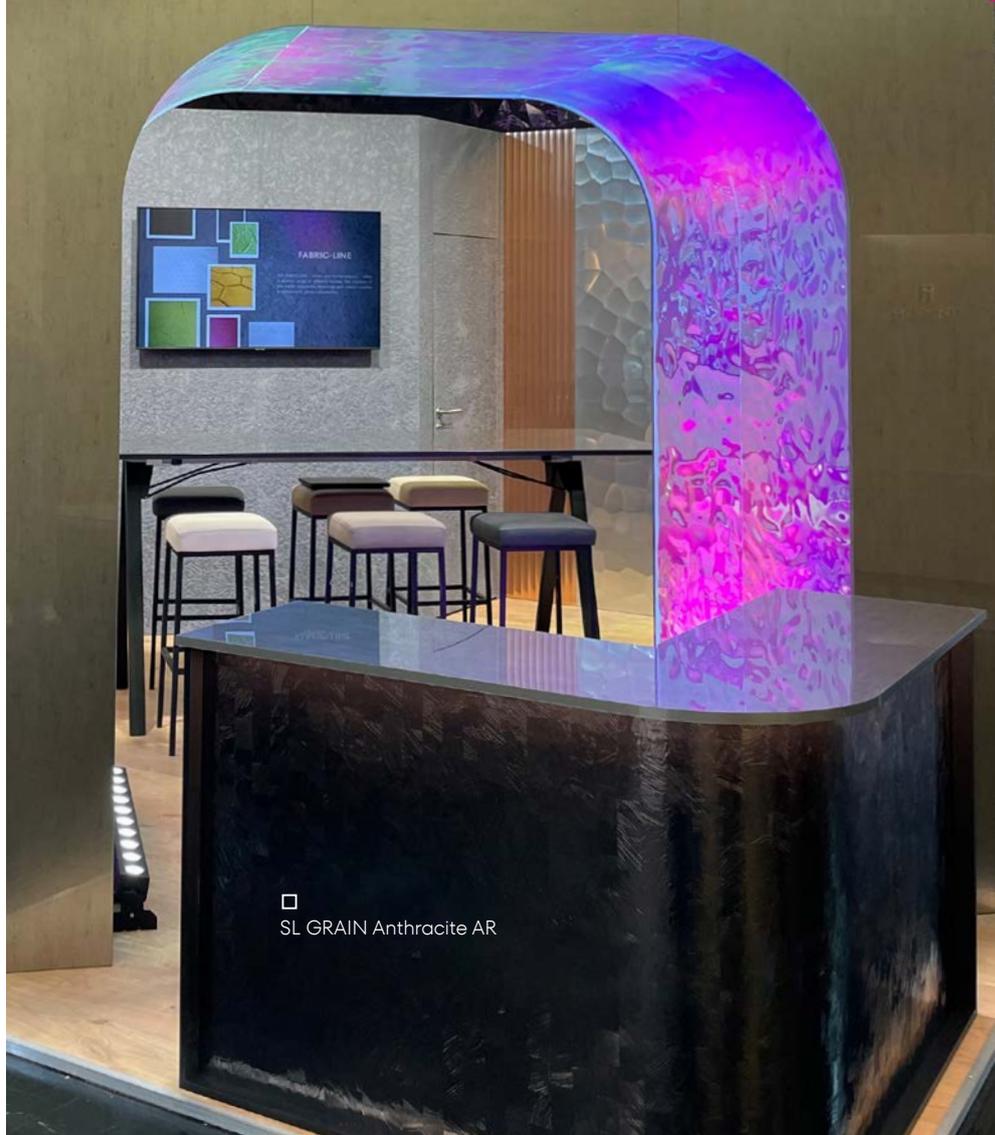

□ SL GRAIN Anthracite AR

Due to the pattern, mechanical assembly (screws, spacers) is generally recommended. Applications in the ceiling area must be attached mechanically.

## STRUCTURE COLLECTION

**SL GRAIN AR**

2600 x 1000



## PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	0,8	1,0
Max. relief height mm	1,0	1,2
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■■■■□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,2	~ 2,6

## PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	—	

\* own printing test required, samples are gladly provided.

## EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	




### SL GRAIN Gold

2600 x 1000 | NA 29249 | SA 29281



### SL GRAIN Silver

2600 x 1000 | NA 29248 | SA 29280

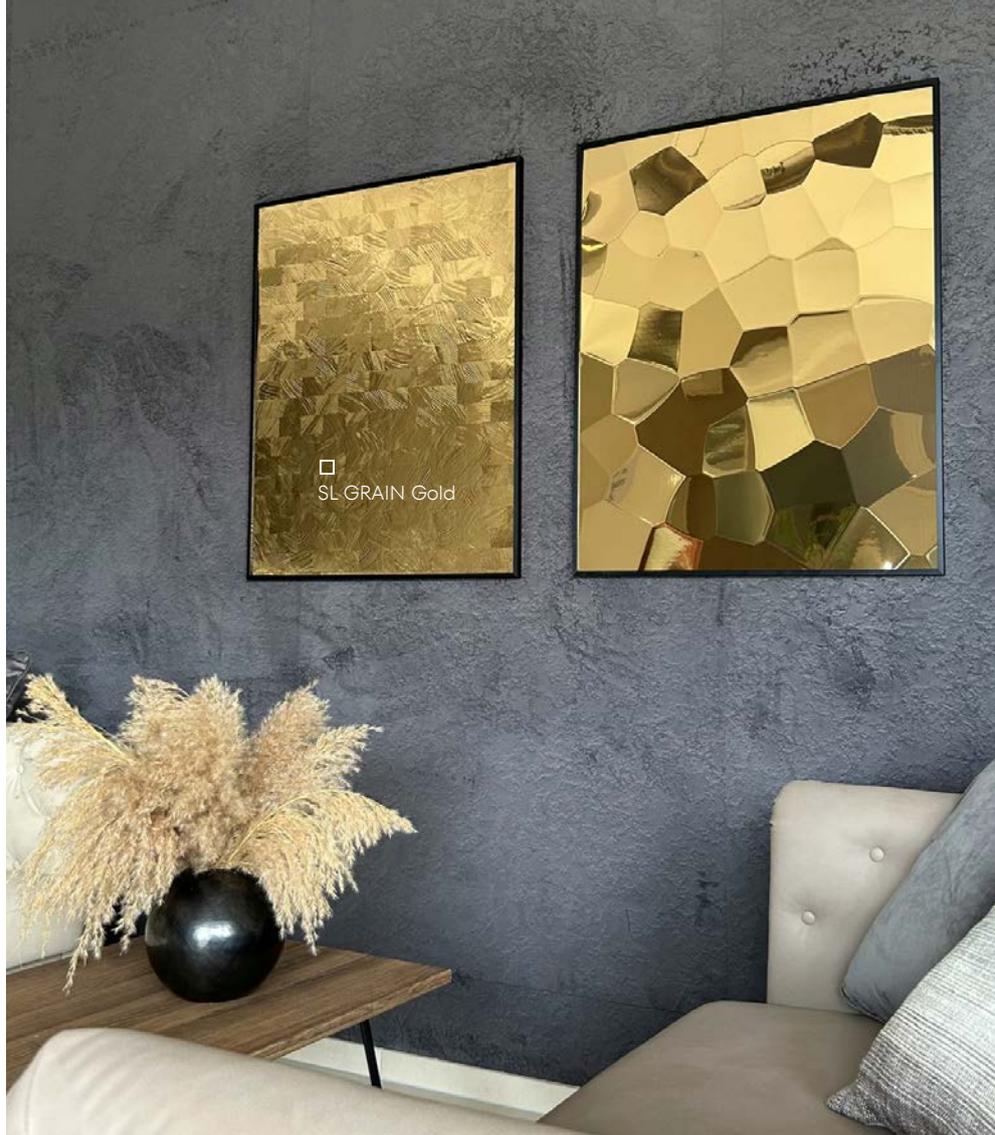

SL GRAIN Gold

Due to the pattern, mechanical assembly (screws, spacers) is generally recommended. Applications in the ceiling area must be attached mechanically.

2600 x 1000



## STRUCTURE COLLECTION

# SL GRAIN

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	0,8	1,0
Max. relief height mm	1,0	1,2
Temperature resistance	until 50 °C	
Wet room suitability	■ ■ ■ □ □	
Abrasion resistance	■ ■ □ □ □ □ □	
Abrasion resistance Silver	■ ■ ■ □ □ □ □	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,2	~ 2,6

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	On request	
Screen printing	—	

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	—	


	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	



NEW

**SL TARGET Anthracite AR**

2600 x 1000 | NA 29262 | SA 29295

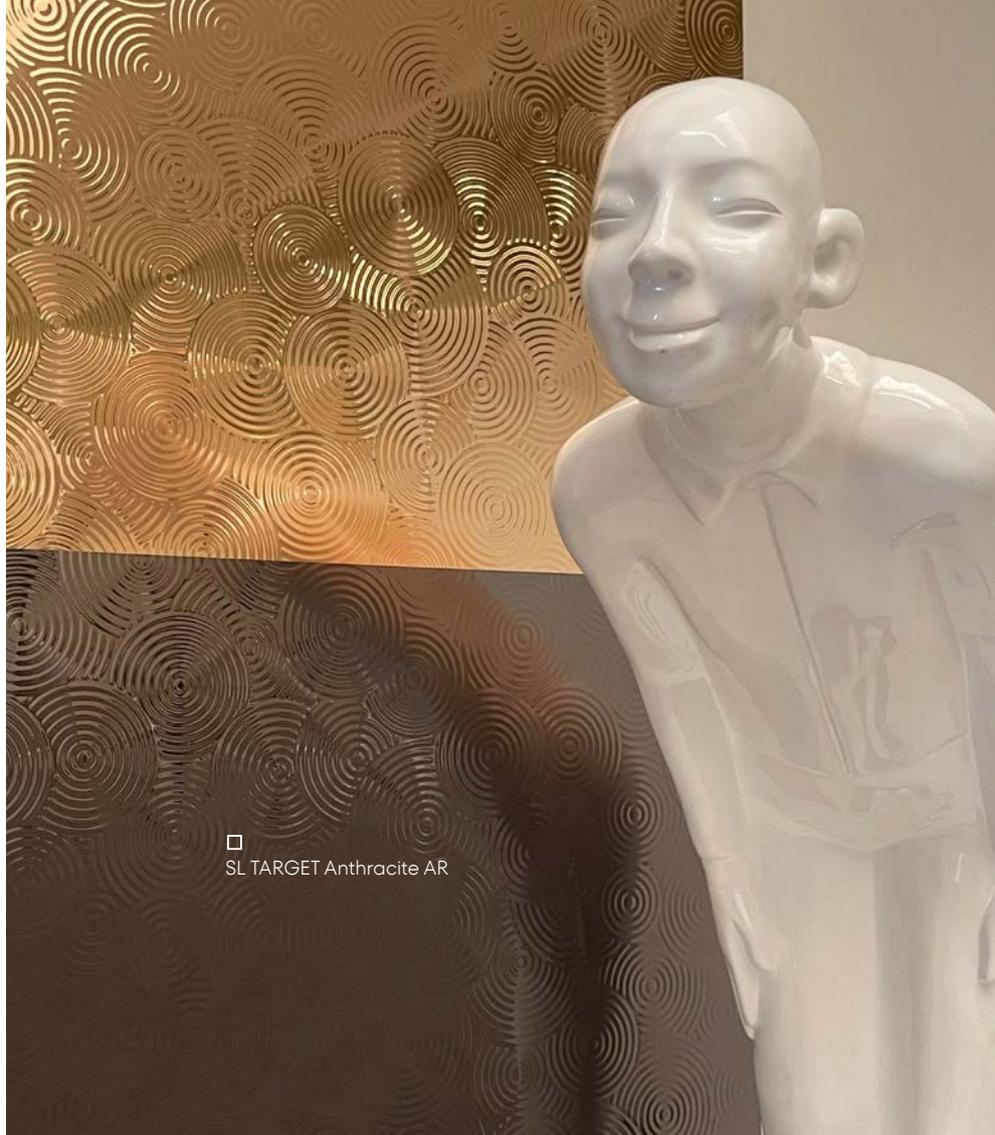

□ SL TARGET Anthracite AR

Due to the pattern, mechanical assembly (screws, spacers) is generally recommended. Applications in the ceiling area must be attached mechanically.

## STRUCTURE COLLECTION

**SL TARGET AR**

2600 x 1000



## PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	2,0	2,3
Max. relief height mm	2,4	2,7
Temperature resistance	until 50 °C	
Wet room suitability	■ ■ ■ ■ □	
Abrasion resistance	■ ■ ■ ■ ■ ■ □	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 2 pcs/carton	—
Smallest bending radius mm	1000	
Weight/panel kg	~ 5,6	~ 6,2

## PROCESSING

	NA	SA
Cutting	✓	
Punching	—	
Drilling	✓	
Sawing, milling	✓	—
Laser cutting	✓	
Hot bending	On request	—
PVA pressing	Conditionally possible	
Digital printing	✓*	
Screen printing	—	

\* own printing test required, samples are gladly provided.

## EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
Glue recommendation	Cartridge adhesive and putty adhesive	—
PVA pre-treatment	—	
Further thicknesses	—	
Magnetic from 3 sheets	—	

	NA	SA
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	On request	

\* In general, WALLFACE® also recommends mechanical attachment.



NEW


**SL TARGET Silver**

2600 x 1000 | NA 29258 | SA 29291


 SL TARGET Silver

Due to the pattern, mechanical assembly (screws, spacers) is generally recommended. Applications in the ceiling area must be attached mechanically.

2600 x 1000

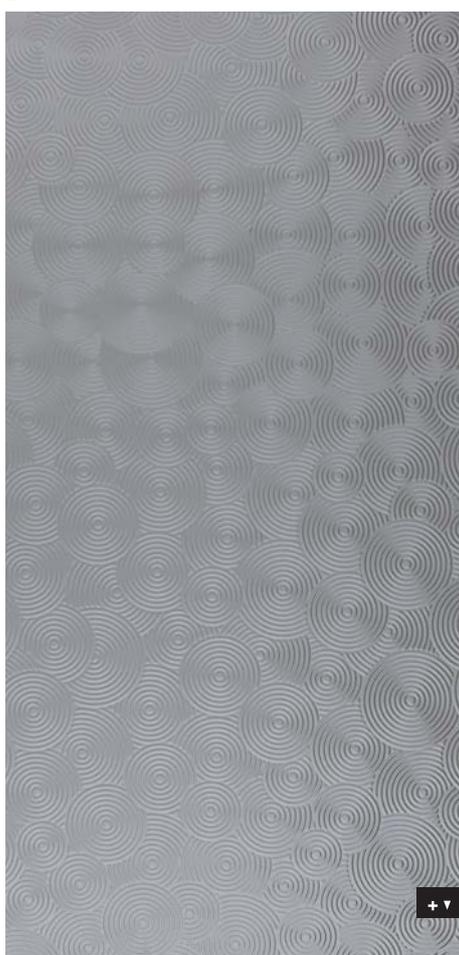

## STRUCTURE COLLECTION

**SL TARGET**

## PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	2,0	2,3
Max. relief height mm	2,4	2,7
Temperature resistance	until 50 °C	
Wet room suitability	■ ■ ■ □ □	
Abrasion resistance	■ ■ ■ □ □ □ □	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 2 pcs/carton	—
Smallest bending radius mm	1000	
Weight/panel kg	~ 5,6	~ 6,2

## PROCESSING


	NA	SA
Cutting	✓	
Punching	—	
Drilling	✓	
Sawing, milling	✓	—
Laser cutting	✓	
Hot bending	On request	—
PVA pressing	Conditionally possible	
Digital printing	On request	
Screen printing	—	

## EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
Glue recommendation	Cartridge adhesive and putty adhesive	—
PVA pre-treatment	—	
Further thicknesses	—	
Magnetic from 3 sheets	—	

	NA	SA
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	On request	

\* In general, WALLFACE® also recommends mechanical attachment.

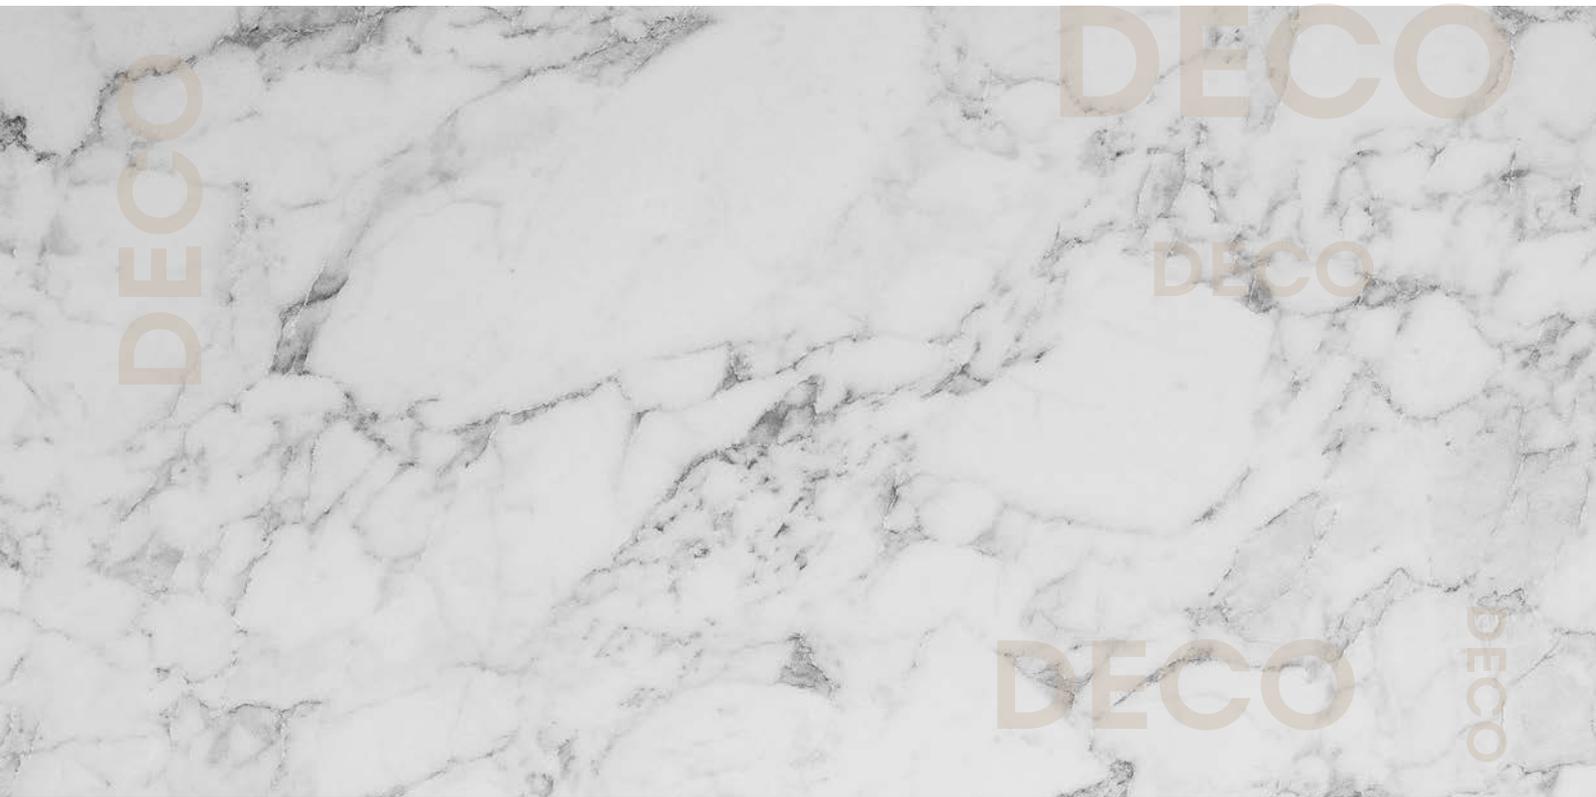

# DECO

# COLLECTION

Decoration



The DECO Collection DECORATION product programme includes a number of varied decorative surfaces: metallic, brushed and vintage, as well as cement, wood and stone looks. Ultra-modern designs as well as evergreens in a wide range of colours.



**DM Corten**

2600 x 1000 | NA 25274 | SA 25276



□  
DM Corten

2600 x 1000



DECO COLLECTION

**DM Corten**

PRODUCT CHARACTERISTICS

	NA	SA
Surface material*	impregnated paper	
Base material	HIPS	
Material thickness mm	1,1	1,3
Temperature resistance	until 50 °C	
Wet room suitability	■■■□	
Abrasion resistance	■■■□□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side inside, max. 3 pcs/carton	✓ decor side inside, max. 3 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,7	~ 3,1

\* The product is delivered without a protective film.

PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing, milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
Thermoforming	—	—
PVA pressing	✓	—
Digital printing	On request	
Screen printing	On request	

EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	





**DM LIMESTONE Grey**

2600 x 1000 | NA 26324 | SA 28808



□ DM LIMESTONE Grey

2600 x 1000



DECO COLLECTION

**DM LIMESTONE Grey**

PRODUCT CHARACTERISTICS

	NA	SA
Surface material*	impregnated paper	
Base material	HIPS	
Material thickness mm	1,1	1,3
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side inside, max. 3 pcs/carton	✓ decor side inside, max. 3 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 27	~ 3,1

\* The product is delivered without a protective film.

PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing, milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
Thermoforming	—	—
PVA pressing	✓	—
Digital printing	On request	
Screen printing	On request	

EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	




### DM CEMENT Light

2600 x 1000 | NA 19087 | SA 19091



□ DM CEMENT Light

2600 x 1000

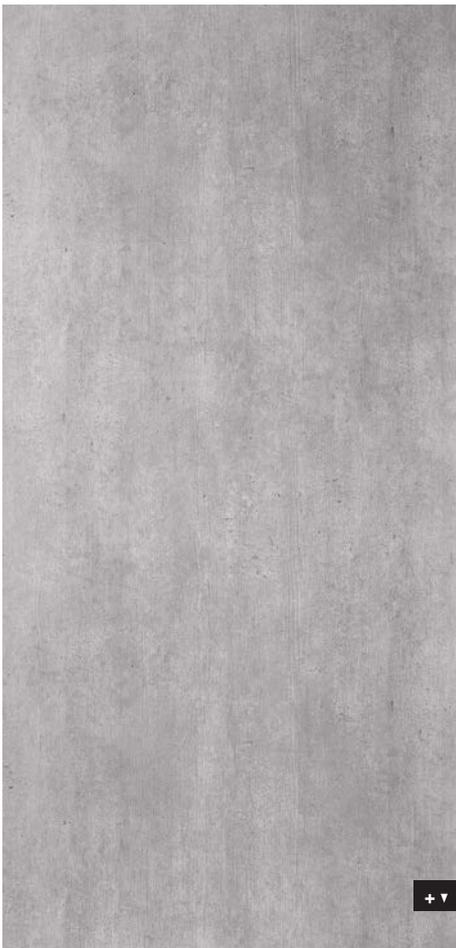

## DECO COLLECTION

# DM CEMENT Light

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material*	impregnated paper	
Base material	HIPS	
Material thickness mm	1,1	1,3
Temperature resistance	until 50 °C	
Wet room suitability	■ ■ ■ □ □	
Abrasion resistance	■ ■ ■ ■ □ □ □	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side inside, max. 3 pcs/carton	✓ decor side inside, max. 3 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,65	~ 3,1

\* The product is delivered without a protective film.

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing, milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
Thermoforming	—	—
PVA pressing	✓	—
Digital printing	On request	
Screen printing	On request	

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	



**DM MARBLE White**

2600 x 1000 | NA 19327 | SA 19338



2600 x 1000



**DECO COLLECTION**

**DM MARBLE White**

**PRODUCT CHARACTERISTICS**

	NA	SA
Surface material*	impregnated paper	
Base material	HIPS	
Material thickness mm	1,1	1,3
Temperature resistance	until 50 °C	
Wet room suitability	■■■□□	
Abrasion resistance	■■■■□□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side inside, max. 3 pcs/carton	✓ decor side inside, max. 3 pcs/carton
Smallest bending radius	150 mm	
Weight/panel kg	~ 3,3	~ 3,7

\* The product is delivered without a protective film.

**PROCESSING**

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing, milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
Thermoforming	—	—
PVA pressing	✓	—
Digital printing	On request	
Screen printing	✓*	

\* own printing test required, samples are gladly provided.

**EXTRA EQUIPMENT | ACCESSORIES**

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	




**DM VINTAGE Copper**

2600 x 1000 | **NA** 17276 | **SA** 17277



**DM VINTAGE Silver**

2600 x 1000 | **NA** 17274 | **SA** 17275

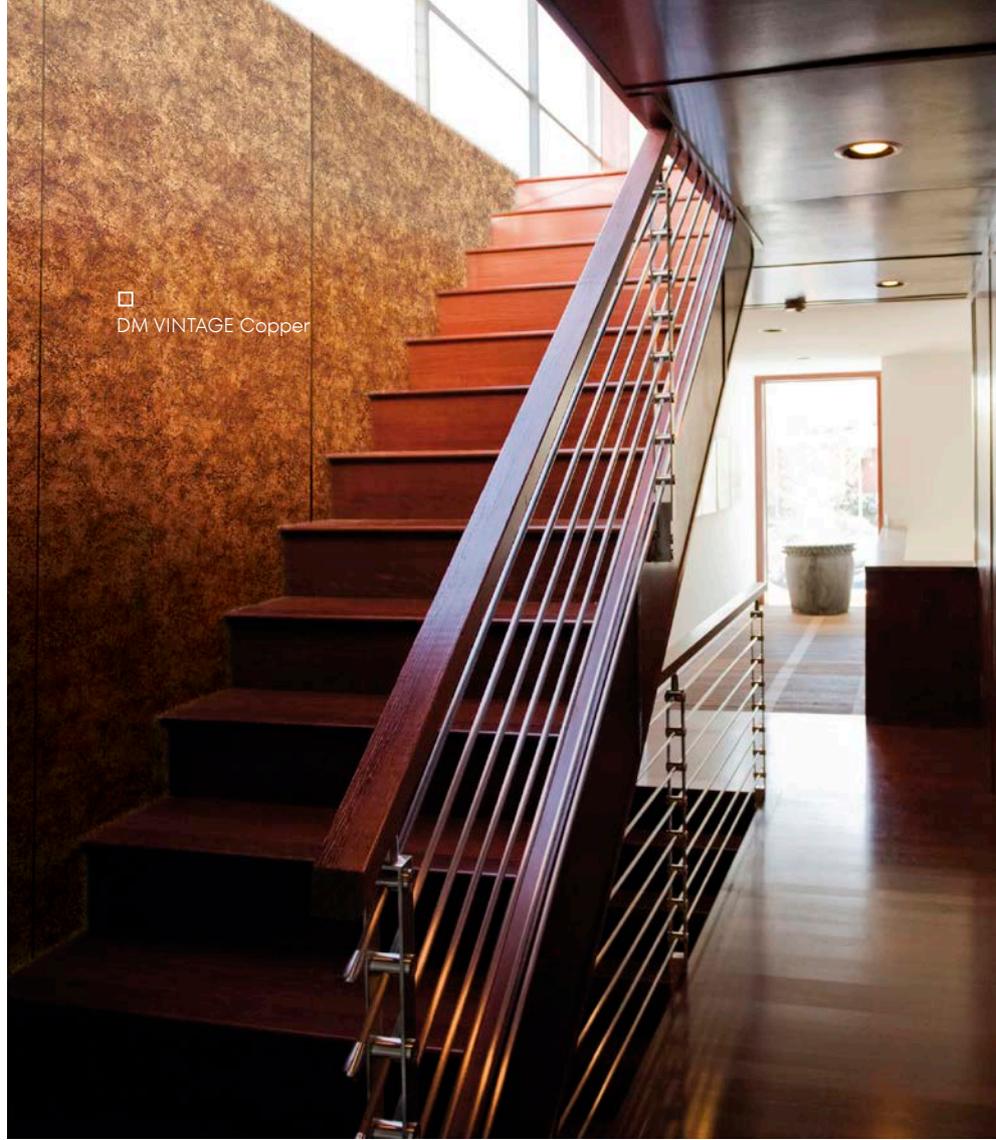

DM VINTAGE Copper

2600 x 1000



**DECO COLLECTION**

**DM Vintage**

**PRODUCT CHARACTERISTICS**

	<b>NA</b>	<b>SA</b>
<b>Surface material</b>	Print	
<b>Base material</b>	HIPS	
<b>Material thickness mm</b>	1,0	1,2
<b>Temperature resistance</b>	until 50 °C	
<b>Wet room suitability</b>	■ ■ ■ □	
<b>Abrasion resistance</b>	■ ■ ■ □ □	
<b>Rolled packable</b> Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
<b>Smallest bending radius mm</b>	150	
<b>Weight/panel kg</b>	~ 2,7	~ 3,1

**PROCESSING**

	<b>NA</b>	<b>SA</b>
<b>Cutting, punching</b>	✓	✓
<b>Drilling</b>	✓	✓
<b>Sawing, milling</b>	✓	—
<b>Laser cutting</b>	✓	✓
<b>Hot bending</b>	✓	—
<b>Thermoforming</b>	✓	—
<b>PVA pressing</b>	✓	—
<b>Digital printing</b>	✓*	
<b>Screen printing</b>	✓*	

\* own printing test required, samples are gladly provided.

**EXTRA EQUIPMENT | ACCESSORIES**

	<b>NA</b>	<b>SA</b>
<b>PVA pre-treatment</b>	✓	—
<b>Special sizes</b>	On request	
<b>Further thicknesses</b>	✓	

	<b>NA</b>	<b>SA</b>
<b>Magnetic</b> from 3 sheets	✓	
<b>Cuttings</b>	✓	
<b>Flammability</b> ASTM E84	✓	
<b>Flammability</b> EN13501-1	✓	





**DM METALLIC USED Sand**  
2600 x 1000 | NA 25349 | SA 25351



□ DM METALLIC USED Sand

2600 x 1000



## DECO COLLECTION

# DM METALLIC USED

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material	Print	
Base material	HIPS	
Material thickness mm	1,0	1,2
Temperature resistance	until 50 °C	
Wet room suitability	■■■□□	
Abrasion resistance	■■■□□□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,7	~ 3,1

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing, milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
Thermoforming	✓	✓
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	✓*	

\* own printing test required, samples are gladly provided.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	



**DM LUXURY Bronze**

2600 x 1000 | **NA** 17825 | **SA** 17846



**DM LUXURY Gold**

2600 x 1000 | **NA** 21391 | **SA** 21392



□ DM LUXURY Bronze

2600 x 1000



**DECO COLLECTION**

**DM LUXURY**

**PRODUCT CHARACTERISTICS**

	<b>NA</b>	<b>SA</b>
<b>Surface material</b>	Print	
<b>Base material</b>	HIPS	
<b>Material thickness mm</b>	1,0	1,2
<b>Temperature resistance</b>	until 50 °C	
<b>Wet room suitability</b>	■■■□□	
<b>Abrasion resistance</b>	■■■□□□□	
<b>Rolled packable</b> Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
<b>Smallest bending radius mm</b>	150	
<b>Weight/panel kg</b>	~ 2,7	~ 3,1

**PROCESSING**

	<b>NA</b>	<b>SA</b>
<b>Cutting, punching</b>	✓	✓
<b>Drilling</b>	✓	✓
<b>Sawing, milling</b>	✓	—
<b>Laser cutting</b>	✓	✓
<b>Hot bending Gold</b>	—	—
<b>Hot bending Bronze</b>	✓	—
<b>Thermoforming Gold</b>	—	—
<b>Thermoforming Bronze</b>	✓	—
<b>PVA pressing</b>	✓	—
<b>Digital printing</b>	✓*	
<b>Screen printing</b>	✓*	

\* own printing test required, samples are gladly provided.

**EXTRA EQUIPMENT | ACCESSORIES**

	<b>NA</b>	<b>SA</b>
<b>PVA pre-treatment</b>	✓	—
<b>Special sizes</b>	On request	
<b>Further thicknesses</b>	✓	

	<b>NA</b>	<b>SA</b>
<b>Magnetic</b> from 3 sheets	✓	
<b>Cuttings</b>	✓	
<b>Flammability</b> ASTM E84	✓	
<b>Flammability</b> EN13501-1	✓	





**DM CLASSY Black AR**  
2600 x 1000 | NA 19325 | SA 19336



**DM CLASSY Gold**  
2600 x 1000 | NA 24555 | SA 24557



□  
DM CLASSY Gold

## DECO COLLECTION

# DM CLASSY

2600 x 1000



### PRODUCT CHARACTERISTICS

	NA	SA
Surface material	Print	
Base material	HIPS	
Material thickness mm	1,0	1,2
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□□	
Abrasion resistance Black	■■■■■□□	
Abrasion resistance Gold	■■■■□□□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,7	~ 3,1

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing, milling	✓	—
Laser cutting	✓	✓
Hot bending Black	—	—
Hot bending Gold	✓	—
Thermoforming Black	—	—
Thermoforming Gold	✓	—
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	✓*	

\* own printing test required, samples are gladly provided.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	



**DM OXIDIZED Copper**  
2600 x 1000 | NA 26522 | SA 26523




□ DM OXIDIZED Copper

## DECO COLLECTION

# DM OXIDIZED

2600 x 1000

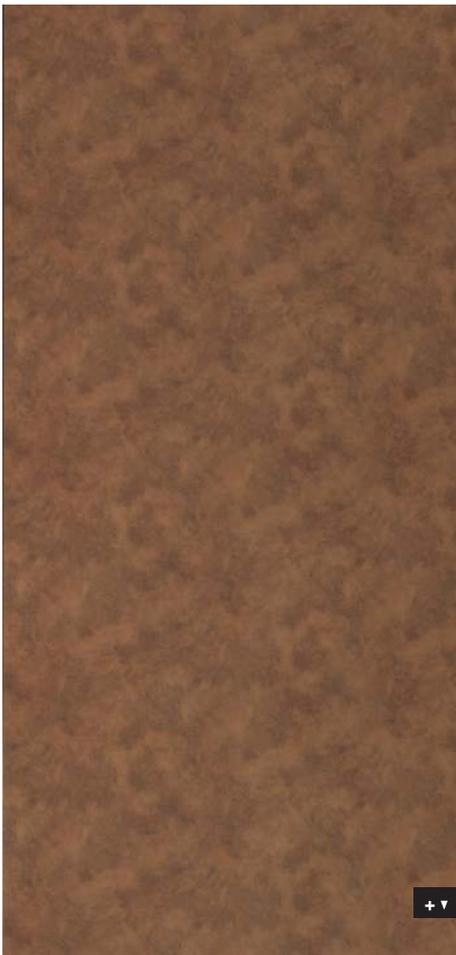

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material	Print	
Base material	HIPS	
Material thickness mm	1,0	1,2
Temperature resistance	until 50 °C	
Wet room suitability	■ ■ ■ □	
Abrasion resistance	■ ■ ■ □ □ □	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,7	~ 3,1

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing, milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
Thermoforming	✓	—
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	✓*	

\* own printing test required, samples are gladly provided.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	



**DM Smoke PF AR**

2600 x 1000 | **NA** 10385 | **SA** 10389



□ DM Smoke PF AR

**DECO COLLECTION**

abrasion-resistant

**DM PF AR**

**PRODUCT CHARACTERISTICS**

	NA	SA
Surface material	Print	
Base material	HIPS	
Material thickness mm	1,0	1,2
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■■□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,7	~ 3,1

**PROCESSING**

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing, milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
Thermoforming	✓	—
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	✓*	

\* own printing test required, samples are gladly provided.

**EXTRA EQUIPMENT | ACCESSORIES**

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	



**DM MONSOON VINTAGE Brown**  
2600 x 1000 | NA 17033 | SA 17037



DM MONSOON  
VINTAGE Brown

2600 x 1000



## DECO COLLECTION

# DM MONSOON

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material*	Print	
Base material	HIPS	
Material thickness mm	1,0	1,2
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■□□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,7	~ 3,1

\* The product is delivered without a protective film.

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing, milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
Thermoforming	—	—
PVA pressing	✓	—
Digital printing	On request	
Screen printing	✓*	

\* own printing test required, samples are gladly provided.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	



**DM CONCRETE Grey AR**  
2600 x 1000 | NA 22827 | SA 22828



□ DM CONCRETE Grey AR

Photo: YEDA DESIGN

## DECO COLLECTION

abrasion-resistant

2600 x 1000



# DM CONCRET Grey AR

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material*	PP	
Base material	HIPS	
Material thickness mm	1,1	1,3
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■■□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side inside, max. 3 pcs/carton	✓ decor side inside, max. 3 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 3,0	~ 3,4

\* The product is delivered without a protective film.

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing, milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
Thermoforming	—	—
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	✓*	

\* own printing test required, samples are gladly provided.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	



**WL Carbonized Wood**  
2600 x 1000 | NA 25152 | SA 25154



Photo: raumArt Ender

2600 x 1000



## DECO COLLECTION

# WL Carbonized Wood

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material*	impregnated paper	
Base material	HIPS	
Material thickness mm	1,1	1,3
Temperature resistance	until 50 °C	
Wet room suitability	■■■□□	
Abrasion resistance	■■■□□□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side inside, max. 3 pcs/carton	✓ decor side inside, max. 3 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,8	~ 3,2

\* The product is delivered without a protective film.

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing, milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
Thermoforming	—	—
PVA pressing	✓	—
Digital printing	—	
Screen printing	On request	

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	



### WL Nutwood

2600 x 1000 x 1 | **NA** 25155 | **SA** 25159

2600 x 1000 x 1,2 | **NA** 19019 | **SA** 19030 - Discontinued item



□  
WL Nutwood

2600 x 1000



## DECO COLLECTION

# WL Nutwood

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material*	impregnated paper	
Base material	HIPS	
Material thickness mm	1,0	1,2
Temperature resistance	until 50 °C	
Wet room suitability	■■■□□	
Abrasion resistance	■■■□□□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side inside, max. 3 pcs/carton	✓ decor side inside, max. 3 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,8	~ 3,2

\* The product is delivered without a protective film.

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing, milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
Thermoforming	—	—
PVA pressing	✓	—
Digital printing	—	
Screen printing	On request	

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	—
Cuttings	✓	—
Flammability ASTM E84	—	—
Flammability EN13501-1	—	—



**WL OAK TREE Light**

2600 x 1000 | NA 17278 | SA 17279



2600 x 1000



**DECO COLLECTION**

**WL OAK TREE Light**

**PRODUCT CHARACTERISTICS**

	NA	SA
Surface material*	impregnated paper	
Base material	HIPS	
Material thickness mm	1,1	1,3
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side inside, max. 3 pcs/carton	✓ decor side inside, max. 3 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,8	~ 3,2

\* The product is delivered without a protective film.

**PROCESSING**

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing, milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
Thermoforming	—	—
PVA pressing	✓	—
Digital printing	On request	
Screen printing	On request	

**EXTRA EQUIPMENT | ACCESSORIES**

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	





DECO

DECO

DECO

DECO

DECO

# DECO

# COLLECTION

Display


The DECO Collection DISPLAY product programme includes polychrome surfaces, brilliant mirrors and brushed designs in a wide range of colours. Particularly suitable for display and shop windows.



**DM OPTICAL MIRROR Fashion Grey AR**  
2800 x 1250 | NA 21244



**DM OPTICAL MIRROR Anthracite AR**  
2800 x 1250 | NA 21241

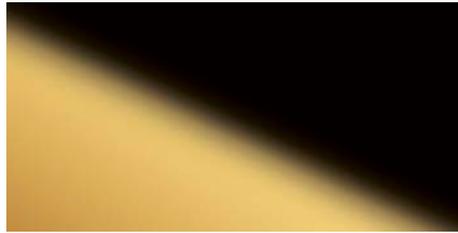


**DM OPTICAL MIRROR Gold AR**  
2800 x 1250 | NA 21243



**DM OPTICAL MIRROR Brass AR**  
2800 x 1250 | NA 21242



**DM OPTICAL MIRROR Silver AR**  
2800 x 1250 | NA 20877

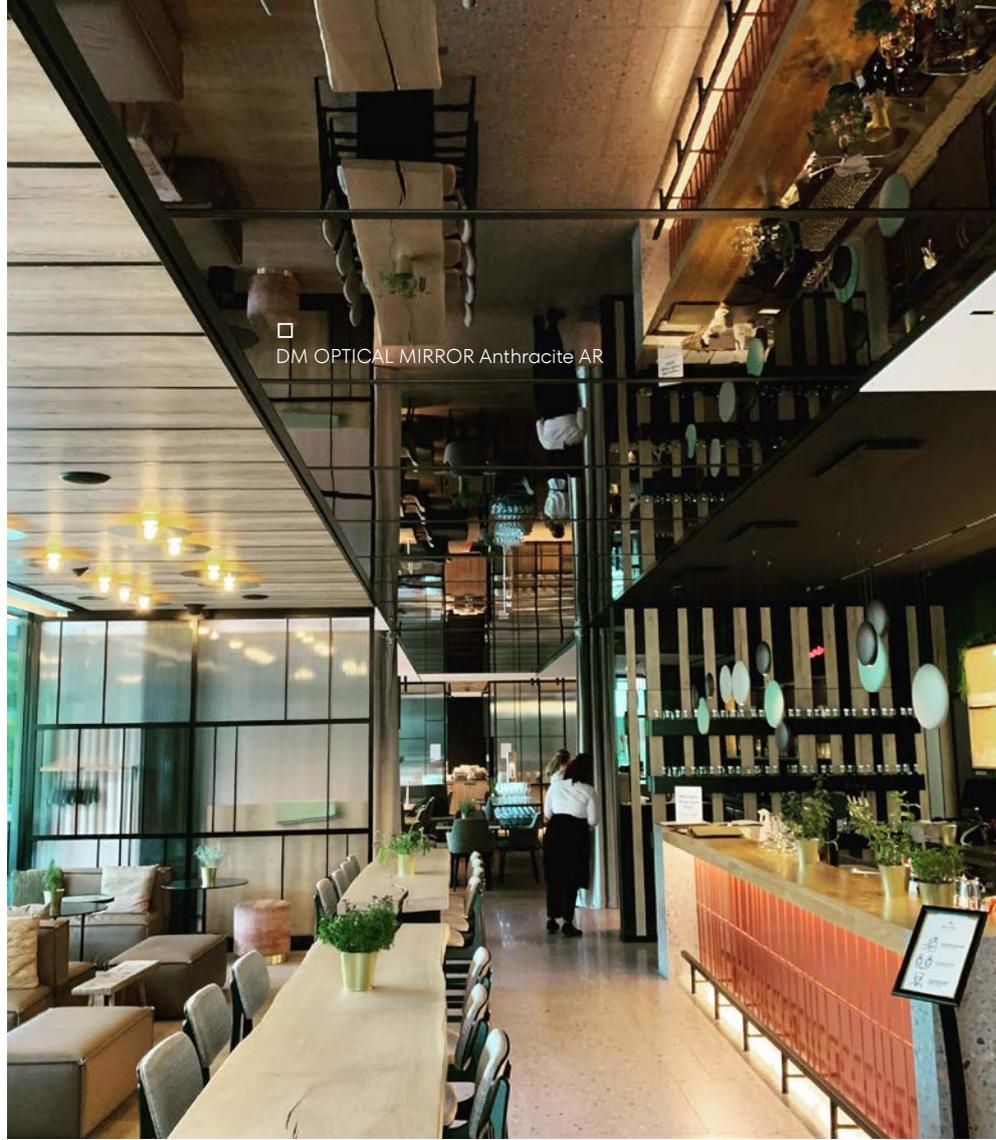

## DECO COLLECTION

abrasion-resistant

# DM OPTICAL MIRROR AR

### PRODUCT CHARACTERISTICS

	NA
Surface material	PET
Base material	HIPS
Material thickness mm	1,0
Temperature resistance	until 50 °C
Wet room suitability	■■■■□
Abrasion resistance	■■■■■■□
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 4 pcs/carton
Smallest bending radius mm	150
Weight/panel kg	~ 3,65

### PROCESSING

	NA
Cutting, punching	✓
Drilling	✓
Sawing, milling	✓
Laser cutting	✓
Hot bending	✓
Thermoforming	—
PVA pressing	✓
Digital printing	—
Screen printing	—

### EXTRA EQUIPMENT | ACCESSORIES

	NA
PVA pre-treatment	✓
Special sizes	On request
Further thicknesses	✓

	NA
Magnetic from 3 sheets	—
Cuttings	✓
Flammability ASTM E84	—
Flammability EN13501-1	—



**DM Brown AR**

2600 x 1000 | NA 10147 | SA 10150



**DM Red Brown AR**

2600 x 1000 | NA 28498 | SA 28499




**DM Rosegold AR**

2600 x 1000 | NA 20955 | SA 20956



**DM Gold AR**

2600 x 1000 | NA 10181 | SA 10187

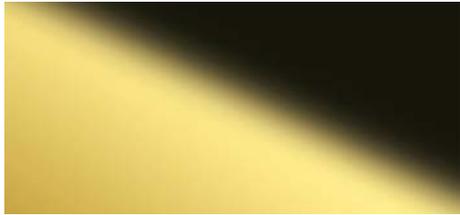

**DM Brass AR**

2600 x 1000 | NA 10135 | SA 10139



**DM Gold 30 AR**

2600 x 1000 | NA 25572 | SA 25573



**DM Fashion Gold AR**

2600 x 1000 | NA 25322 | SA 25323



**DECO COLLECTION**

abrasion-resistant

# DM Mirror AR

**PRODUCT CHARACTERISTICS**

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	1,0	1,2
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■■■□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius	150 mm	
Weight/panel kg	~ 2,7	~ 3,1

**PROCESSING**

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing, milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
Thermoforming	✓	—
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	✓*	

\* own printing test required, samples are gladly provided.

**EXTRA EQUIPMENT | ACCESSORIES**

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	



**DM Fashion Grey AR**

2600 x 1000 | **NA** 13808 | **SA** 13810



**DM Anthracite AR**

2600 x 1000 | **NA** 10120 | **SA** 10125



**DM Fashion Red AR**

2600 x 1000 | **NA** 22387 | **SA** 23388



**DM Iceblue AR**

2600 x 1000 | **NA** 10204 | **SA** 10210



□ DM Fashion Red (printed)

Photo: © Form Factory

**DECO COLLECTION**

abrasion-resistant

# DM Mirror AR

**PRODUCT CHARACTERISTICS**

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	1,0	1,2
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■■■□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius	150 mm	
Weight/panel kg	~ 2,7	~ 3,1

**PROCESSING**

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing, milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
Thermoforming	✓	—
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	✓*	

\* own printing test required, samples are gladly provided.

**EXTRA EQUIPMENT | ACCESSORIES**

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	



**DM Gold**

2600 x 1000 | NA 25077 | SA 25078



DM Gold

Photo: Beth Crockatt Photography

**DECO COLLECTION**

**DM Mirror**

**PRODUCT CHARACTERISTICS**

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	1,0	1,2
Temperature resistance	until 50 °C	
Wet room suitability	■■■□	
Abrasion resistance	■■□□□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius	150 mm	
Weight/panel kg	~ 2,7	~ 3,1

**PROCESSING**

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing, milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
Thermoforming	✓	—
PVA pressing	✓	—
Digital printing	On request	
Screen printing	✓*	

\* own printing test required, samples are gladly provided.

**EXTRA EQUIPMENT | ACCESSORIES**

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	

### DM Silver

2600 x 1000 / 1 mm | **NA** 10312 | **SA** 10324  
 2000 x 1000 / 1 mm | **NA** 10304 | **SA** 10322

### DM Silver/White

2000 x 1000 / 1 mm | **NA** 10372 | **SA** 10381



## DECO COLLECTION

# DM Mirror

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	1,0	1,2
Temperature resistance	until 50 °C	
Wet room suitability	■■■□	
Abrasion resistance	■■■□□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius	150 mm	
Weight/panel kg Silver (H: 2000 / H: 2600)	~ 2,1 / ~ 2,7	~ 2,5 / ~ 3,1
Weight/panel kg Silver/White (2000x1000x1)	~ 2,1	~ 2,5

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing, milling	✓	—
Laser cutting	✓	✓
Thermoforming	✓	—
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	On request	
Screen printing	✓*	

\* own printing test required, samples are gladly provided.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	



**DM Aqua**

2600 x 1000 | **NA** 18424 | **SA** 18443



**DM Hollywood Blue**

2600 x 1000 | **NA** 20945 | **SA** 21272



**DM Hollywood**

2600 x 1000 | **NA** 18433 | **SA** 18442



Photo Diana Iskander

## DECO COLLECTION

# DM Mirror

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	1,0	1,2
Temperature resistance	until 50 °C	
Wet room suitability	■■■□□	
Abrasion resistance	■■□□□□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius	150 mm	
Weight/panel kg	~ 2,7	~ 3,1

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing, milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
Thermoforming	✓	—
PVA pressing	✓	—
Digital printing	✓	
Screen printing	✓	

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓ DM Hollywood + Blue	
Flammability EN13501-1	✓ DM Hollywood + Blue	

### DM Magic Black AR

2600 x 1000 | NA 15415 | SA 15423



### DM Magic White AR

2600 x 1000 | NA 15414 | SA 15422



Photo: SU VALGUS

## DECO COLLECTION

abrasion-resistant

# DM Magic AR

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	1,0	2,0
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■■□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,7	~ 3,1

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing, milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
Thermoforming	✓	—
PVA pressing	✓	—
Digital printing	On request	
Screen printing	On request	

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	

### DM Graphite Black matt

2600 x 1000 | NA 23144 | SA 23147



DM Graphite Black matt

### DM Snow White matt

2600 x 1000 | NA 23145 | SA 23146



## DECO COLLECTION

# DM matt

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	1,0	1,2
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,7	~ 3,1

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing, milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
Thermoforming	✓	—
PVA pressing	✓	—
Digital printing	On request	
Screen printing	On request	


### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓ Snow White	
Flammability EN13501-1	✓ Snow White	

**DM Gold MMS**

2600 x 1000 | NA 20500 | SA 20502

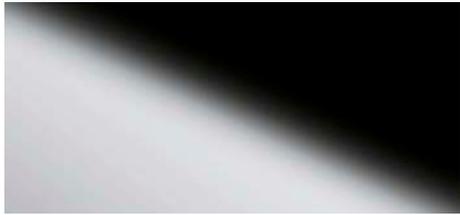

**DM Silver MMS**

2600 x 1000 | NA 20499 | SA 20501



**DECO COLLECTION**

**DM MMS**

**PRODUCT CHARACTERISTICS**

	NA	SA
Surface material	Print	
Base material	HIPS	
Material thickness mm	1,0	1,2
Temperature resistance	until 50 °C	
Wet room suitability	■ ■ ■ □ □	
Abrasion resistance	■ □ □ □ □ □ □	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius	150 mm	
Weight/panel kg	~ 2,6	~ 3,0

**PROCESSING**

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing, milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
Thermoforming	—	—
PVA pressing	✓	—
Digital printing	—	
Screen printing	✓*	

\* own printing test required, samples are gladly provided.

**EXTRA EQUIPMENT | ACCESSORIES**

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	



NOT IN STOCK

**DM Brass brushed matt AR**  
2600 x 1000 | NA 15290 | SA 15298



NOT IN STOCK

**DM Grey brushed matt AR**  
2600 x 1000 | NA 15289 | SA 15297



Photo: Carini GmbH

## DECO COLLECTION

abrasion-resistant

2600 x 1000



# DM Brushed matt AR

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	1,0	1,2
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■■■□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius	150 mm	
Weight/panel kg	~ 2,7	~ 3,1

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing, milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
Thermoforming	✓	—
PVA pressing	✓	—
Digital printing	—	
Screen printing	✓ DM Grey brushed matt AR	

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	



**DM Copper brushed AR**

2600 x 1000 / **NA** 12418 / **SA** 12432



**DM Champagne brushed AR**

2600 x 1000 | **NA** 12417 | **SA** 12433



**DM Green Steel brushed AR**

2600 x 1000 | **NA** 30467 | **SA** 30468



□  
DM Green Steel  
brushed AR

**DECO COLLECTION**

abrasion-resistant

2600 x 1000



# DM Brushed AR

**PRODUCT CHARACTERISTICS**

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	1,0	1,2
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■■■□	
Abrasion resistance Green Steel brushed AR	■■■■■■□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius	150 mm	
Weight/panel kg	~ 2,7	~ 3,1

**PROCESSING**

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing, milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
Thermoforming	✓	—
PVA pressing	✓	—
Digital printing	On request	
Screen printing	✓	

**EXTRA EQUIPMENT | ACCESSORIES**

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	



**DM Silver brushed**

2600 x 1000 | NA 10291 | SA 10298



DM Silver brushed

Photo: CATOIR RAMAHI Visual Performers

**DECO COLLECTION**

2600 x 1000



**DM Brushed**

**PRODUCT CHARACTERISTICS**

	NA	SA
Surface material	PET	
Base material	HIPS	
Material thickness mm	1,0	1,2
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■□□□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side inside, max. 6 pcs/carton
Smallest bending radius	150 mm	
Weight/panel kg	~ 2,7	~ 3,1

**PROCESSING**

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing, milling	✓	—
Laser cutting	✓	✓
Hot bending	✓	—
Thermoforming	✓	—
PVA pressing	✓	—
Digital printing	✓	
Screen printing	✓	

**EXTRA EQUIPMENT | ACCESSORIES**

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	✓	
Flammability EN13501-1	✓	

M-STYLE


M-STYLE

M-STYLE


M-STYLE

M-STYLE

# M-STYLE COLLECTION

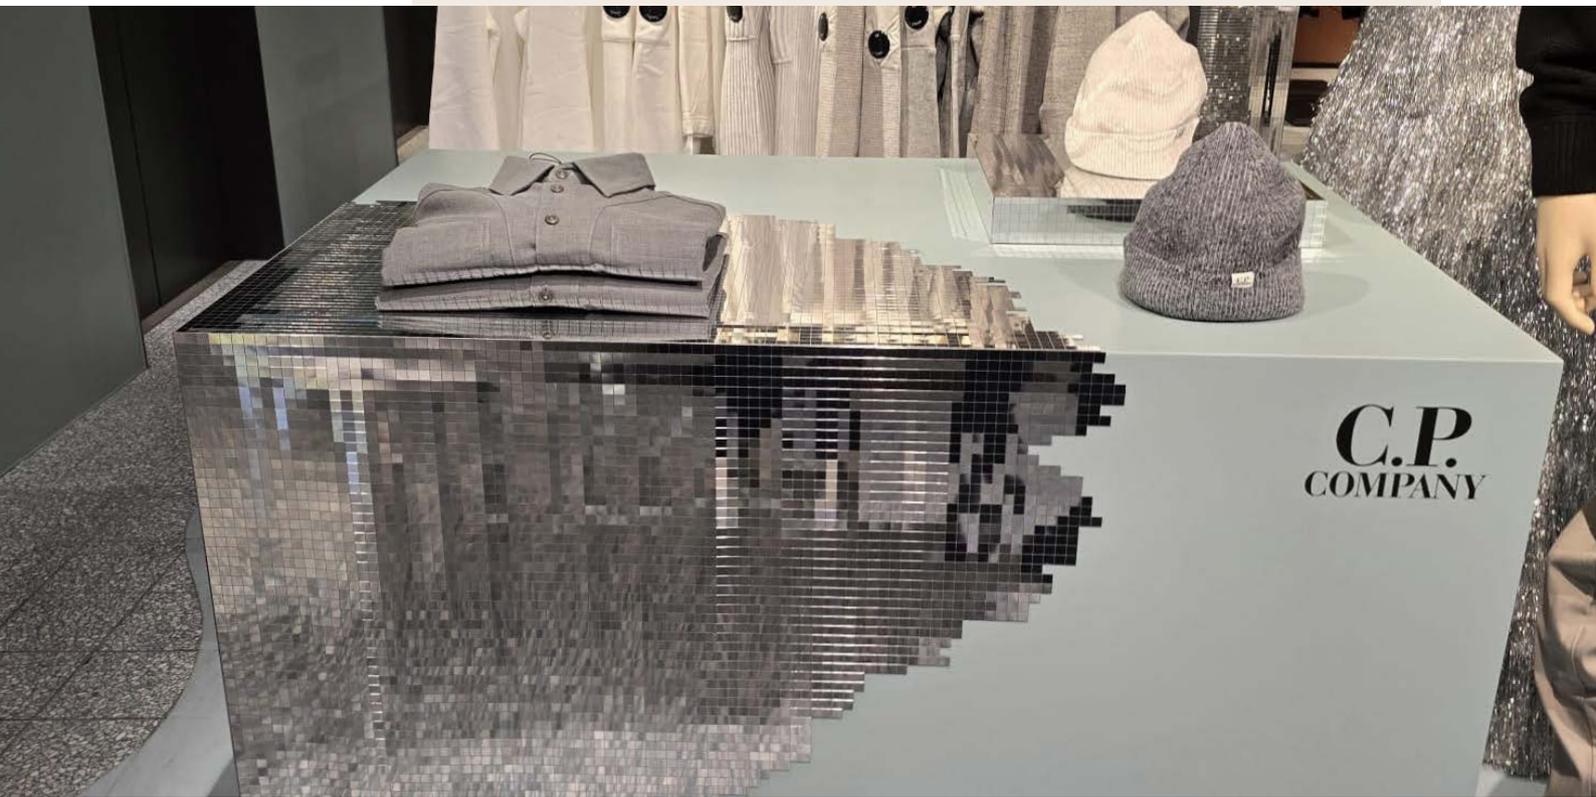

The M-STYLE mirror surfaces in a noble mosaic look are particularly flexible and can be glued over curves without any problems. A must have in the display and decoration sector.

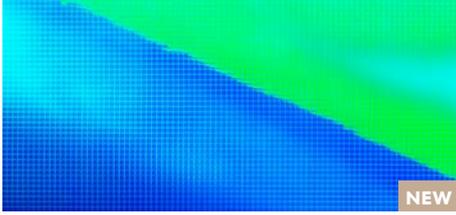

NEW


**MS 5x5 flex Aqua**  
980 x 980 | SA 27809




**MS 5x5 flex Hollywood**  
980 x 980 | SA 27376



**MS 5x5 flex Gold**  
980 x 980 | SA 27373

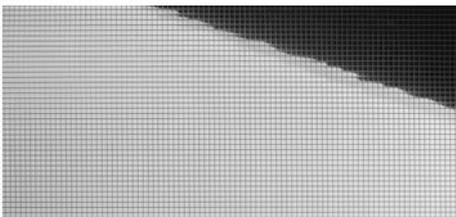

**MS 5x5 flex Silver**  
980 x 980 | SA 27377

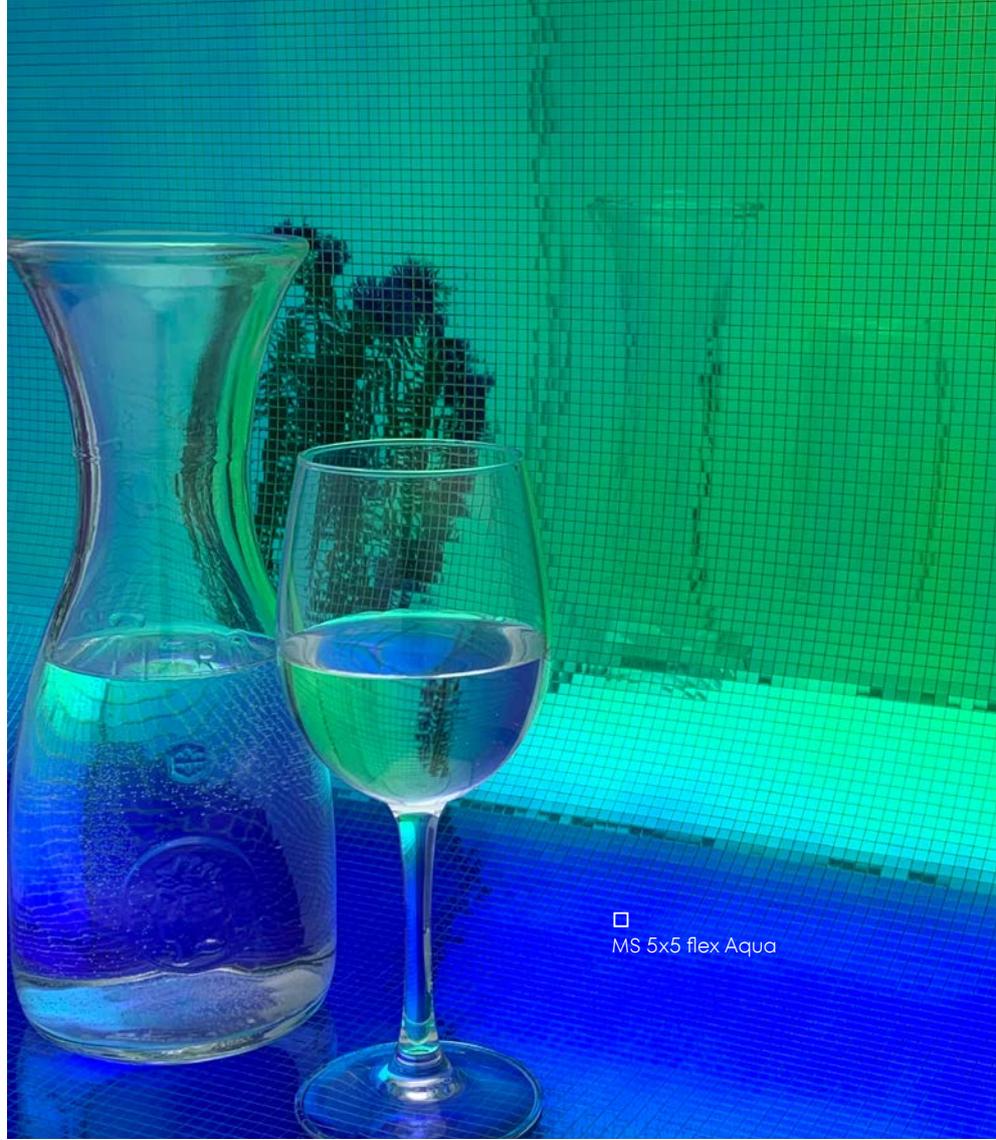

## M-STYLE COLLECTION

# MS 5x5

### PRODUCT CHARACTERISTICS

	SA
Surface material	PET
Base material	HIPS
Material thickness mm	1,2
Temperature resistance	until 50 °C
Wet room suitability	■ ■ □ □
Abrasion resistance	■ ■ □ □ □ □
Abrasion resistance	■ ■ ■ ■ ■ □
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton
Smallest bending radius mm	20
Weight/panel kg	~ 1,24

### PROCESSING


	SA
Cutting, punching	✓
Drilling	✓
Sawing, milling	—
Laser cutting	✓
Hot bending	—
Thermoforming	—
PVA pressing	—
Digital printing Hollywood, Aqua	✓*
Digital printing Gold, Silver	On request*
Screen printing	—

\* own printing test required, samples are gladly provided.


### EXTRA EQUIPMENT | ACCESSORIES

	SA
PVA pre-treatment	—
Special sizes	✓
Maximum length mm	3000
Maximum width mm	1000


	SA
Further thicknesses	—
Magnetic from 3 sheets	✓
Cuttings	✓
Flammability ASTM E84	—
Flammability EN13501-1	—

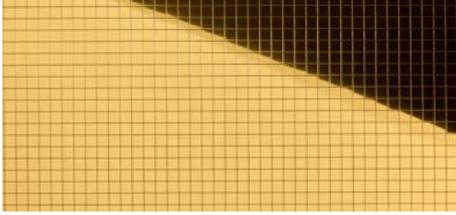


**MS 10x10 flex Gold**  
980 x 980 | SA 27374

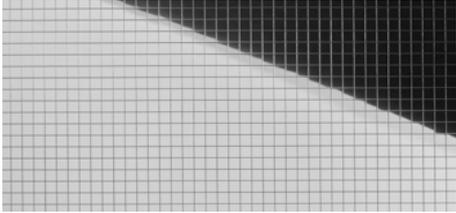


**MS 10x10 flex Silver**  
980 x 980 | SA 27378

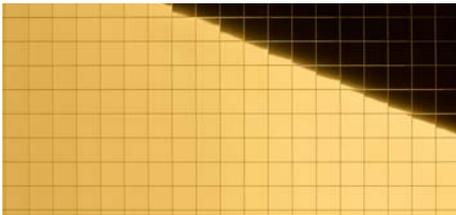

**MS 20x20 flex Gold**  
980 x 980 | SA 27375

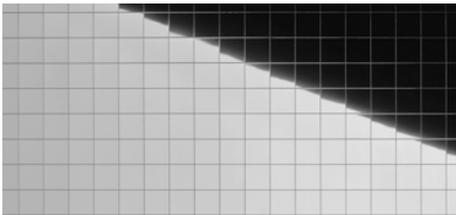

**MS 20x20 flex Silver**  
980 x 980 | SA 27379

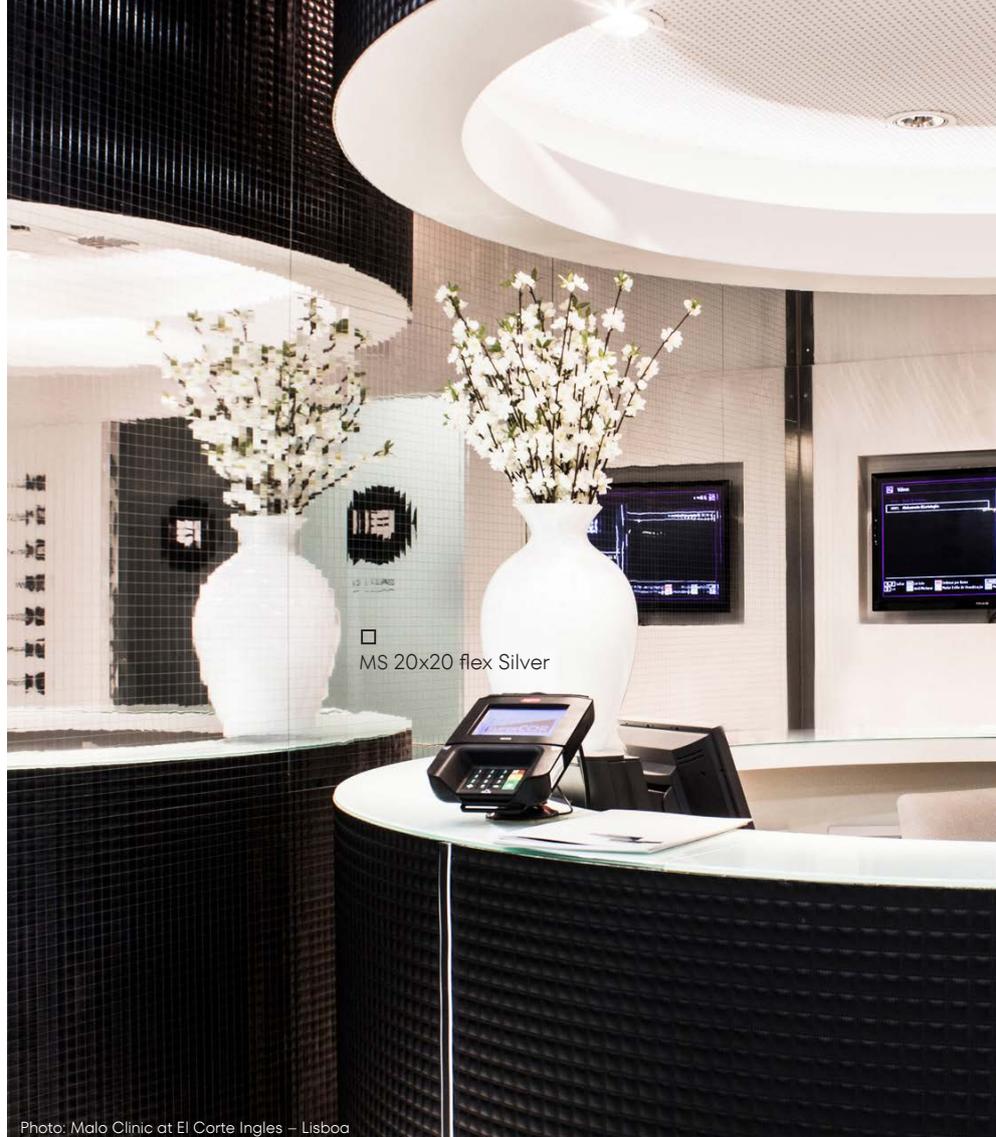

MS 20x20 flex Silver

## M-STYLE COLLECTION

# MS 10x10 / 20x20

### PRODUCT CHARACTERISTICS

	SA
Surface material	PET
Base material	HIPS
Material thickness mm	1,2
Temperature resistance	until 50 °C
Wet room suitability	■ ■ □ □
Abrasion resistance	■ ■ □ □ □ □
Abrasion resistance Silver	■ ■ ■ ■ ■ □
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton
Smallest bending radius mm	35 MS 10x10 flex
	50 MS 20x20 flex
Weight/panel kg	~ 1,24

### EXTRA EQUIPMENT | ACCESSORIES

	SA
PVA pre-treatment	—
Special sizes	✓
Maximum length mm	3000
Maximum width mm	1000

### PROCESSING

	SA
Cutting, punching	✓
Drilling	✓
Sawing, milling	—
Laser cutting	✓
Hot bending	—
Thermoforming	—
PVA pressing	—
Digital printing	On request*
Screen printing	—

\* own printing test required, samples are gladly provided.

	SA
Further thicknesses	—
Magnetic from 3 sheets	✓
Cuttings	✓
Flammability ASTM E84	—
Flammability EN13501-1	—



# FABRIC COLLECTION



The FABRIC Collection - smart and contemporary - offers a diverse range of different textiles. The interplay of the haptic properties, structures and colours creates a unique multi-sensory experience.

CONTINUOUS PATTERN

**FL CUBE VELVET Bordeaux**

2600 x 1000 | NA 22709 | SA 22719

CONTINUOUS PATTERN

**FL CUBE VELVET Pearl**

2600 x 1000 | NA 22710 | SA 22720

Please consider the nap direction of the surface before further processing or product installation. If design panels are not installed in the same direction, there will be a visual color difference.



□  
FL CUBE VELVET Pearl

2600 x 1000



## FABRIC COLLECTION

## FL CUBE VELVET

## PRODUCT CHARACTERISTICS

	NA	SA
Surface material*	PET fibre	
Base material	HIPS	
Material thickness mm	1,7	1,9
Max. relief height mm	2,2	2,4
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 3 pcs/carton	✓ decor side outside, max. 3 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 3,6	~ 4,0

\* The product is delivered without a protective film.


## PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	—	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	—	
Screen printing	—	

## EXTRA EQUIPMENT | ACCESSORIES


	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	

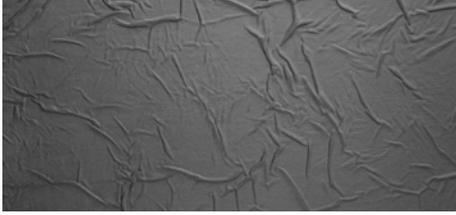

**FL CREPA VELVET Volcano**

2600 x 1000 | NA 22706 | SA 22717

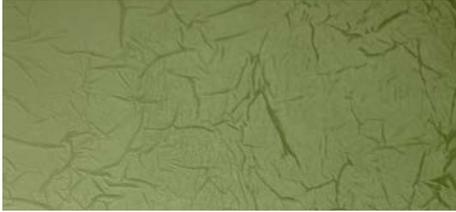

**FL CREPA VELVET Avocado**

2600 x 1000 | NA 22705 | SA 22715

Please consider the nap direction of the surface before further processing or product installation. If design panels are not installed in the same direction, there will be a visual color difference.



2600 x 1000



**FABRIC COLLECTION**

**FL CREPA VELVET**

**PRODUCT CHARACTERISTICS**

	NA	SA
Surface material*	PET fibre	
Base material	HIPS	
Material thickness mm	1,7	1,9
Max. relief height mm	2,2	2,4
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 3 pcs/carton	✓ decor side outside, max. 3 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 3,6	~ 4,0

\* The product is delivered without a protective film.

**PROCESSING**

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	—	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	—	
Screen printing	—	

**EXTRA EQUIPMENT | ACCESSORIES**

	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	

CONTINUOUS PATTERN

NEW

**FL GRAIN VELVET Volcano**

2600 x 1000 | NA 29254 | SA 29287

CONTINUOUS PATTERN

NEW

**FL GRAIN VELVET Mocha**

2600 x 1000 | NA 29256 | SA 29289

Please consider the nap direction of the surface before further processing or product installation. If design panels are not installed in the same direction, there will be a visual color difference.

□  
FL GRAIN VELVET Volcano



2600 x 1000



## FABRIC COLLECTION

## FL GRAIN VELVET

## PRODUCT CHARACTERISTICS

	NA	SA
Surface material*	PET fibre	
Base material	HIPS	
Material thickness mm	0,9	1,1
Max. relief height mm	1,0	1,2
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side outside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 1,9	~ 2,3

\* The product is delivered without a protective film.


## PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	—	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	—	
Screen printing	—	

## EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	

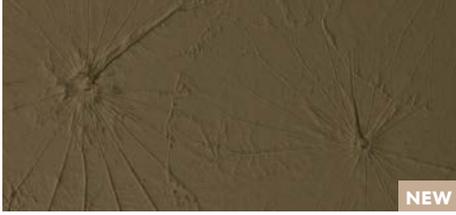

NEW

**FL LOTUS VELVET Mocha**  
2600 x 1000 | NA 31027 | SA 26534

Please consider the nap direction of the surface before further processing or product installation. If design panels are not installed in the same direction, there will be a visual color difference.

□  
FL LOTUS VELVET Mocha



2600 x 1000



## FABRIC COLLECTION

# FL LOTUS VELVET

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material*	PET fibre	
Base material	HIPS	
Material thickness mm	1,7	1,83
Max. relief height mm	2,2	2,33
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 3 pcs/carton	✓ decor side outside, max. 3 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 3,6	~ 4,2

\* The product is delivered without a protective film.

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	—	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	—	
Screen printing	—	

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	—
Cuttings	✓	—
Flammability ASTM E84	—	
Flammability EN13501-1	—	

**FL COMB VELVET Pearl**

2600 x 1000 | NA 22696 | SA 22712

**FL COMB VELVET Curry**

2600 x 1000 | NA 22695 | SA 22711

Please consider the nap direction of the surface before further processing or product installation. If design panels are not installed in the same direction, there will be a visual color difference.



FL COMB VELVET Pearl

2600 x 1000



## FABRIC COLLECTION

## FL COMB VELVET

## PRODUCT CHARACTERISTICS

	NA	SA
Surface material*	PET fibre	
Base material	HIPS	
Material thickness mm	1,7	1,9
Max. relief height mm	2,2	2,4
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 3 pcs/carton	✓ decor side outside, max. 3 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 3,6	~ 4,0

\* The product is delivered without a protective film.

## PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	—	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	—	
Screen printing	—	

## EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	✓ <sub>t</sub>	


	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	

**FL SQUARE 2 VELVET Mocha**2600 x 1000 | **NA** 22703 | **SA** 22713

Please consider the nap direction of the surface before further processing or product installation. If design panels are not installed in the same direction, there will be a visual color difference.



2600 x 1000

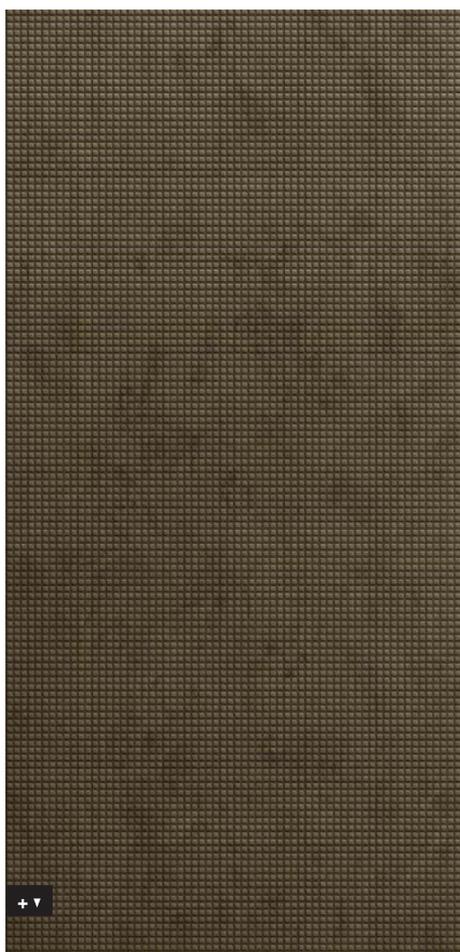

## FABRIC COLLECTION

**FL SQUARE 2 VELVET**

## PRODUCT CHARACTERISTICS

	NA	SA
Surface material*	PET fibre	
Base material	HIPS	
Material thickness mm	1,7	1,9
Max. relief height mm	2,2	2,4
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 3 pcs/carton	✓ decor side outside, max. 3 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 3,6	~ 4,0

\* The product is delivered without a protective film.


## PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	—	—
Laser cutting	✓	✓
Thermoforming	✓	—
PVA pressing	✓	—
Digital printing	—	
Screen printing	—	

## EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	

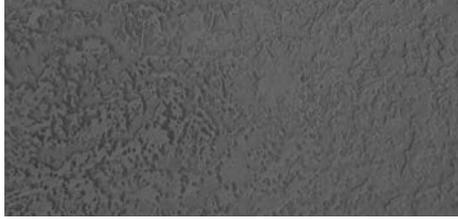


**FL LAVA VELVET Volcano**  
2600 x 1000 | NA 22707 | SA 22718

Please consider the nap direction of the surface before further processing or product installation. If design panels are not installed in the same direction, there will be a visual color difference.



2600 x 1000

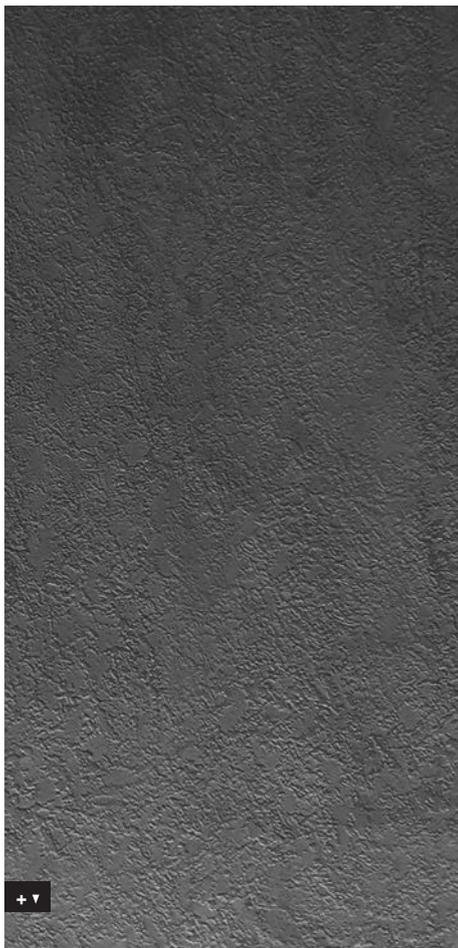

## FABRIC COLLECTION

# FL LAVA VELVET

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material*	PET fibre	
Base material	HIPS	
Material thickness mm	1,7	2,0
Max. relief height mm	2,2	2,5
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 3 pcs/carton	✓ decor side outside, max. 3 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 3,6	~ 4,2

\* The product is delivered without a protective film.

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	—	—
Laser cutting	✓	✓
Thermoforming	✓	—
PVA pressing	✓	—
Digital printing	—	
Screen printing	—	

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	



FL LAVA VELVET Volcano



# LEATHER COLLECTION



Animal welfare is very important to us - which is why all LEATHER Collection products are vegan. Starting with fine leather grains, through special decorative stitching techniques to exotic reptile decorations - you cannot tell the difference to real leather.



**LL ROMBO 40 Nero matt**  
2600 x 1000 | NA 15014 | SA 15029



**LL ROMBO 40 Creme matt**  
2600 x 1000 | NA 13848 | SA 13863



**LL ROMBO 40 Bianco matt**  
2600 x 1000 | NA 15025 | SA 15041



□ LL ROMBO 40  
Nero matt

2600 x 1000



## LEATHER COLLECTION

# LL ROMBO 40

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PU-leather	
Base material	HIPS, PE-foam	
Material thickness mm	3,8	4,1
Max. relief height mm	5	5,3
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 3 pcs/carton	✓ decor side outside, max. 3 pcs/carton
Smallest bending radius mm	300	
Weight/panel kg	~ 4,1	~ 4,7

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	—	—
Milling	—	—
Laser cutting	✓	✓
Hot bending	—	—
PVA pressing	—	—
Digital printing	—	
Screen printing	—	

\* own printing test required, samples are gladly provided.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	—	—
Special sizes	—	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	—	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	

**LL Charcoal Dark**2600 x 1000 | **NA** 19299 | **SA** 19302**LL London Clay**2600 x 1000 | **NA** 19014 | **SA** 19025**LL Charcoal Light**2600 x 1000 | **NA** 19298 | **SA** 19301**LL Dove Tale**2600 x 1000 | **NA** 19013 | **SA** 19024**LL Stony Ground**2600 x 1000 | **NA** 19012 | **SA** 19023**NEW****LL White**2600 x 1000 | **NA** 13451 | **SA** 13467

□ LL Dove Tale

**LEATHER COLLECTION****LEATHER-LINE****PRODUCT CHARACTERISTICS**

	<b>NA</b>	<b>SA</b>
<b>Surface material</b>	PU-leather	
<b>Base material</b>	HIPS	
<b>Material thickness mm</b>	1,9	2,1
<b>Material thickness mm LL White</b>	2,1	2,3
<b>Temperature resistance</b>	until 50 °C	
<b>Wet room suitability</b>	■■■■□	
<b>Rolled packable</b> Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 3 pcs/carton	✓ decor side outside, max. 3 pcs/carton
<b>Smallest bending radius mm</b>	150	
<b>Weight/panel kg</b>	~ 3,6	~ 4,0

**PROCESSING**

	<b>NA</b>	<b>SA</b>
<b>Cutting, punching</b>	✓	✓
<b>Drilling</b>	✓	✓
<b>Sawing</b>	✓	—
<b>Milling</b>	—	—
<b>Laser cutting</b>	✓	✓
<b>Hot bending</b>	✓	—
<b>PVA pressing</b>	✓	—
<b>Digital printing</b>	✓*	
<b>Screen printing</b>	✓*	

\* own printing test required, samples are gladly provided.

**EXTRA EQUIPMENT | ACCESSORIES**

	<b>NA</b>	<b>SA</b>
<b>PVA pre-treatment</b>	✓	—
<b>Special sizes</b>	On request	
<b>Further thicknesses</b>	✓	

	<b>NA</b>	<b>SA</b>
<b>Magnetic</b> from 3 sheets	✓	
<b>Cuttings</b>	✓	
<b>Flammability</b> ASTM E84	—	
<b>Flammability</b> EN13501-1	—	



### LL LEGUAN Nero

2600 x 1000 | NA 14778 | SA 14797



### LL LEGUAN Copper

2600 x 1000 | NA 12884 | SA 12894



### LL LEGUAN Gold


2600 x 1000 | NA 13480 | SA 13478



### LL LEGUAN Silver

2600 x 1000 | NA 12883 | SA 12893

2600 x 1000

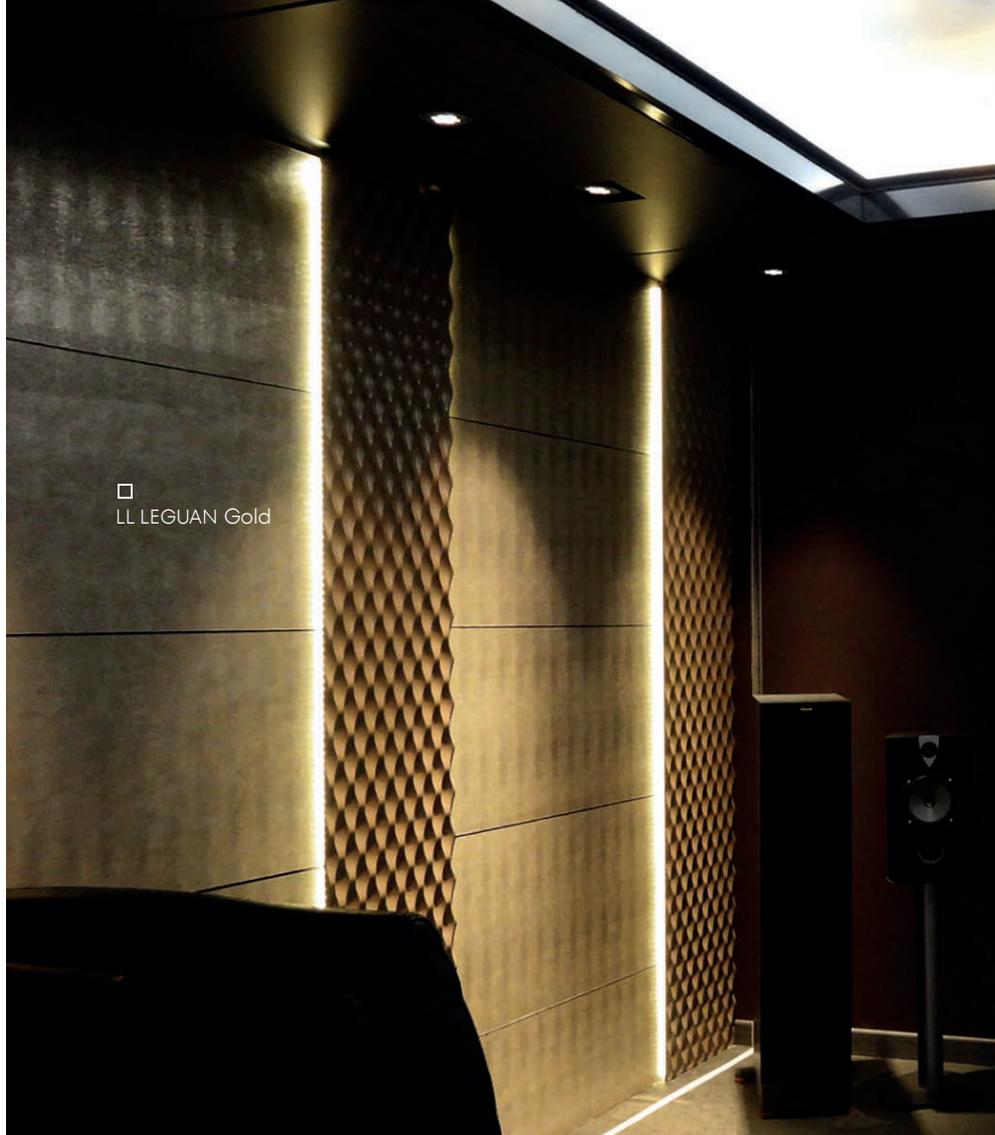

□ LL LEGUAN Gold

## LEATHER COLLECTION

# LL LEGUAN

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PU-leather	
Base material	HIPS	
Material thickness mm	1,5	1,7
Temperature resistance	until 50 °C	
Wet room suitability	■ ■ ■ □	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 3 pcs/carton	✓ decor side outside, max. 3 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 3,2	~ 3,6

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	—	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	—	
Screen printing	—	

\* own printing test required, samples are gladly provided.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	

## LL LEGUAN Bianco

2600 x 1000 | NA 15609 | SA 15610



2600 x 1000



## LEATHER COLLECTION

# LL LEGUAN

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PU-leather	
Base material	HIPS	
Material thickness mm	1,5	1,7
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 3 pcs/carton	✓ decor side outside, max. 3 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 3,2	~ 3,6

### PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	—	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	—	
Screen printing	—	

\* own printing test required, samples are gladly provided.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	On request	
Further thicknesses	✓	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	

CONTINUOUS PATTERN



NEW

**LL BRIDGE METALLIC USED Steel**

2600 x 1000 | NA 29271 | SA 29303

CONTINUOUS PATTERN



NEW

**LL BRIDGE METALLIC USED Sand**

2600 x 1000 | NA 29270 | SA 29302



LL BRIDGE METALLIC USED Sand

2600 x 1000



## LEATHER COLLECTION

**LL BRIDGE METALLIC USED**

## PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PU-leather	
Base material	HIPS	
Material thickness mm	1,1	1,3
Max. relief height mm	1,3	1,5
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side outside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,0	~ 2,4

## PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	—	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	—	
Screen printing	—	


## EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	

**LL BRIDGE White**

2600 x 1000 | NA 29273 | SA 29305

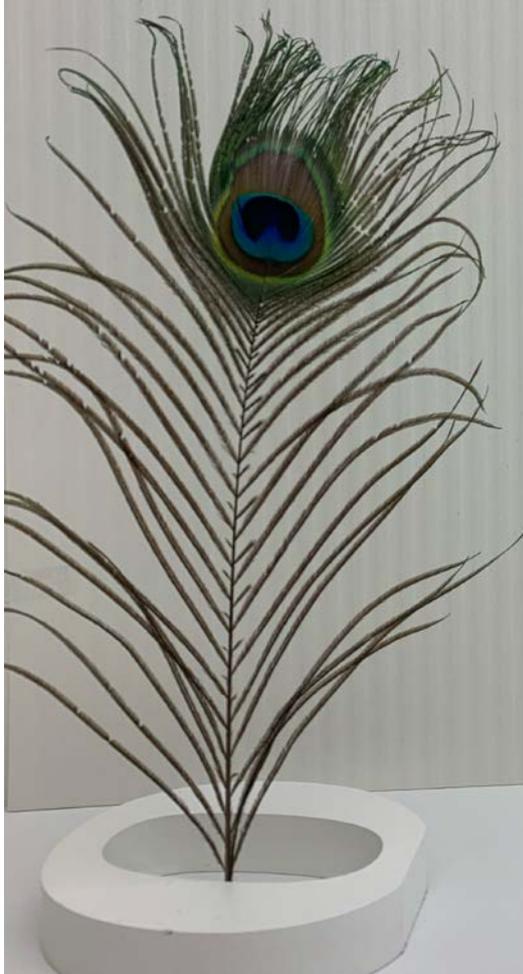

□ LL BRIDGE White

2600 x 1000

## LEATHER COLLECTION

**LL BRIDGE**

## PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PU-leather	
Base material	HIPS	
Material thickness mm	1,3	1,5
Max. relief height mm	1,5	1,7
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side outside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,3	~ 2,7

## PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	—	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	—	
Screen printing	—	

## EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	



NEW


**LL GRAIN METALLIC USED Sand**

2600 x 1000 | NA 29253 | SA 29286



LL GRAIN METALLIC USED Sand

2600 x 1000

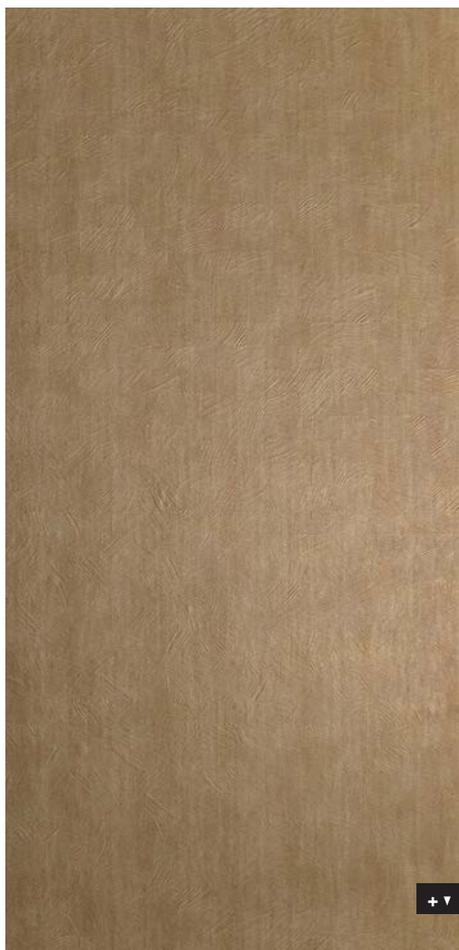

## LEATHER COLLECTION

**LL GRAIN METALLIC USED**

## PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PU-leather	
Base material	HIPS	
Material thickness mm	1,1	1,3
Max. relief height mm	1,2	1,4
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side outside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,0	~ 2,4

## PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	—	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	—	
Screen printing	—	


## EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	

**LL TARGET METALLIC USED Sand**

2600 x 1000 | NA 29265 | SA 29298

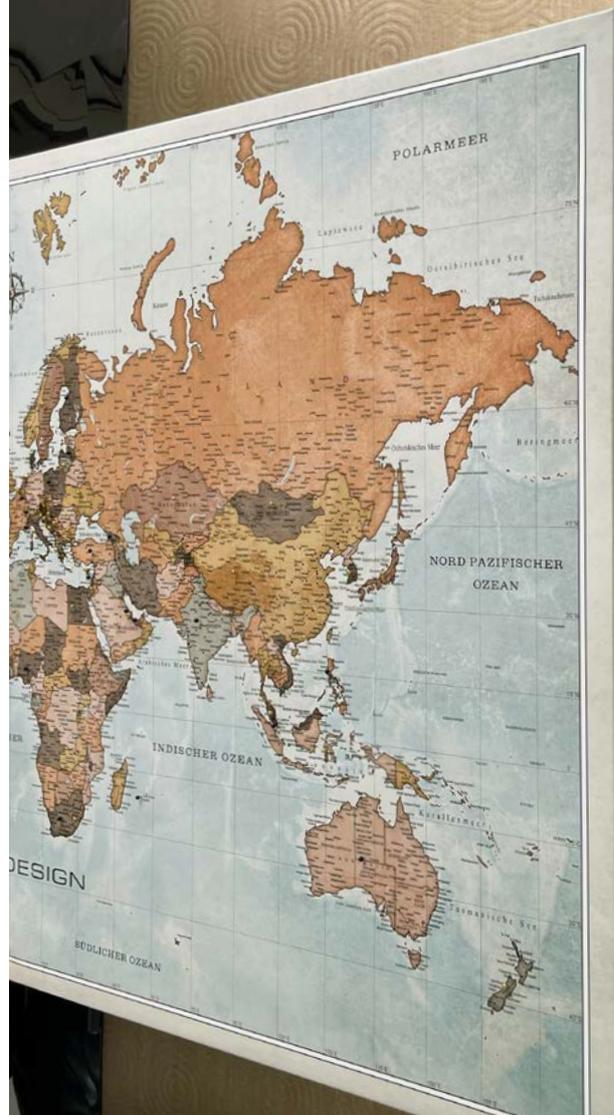

□ LL TARGET METALLIC  
USED Sand

2600 x 1000

**LEATHER COLLECTION****LL TRAGET METALLIC USE****PRODUCT CHARACTERISTICS**

	NA	SA
Surface material	PU-leather	
Base material	HIPS	
Material thickness mm	1,1	1,3
Max. relief height mm	1,2	1,4
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side outside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,0	~ 2,4

**PROCESSING**

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	—	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	—	
Screen printing	—	

**EXTRA EQUIPMENT | ACCESSORIES**

	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	

NEW

**LL WAVE 12 METALLIC USED Sand**

2600 x 1000 | NA 29199 | SA 29208

 LL WAVE 12 METALLIC USED Sand


2600 x 1000

## LEATHER COLLECTION

**LL WAVE 12 METALLIC USED**

## PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PU-leather	
Base material	HIPS	
Material thickness mm	1,6	1,9
Max. relief height mm	2,5	2,8
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 3 pcs/carton	✓ decor side outside, max. 3 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 3,4	~ 4,0

## PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	—	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	—	
Screen printing	—	

## EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	

CONTINUOUS PATTERN

NEW

**LL LANE METALLIC USED Titan**

2600 x 1000 | NA 29276 | SA 29308

CONTINUOUS PATTERN

NEW

**LL LANE METALLIC USED Sand**

2600 x 1000 | NA 29274 | SA 29306



LL LANE METALLIC USED Titan



2600 x 1000



## LEATHER COLLECTION

**LL LANE METALLIC USED**

## PRODUCT CHARACTERISTICS

	NA	SA
Surface material	PU-leather	
Base material	HIPS	
Material thickness mm	1,1	1,3
Max. relief height mm	1,3	1,5
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 6 pcs/carton	✓ decor side outside, max. 6 pcs/carton
Smallest bending radius mm	150	
Weight/panel kg	~ 2,0	~ 2,4


## PROCESSING

	NA	SA
Cutting, punching	✓	✓
Drilling	✓	✓
Sawing	✓	—
Milling	—	—
Laser cutting	✓	✓
Hot bending	✓	—
PVA pressing	✓	—
Digital printing	—	
Screen printing	—	

## EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	✓	—
Special sizes	—	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	

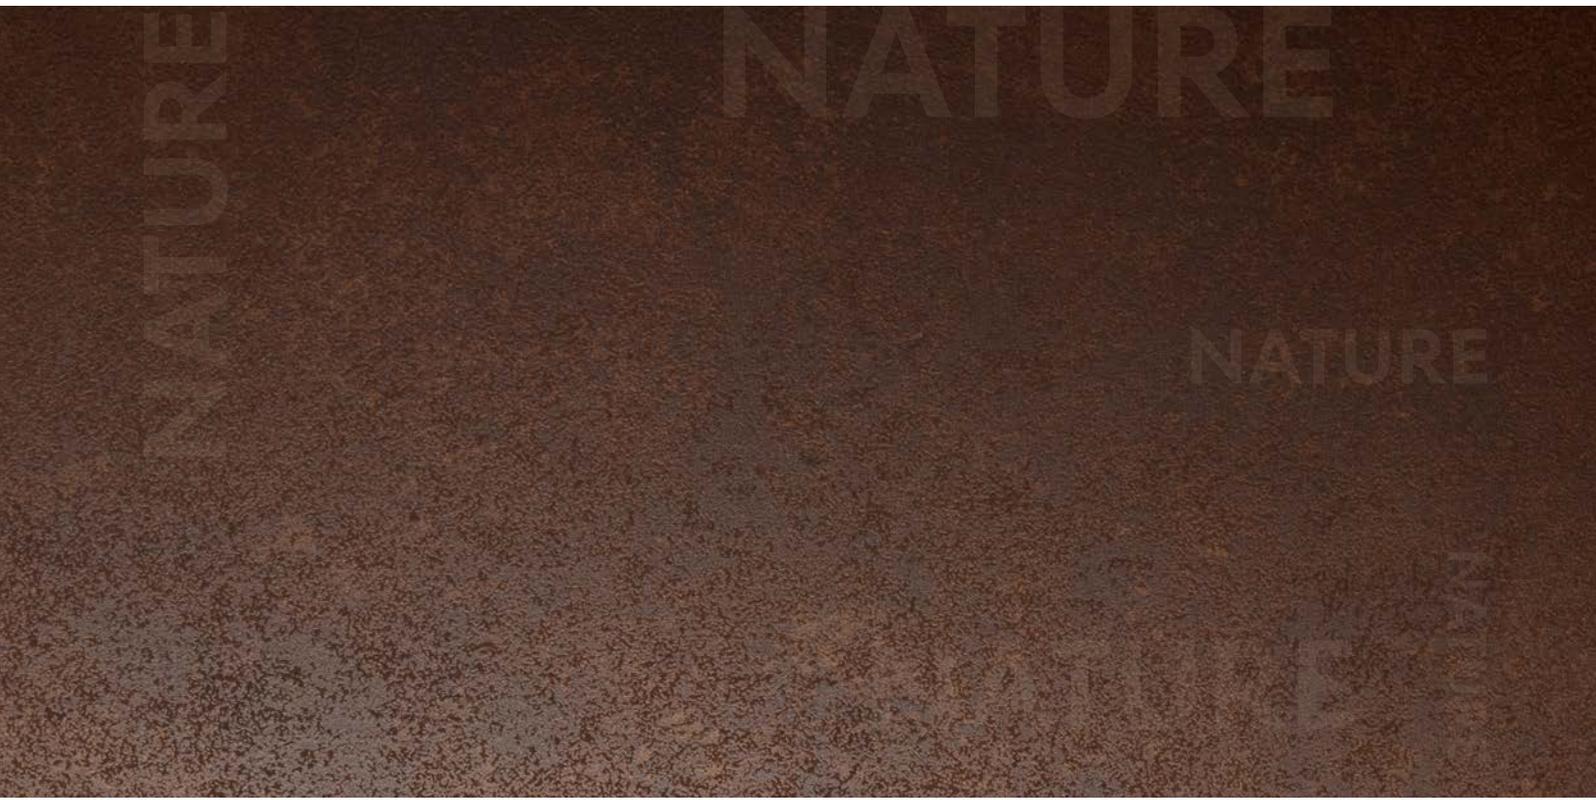

# NATURE COLLECTION



With the sustainable and particularly light decorative panels of the NATURE Collection large wall surfaces can be designed quickly and easily. The FSC®-certified and self-adhesive products can be glued to all substrates without expansion joints.



**WL Carbonized Wood Nature**  
2600 x 1000 | SA 25549



## NATURE COLLECTION

# WL Carbonized Wood Nature

2600 x 1000



### PRODUCT CHARACTERISTICS

	SA
Surface material*	impregnated paper
Base material	Natural fibre
Material thickness mm	1,4
Temperature resistance	until 50 °C
Wet room suitability	■□□□
Abrasion resistance	■ ■ ■ □ □ □ □
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 3 pcs/carton
Smallest bending radius mm	300
Weight/panel kg	~ 2,4

\* The product is delivered without a protective film.


### PROCESSING

	SA
Cutting, punching	✓
Drilling	✓
Sawing (supported by a panel)	✓
Milling	—
Laser cutting	—
Hot bending	—
Thermoforming	—
PVA pressing	—
Digital printing	—
Screen printing	On request

### EXTRA EQUIPMENT | ACCESSORIES

	SA
PVA pre-treatment	—
Special sizes	On request
Further thicknesses	—

	SA
Magnetic from 3 sheets	✓
Cuttings	✓
Flammability ASTM E84	—
Flammability EN13501-1	—

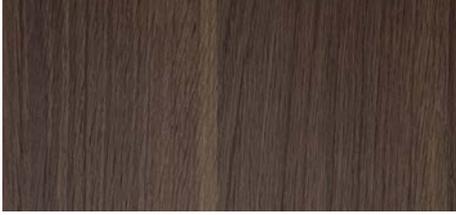

**WL Nutwood Nature**  
2600 x 1000 | SA 25547



## NATURE COLLECTION

# WL Nutwood Nature

2600 x 1000



### PRODUCT CHARACTERISTICS

	SA
Surface material*	impregnated paper
Base material	Natural fibre
Material thickness mm	1,4
Temperature resistance	until 50 °C
Wet room suitability	■□□□□
Abrasion resistance	■ ■ ■ □ □ □ □
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 3 pcs/carton
Smallest bending radius mm	300
Weight/panel kg	~ 2,5

\* The product is delivered without a protective film.

### PROCESSING

	SA
Cutting, punching	✓
Drilling	✓
Sawing (supported by a panel)	✓
Milling	—
Laser cutting	—
Hot bending	—
Thermoforming	—
PVA pressing	—
Digital printing	—
Screen printing	On request

### EXTRA EQUIPMENT | ACCESSORIES

	SA
PVA pre-treatment	—
Special sizes	On request
Further thicknesses	—

	SA
Magnetic from 3 sheets	✓
Cuttings	✓
Flammability ASTM E84	—
Flammability EN13501-1	—



**WL Nutwood Country Nature**  
2600 x 1000 | SA 25546



□ WL Nutwood Country Nature

## NATURE COLLECTION

# WL Nutwood Country Nature

2600 x 1000



### PRODUCT CHARACTERISTICS

	SA
Surface material*	impregnated paper
Base material	Natural fibre
Material thickness mm	1,4
Temperature resistance	until 50 °C
Wet room suitability	■□□□
Abrasion resistance	■ ■ ■ □ □ □ □
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 3 pcs/carton
Smallest bending radius mm	300
Weight/panel kg	~ 2,4

\* The product is delivered without a protective film.

### PROCESSING

	SA
Cutting, punching	✓
Drilling	✓
Sawing (supported by a panel)	✓
Milling	—
Laser cutting	—
Hot bending	—
Thermoforming	—
PVA pressing	—
Digital printing	—
Screen printing	On request


### EXTRA EQUIPMENT | ACCESSORIES

	SA
PVA pre-treatment	—
Special sizes	On request
Further thicknesses	—

	SA
Magnetic from 3 sheets	✓
Cuttings	✓
Flammability ASTM E84	—
Flammability EN13501-1	—



**WL Sessile OAK Nature**  
2600 x 1000 | SA 25511

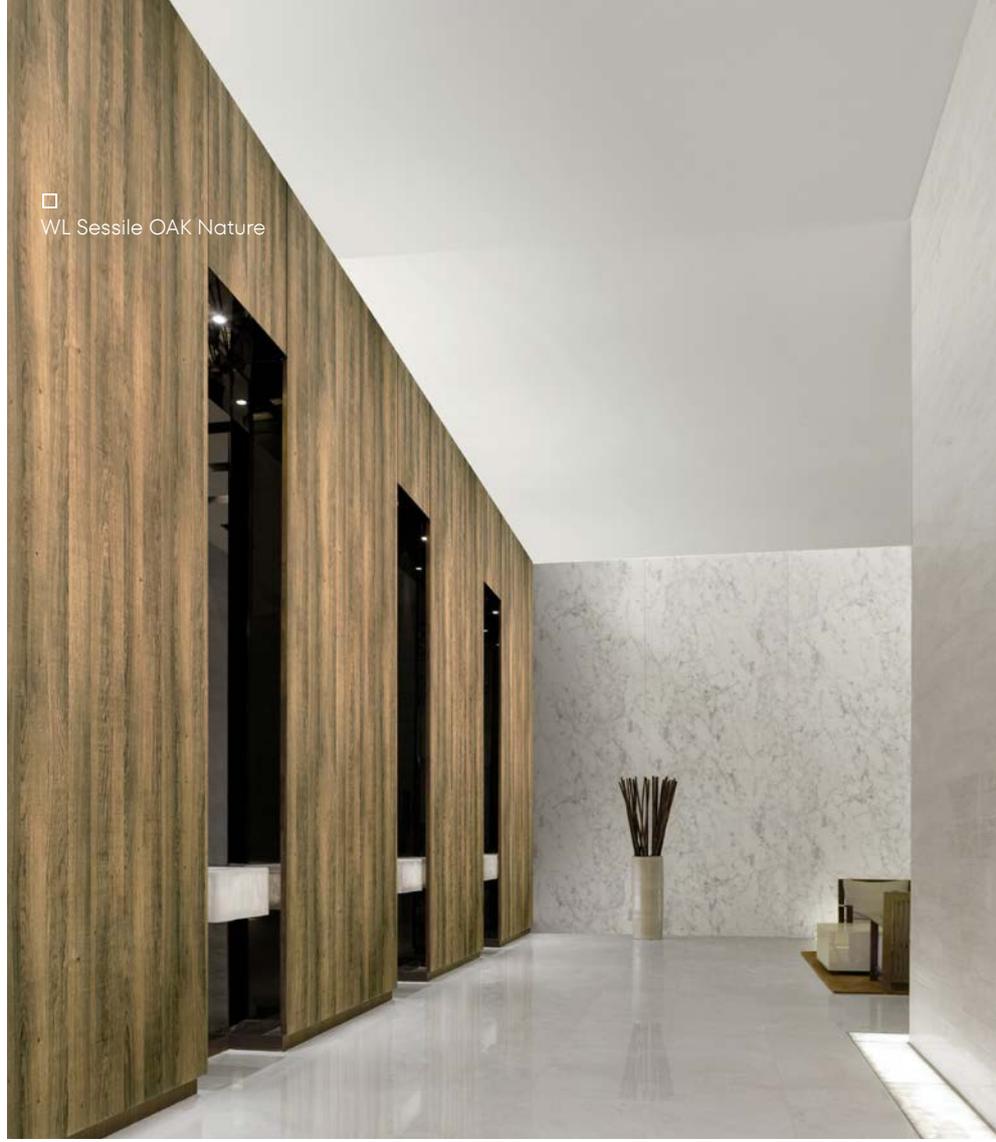

□ WL Sessile OAK Nature

2600 x 1000



## NATURE COLLECTION

# WL Sessile OAK Nature

### PRODUCT CHARACTERISTICS

	SA
Surface material*	impregnated paper
Base material	Natural fibre
Material thickness mm	1,4
Temperature resistance	until 50 °C
Wet room suitability	■□□□□
Abrasion resistance	■ ■ ■ □ □ □ □
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 3 pcs/carton
Smallest bending radius mm	300
Weight/panel kg	~ 2,4

\* The product is delivered without a protective film.

### PROCESSING

	SA
Cutting, punching	✓
Drilling	✓
Sawing (supported by a panel)	✓
Milling	—
Laser cutting	—
Hot bending	—
Thermoforming	—
PVA pressing	—
Digital printing	—
Screen printing	On request

### EXTRA EQUIPMENT | ACCESSORIES

	SA
PVA pre-treatment	—
Special sizes	On request
Further thicknesses	—

	SA
Magnetic from 3 sheets	✓
Cuttings	✓
Flammability ASTM E84	—
Flammability EN13501-1	—



**WL Sunwood Nature**  
2600 x 1000 | SA 25896



□ WL Sunwood Nature

## NATURE COLLECTION

# WL Sunwood Nature

2600 x 1000



### PRODUCT CHARACTERISTICS

	SA
Surface material*	impregnated paper
Base material	Natural fibre
Material thickness mm	1,4
Temperature resistance	until 50 °C
Wet room suitability	■□□□
Abrasion resistance	■ ■ ■ ■ □ □ □
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 3 pcs/carton
Smallest bending radius mm	300
Weight/panel kg	~ 2,4

\* The product is delivered without a protective film.

### PROCESSING

	SA
Cutting, punching	✓
Drilling	✓
Sawing (supported by a panel)	✓
Milling	—
Laser cutting	—
Hot bending	—
Thermoforming	—
PVA pressing	—
Digital printing	On request
Screen printing	✓*

\* own printing test required, samples are gladly provided.

### EXTRA EQUIPMENT | ACCESSORIES

	SA
PVA pre-treatment	—
Special sizes	On request
Further thicknesses	—

	SA
Magnetic from 3 sheets	✓
Cuttings	✓
Flammability ASTM E84	—
Flammability EN13501-1	—



**WL Willow OAK Nature**  
2600 x 1000 | SA 25895



□ WL Willow OAK Nature

## NATURE COLLECTION

# WL Willow OAK Nature

2600 x 1000



### PRODUCT CHARACTERISTICS

	SA
Surface material*	impregnated paper
Base material	Natural fibre
Material thickness mm	1,4
Temperature resistance	until 50 °C
Wet room suitability	■□□□
Abrasion resistance	■■■■□□
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 3 pcs/carton
Smallest bending radius mm	300
Weight/panel kg	~ 2,4

\* The product is delivered without a protective film.

### PROCESSING

	SA
Cutting, punching	✓
Drilling	✓
Sawing (supported by a panel)	✓
Milling	—
Laser cutting	—
Hot bending	—
Thermoforming	—
PVA pressing	—
Digital printing	On request
Screen printing	✓*

\* own printing test required, samples are gladly provided.

### EXTRA EQUIPMENT | ACCESSORIES

	SA
PVA pre-treatment	—
Special sizes	On request
Further thicknesses	—

	SA
Magnetic from 3 sheets	✓
Cuttings	✓
Flammability ASTM E84	—
Flammability EN13501-1	—



**WL OAK TREE Light Nature**  
2600 x 1000 | SA 25544



□ WL OAK TREE Light Nature

## NATURE COLLECTION

# WL OAK TREE Light Nature

2600 x 1000



### PRODUCT CHARACTERISTICS

	SA
Surface material*	impregnated paper
Base material	Natural fibre
Material thickness mm	1,4
Temperature resistance	until 50 °C
Wet room suitability	■□□□
Abrasion resistance	■ ■ ■ ■ □ □ □
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 3 pcs/carton
Smallest bending radius mm	300
Weight/panel kg	~ 2,4

\* The product is delivered without a protective film.

### PROCESSING

	SA
Cutting, punching	✓
Drilling	✓
Sawing (supported by a panel)	✓
Milling	—
Laser cutting	—
Hot bending	—
Thermoforming	—
PVA pressing	—
Digital printing	On request
Screen printing	On request

### EXTRA EQUIPMENT | ACCESSORIES

	SA
PVA pre-treatment	—
Special sizes	On request
Further thicknesses	—

	SA
Magnetic from 3 sheets	✓
Cuttings	✓
Flammability ASTM E84	—
Flammability EN13501-1	—



**DM CEMENT Dark Nature**  
2600 x 1000 | SA 25515



□ DM CEMENT Dark Nature

## NATURE COLLECTION

# DM CEMENT Dark Nature

2600 x 1000



### PRODUCT CHARACTERISTICS

	SA
Surface material*	impregnated paper
Base material	Natural fibre
Material thickness mm	1,4
Temperature resistance	until 50 °C
Wet room suitability	■□□□□
Abrasion resistance	■ ■ ■ □ □ □ □
Rolled packable Corton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 3 pcs/carton
Smallest bending radius mm	300
Weight/panel kg	~ 2,4

\* The product is delivered without a protective film.

### EXTRA EQUIPMENT | ACCESSORIES

	SA
PVA pre-treatment	—
Special sizes	On request
Further thicknesses	—

### PROCESSING

	SA
Cutting, punching	✓
Drilling	✓
Sawing (supported by a panel)	✓
Milling	—
Laser cutting	—
Hot bending	—
Thermoforming	—
PVA pressing	—
Digital printing	On request
Screen printing	On request

	SA
Magnetic from 3 sheets	✓
Cuttings	✓
Flammability ASTM E84	—
Flammability EN13501-1	—



**DM Corten Nature**  
2600 x 1000 | SA 25548



□ DM Corten Nature

## NATURE COLLECTION

# DM Corten Nature

2600 x 1000



### PRODUCT CHARACTERISTICS

	SA
Surface material*	impregnated paper
Base material	Natural fibre
Material thickness mm	1,4
Temperature resistance	until 50 °C
Wet room suitability	■□□□
Abrasion resistance	■ ■ ■ □ □ □ □
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 3 pcs/carton
Smallest bending radius mm	300
Weight/panel kg	~ 2,4

\* The product is delivered without a protective film.

### PROCESSING

	SA
Cutting, punching	✓
Drilling	✓
Sawing (supported by a panel)	✓
Milling	—
Laser cutting	—
Hot bending	—
Thermoforming	—
PVA pressing	—
Digital printing	On request
Screen printing	On request

### EXTRA EQUIPMENT | ACCESSORIES

	SA
PVA pre-treatment	—
Special sizes	On request
Further thicknesses	—

	SA
Magnetic from 3 sheets	✓
Cuttings	✓
Flammability ASTM E84	—
Flammability EN13501-1	—



**DM LIMESTONE Grey Nature**  
2600 x 1000 | SA 25894



DM LIMESTONE Grey Nature

## NATURE COLLECTION

# DM LIMESTONE Grey Nature

2600 x 1000



### PRODUCT CHARACTERISTICS

	SA
Surface material*	impregnated paper
Base material	Natural fibre
Material thickness mm	1,4
Temperature resistance	until 50 °C
Wet room suitability	■□□□
Abrasion resistance	■■■■□□
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 3 pcs/carton
Smallest bending radius mm	300
Weight/panel kg	~ 2,4

\* The product is delivered without a protective film.

### PROCESSING

	SA
Cutting, punching	✓
Drilling	✓
Sawing (supported by a panel)	✓
Milling	—
Laser cutting	—
Hot bending	—
Thermoforming	—
PVA pressing	—
Digital printing	✓*
Screen printing	✓*

\* own printing test required, samples are gladly provided.

### EXTRA EQUIPMENT | ACCESSORIES

	SA
PVA pre-treatment	—
Special sizes	On request
Further thicknesses	—

	SA
Magnetic from 3 sheets	✓
Cuttings	✓
Flammability ASTM E84	—
Flammability EN13501-1	—



**DM CEMENT Light Nature**  
2600 x 1000 | SA 25516




□  
DM CEMENT Light Nature

## NATURE COLLECTION

# DM CEMENT Light Nature

2600 x 1000

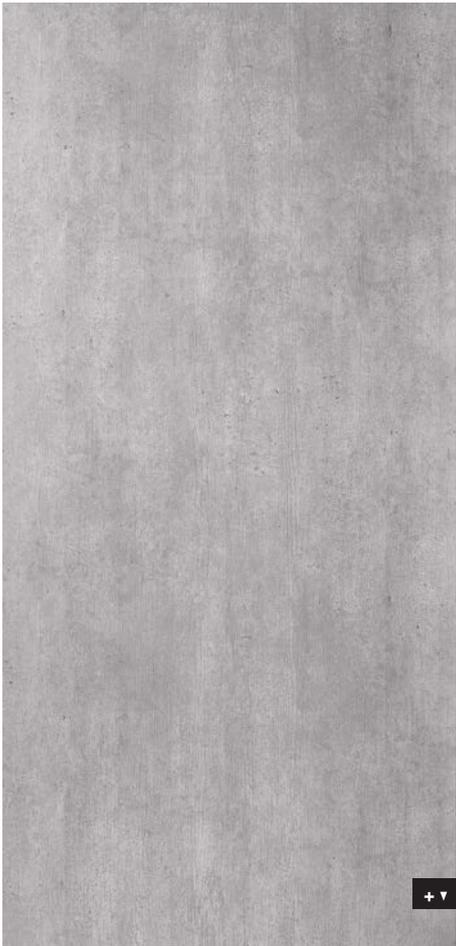

### PRODUCT CHARACTERISTICS

	SA
Surface material*	impregnated paper
Base material	Natural fibre
Material thickness mm	1,4
Temperature resistance	until 50 °C
Wet room suitability	■□□□
Abrasion resistance	■□□□□□
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 3 pcs/carton
Smallest bending radius mm	300
Weight/panel kg	~ 2,4

\* The product is delivered without a protective film.

### PROCESSING

	SA
Cutting, punching	✓
Drilling	✓
Sawing (supported by a panel)	✓
Milling	—
Laser cutting	—
Hot bending	—
Thermoforming	—
PVA pressing	—
Digital printing	On request
Screen printing	On request

### EXTRA EQUIPMENT | ACCESSORIES

	SA
PVA pre-treatment	—
Special sizes	On request
Further thicknesses	—

	SA
Magnetic from 3 sheets	✓
Cuttings	✓
Flammability ASTM E84	—
Flammability EN13501-1	—



**DM MARBLE White Nature**  
2600 x 1000 | SA 25545



□ DM MARBLE White Nature

## NATURE COLLECTION

# DM MARBLE White Nature

2600 x 1000



### PRODUCT CHARACTERISTICS

	SA
Surface material*	impregnated paper
Base material	Natural fibre
Material thickness mm	1,4
Temperature resistance	until 50 °C
Wet room suitability	■□□□□
Abrasion resistance	■ ■ ■ ■ □ □ □
Rolled packable Carton 480 x 480 mm, lay rolled goods flat upon receipt	✓ decor side outside, max. 3 pcs/carton
Smallest bending radius mm	300
Weight/panel kg	~ 2,4

\* The product is delivered without a protective film.

### PROCESSING


	SA
Cutting, punching	✓
Drilling	✓
Sawing (supported by a panel)	✓
Milling	—
Laser cutting	—
Hot bending	—
Thermoforming	—
PVA pressing	—
Digital printing	On request
Screen printing	✓*

\* own printing test required, samples are gladly provided.

### EXTRA EQUIPMENT | ACCESSORIES

	SA
PVA pre-treatment	—
Special sizes	On request
Further thicknesses	—

	SA
Magnetic from 3 sheets	✓
Cuttings	✓
Flammability ASTM E84	—
Flammability EN13501-1	—

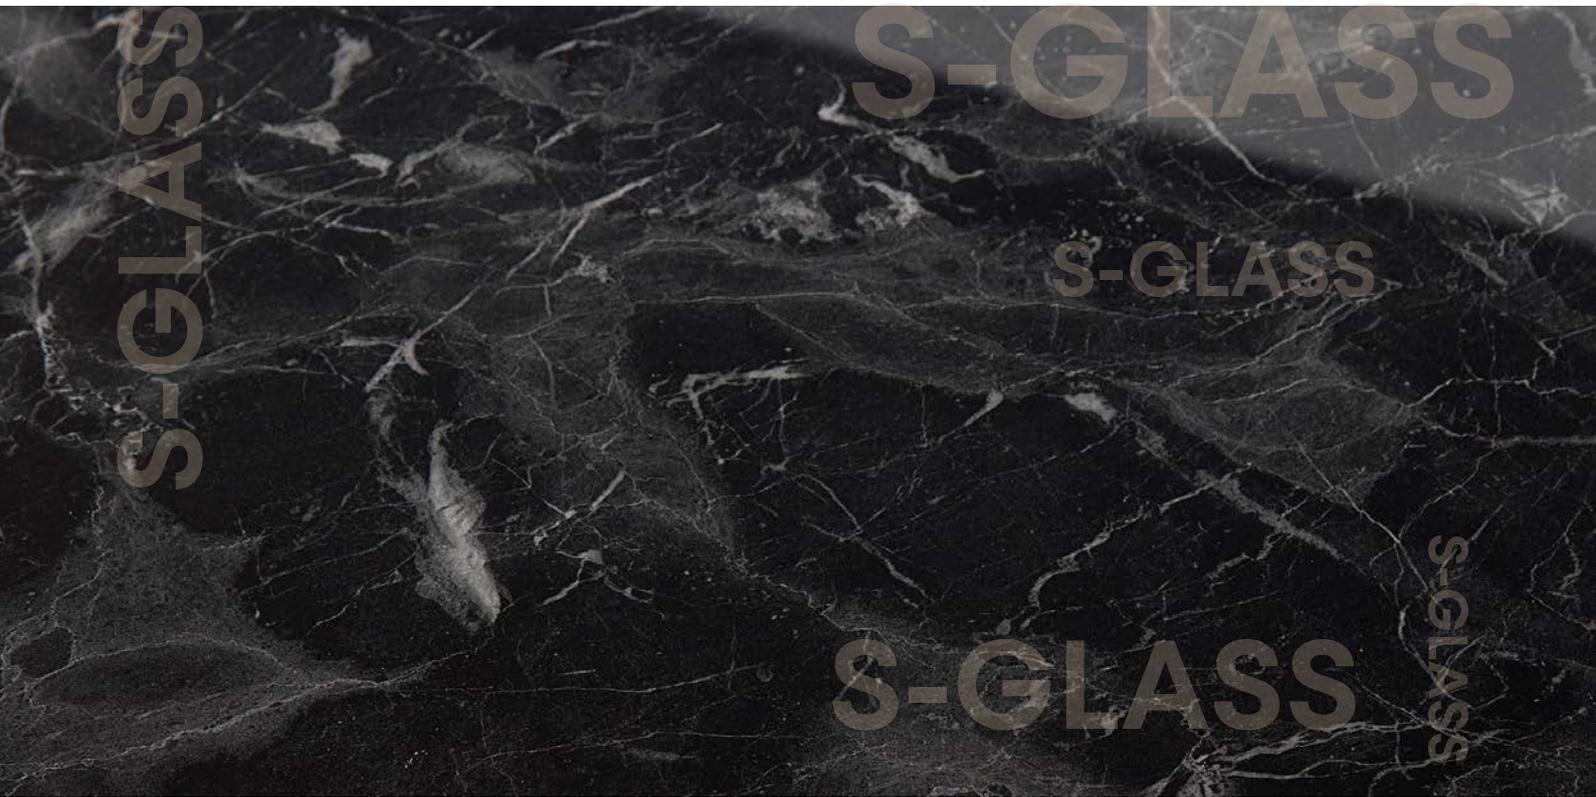

S-GLASS

S-GLASS

S-GLASS

S-GLASS

S-GLASS


# S-GLASS COLLECTION




Scratch-resistant high-gloss surfaces combined with extraordinary designs create the basis for long-lasting design objects. The real glass effect creates a revolutionary depth effect and thanks to its material properties, S-GLASS scores with low weight and a highly reduced risk of breakage.



**SG MARBLE Black AR+**  
2600 x 1000 | NA 19330 | SA 19341

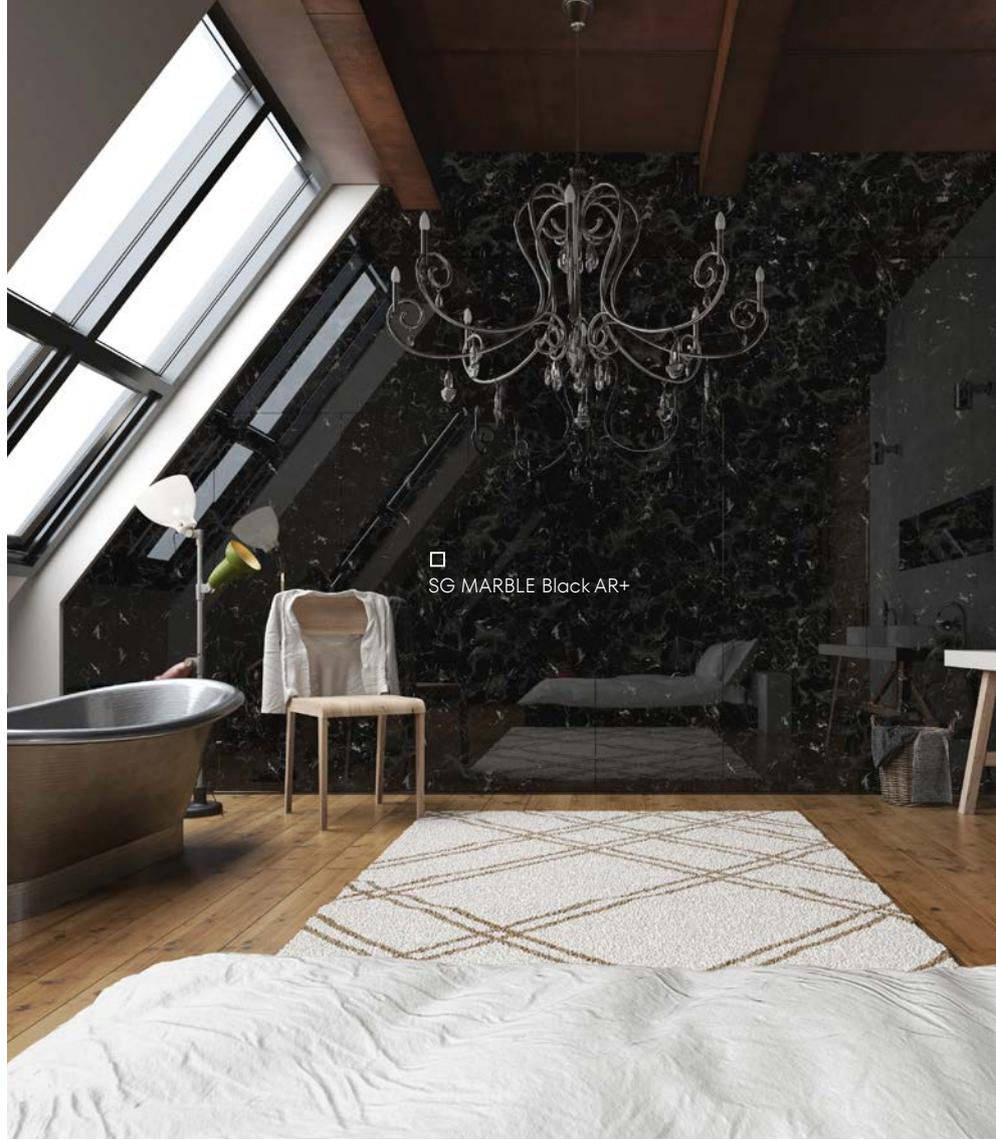

2600 x 1000

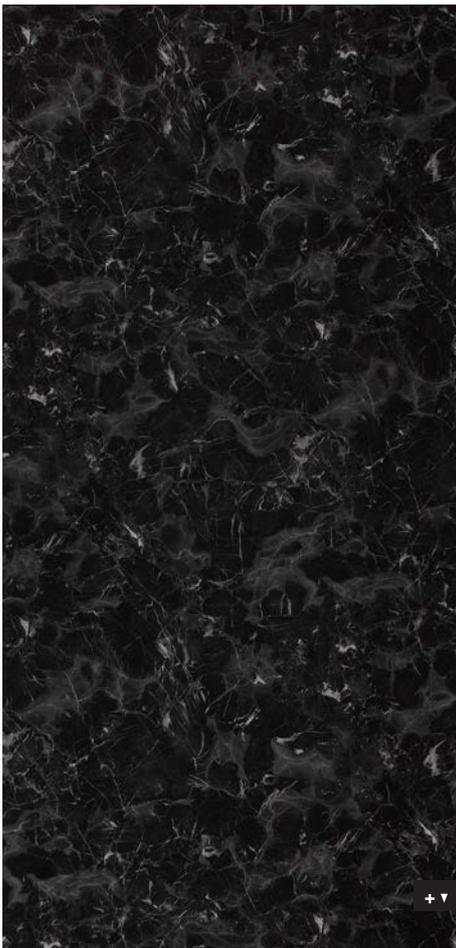

## S-GLASS COLLECTION

scratch-resistant

# SG MARBLE Black AR+

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material = Base material	PMMA AR+	
Back side material	Paper	
Material thickness mm	2,1	2,3
Temperature resistance	until 50 °C	
Wet room suitability	■■■■■□	
Abrasion resistance	■■■■■■■■	
Rolled packable	—	—
Smallest bending radius mm	1000	
Weight/panel kg	~ 7	~ 7,4

### PROCESSING

	NA	SA
Cutting, punching	—	—
Drilling	✓	✓
Sawing (supported by a panel)	✓	✓
Milling (supported by a panel)	✓	✓
Laser cutting	✓	✓
Hot bending	—	—
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	✓*	

\* own printing test required, samples are gladly provided.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	—	—
Special sizes	On request	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	



**SG MARBLE Grey AR+**

2600 x 1000 | **NA** 19333 | **SA** 19344



□ SG MARBLE Grey AR+

2600 x 1000



**S-GLASS COLLECTION**

scratch-resistant

**SG MARBLE Grey AR+**

**PRODUCT CHARACTERISTICS**

	NA	SA
Surface material = Base material	PMMA AR+	
Back side material	Paper	
Material thickness mm	2,1	2,3
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■■■■	
Rolled packable	—	—
Smallest bending radius mm	1000	
Weight/panel kg	~ 7	~ 7,4

**PROCESSING**

	NA	SA
Cutting, punching	—	—
Drilling	✓	✓
Sawing (supported by a panel)	✓	✓
Milling (supported by a panel)	✓	✓
Laser cutting	✓	✓
Hot bending	—	—
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	✓*	

\* own printing test required, samples are gladly provided.

**EXTRA EQUIPMENT | ACCESSORIES**

	NA	SA
PVA pre-treatment	—	—
Special sizes	On request	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	




**SG MARBLE Emperador AR+**  
2600 x 1000 | NA 19332 | SA 19343



□ SG MARBLE Emperador AR+

Photo: © Lassi Saijets Designstudio Visionary Design Partners Helsinki, Oy, Suite Finland

2600 x 1000

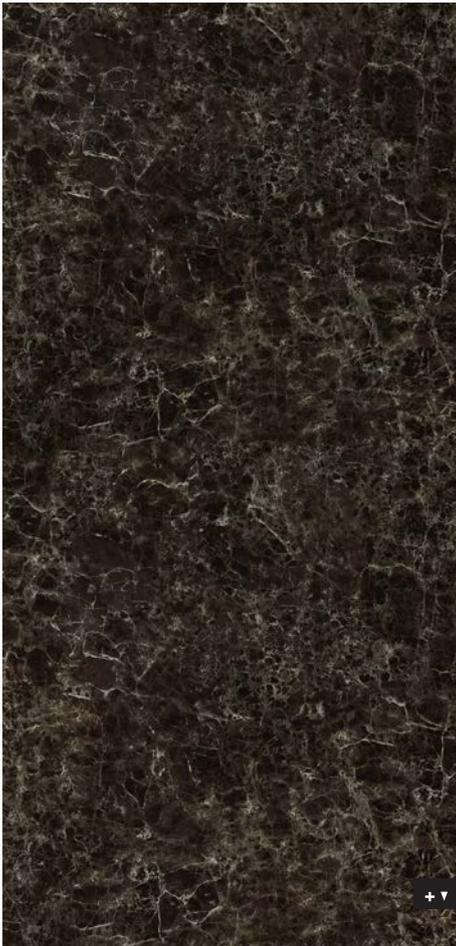

## S-GLASS COLLECTION

scratch-resistant

# SG MARBLE Emperador AR+

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material = Base material	PMMA AR+	
Back side material	Paper	
Material thickness mm	2,1	2,3
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■■■■	
Rolled packable	—	—
Smallest bending radius mm	1000	
Weight/panel kg	~ 7	~ 7,4

### PROCESSING

	NA	SA
Cutting, punching	—	—
Drilling	✓	✓
Sawing (supported by a panel)	✓	✓
Milling (supported by a panel)	✓	✓
Laser cutting	✓	✓
Hot bending	—	—
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	✓*	

\* own printing test required, samples are gladly provided.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	—	—
Special sizes	On request	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	



**SG MARBLE Brown AR+**  
2600 x 1000 | NA 19331 | SA 19342



□ SG MARBLE Brown AR+

2600 x 1000



## S-GLASS COLLECTION

scratch-resistant

# SG MARBLE Brown AR+

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material = Base material	PMMA AR+	
Back side material	Paper	
Material thickness mm	2,1	2,3
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■■■■	
Rolled packable	—	—
Smallest bending radius mm	1000	
Weight/panel kg	~ 7	~ 7,4

### PROCESSING

	NA	SA
Cutting, punching	—	—
Drilling	✓	✓
Sawing (supported by a panel)	✓	✓
Milling (supported by a panel)	✓	✓
Laser cutting	✓	✓
Hot bending	—	—
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	✓*	

\* own printing test required, samples are gladly provided.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	—	—
Special sizes	On request	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	



**SG MARBLE Alpine AR+**  
2600 x 1000 | NA 19329 | SA 19340



□ SG MARBLE Alpine AR+

2600 x 1000



## S-GLASS COLLECTION

scratch-resistant

# SG MARBLE Alpine AR+

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material = Base material	PMMA AR+	
Back side material	Paper	
Material thickness mm	2,1	2,3
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■■■■	
Rolled packable	—	—
Smallest bending radius mm	1000	
Weight/panel kg	~ 7	~ 7,4

### PROCESSING

	NA	SA
Cutting, punching	—	—
Drilling	✓	✓
Sawing (supported by a panel)	✓	✓
Milling (supported by a panel)	✓	✓
Laser cutting	✓	✓
Hot bending	—	—
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	✓*	

\* own printing test required, samples are gladly provided.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	—	—
Special sizes	On request	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	



**SG MARBLE White AR+**  
2600 x 1000 | NA 19334 | SA 19345



□ SG MARBLE White AR+

2600 x 1000



## S-GLASS COLLECTION

scratch-resistant

# SG MARBLE White AR+

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material = Base material	PMMA AR+	
Back side material	Paper	
Material thickness mm	2,1	2,3
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■■■■	
Rolled packable	—	—
Smallest bending radius mm	1000	
Weight/panel kg	~ 7	~ 7,4

### PROCESSING


	NA	SA
Cutting, punching	—	—
Drilling	✓	✓
Sawing (supported by a panel)	✓	✓
Milling (supported by a panel)	✓	✓
Laser cutting	✓	✓
Hot bending	—	—
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	✓*	

\* own printing test required, samples are gladly provided.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	—	—
Special sizes	On request	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	

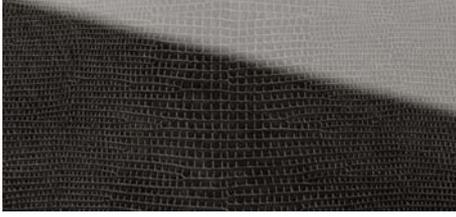

**SG LEGUAN Nero AR+**  
2600 x 1000 | NA 18089 | SA 18095



**SG LEGUAN Copper AR+**  
2600 x 1000 | NA 16976 | SA 16981



**SG LEGUAN Gold AR+**  
2600 x 1000 | NA 16977 | SA 16982



**SG LEGUAN Silver AR+**  
2600 x 1000 | NA 16975 | SA 16979



□ SG LEGUAN  
Copper AR+

## S-GLASS COLLECTION

scratch-resistant

# SG LEGUAN AR+

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material = Base material	PMMA AR+	
Back side material	PU-leather	
Material thickness mm	2,6	2,8
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■■■■	
Rolled packable	—	—
Smallest bending radius mm	1000	
Weight/panel kg	~7,2	~7,6

### PROCESSING

	NA	SA
Cutting, punching	—	—
Drilling	✓	✓
Sawing (supported by a panel)	✓	✓
Milling	—	—
Laser cutting	✓	✓
Hot bending	—	—
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	✓*	

\* own printing test required, samples are gladly provided.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	—	—
Special sizes	On request	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	



**SG VINTAGE Copper AR+**

2600 x 1000 | **NA** 17198 | **SA** 17200



**SG VINTAGE Silver AR+**

2600 x 1000 | **NA** 17197 | **SA** 17199



□ SG VINTAGE Copper AR+

2600 x 1000



**S-GLASS COLLECTION**

scratch-resistant

**SG VINTAGE AR+**

**PRODUCT CHARACTERISTICS**

	NA	SA
Surface material = Base material	PMMA AR+	
Back side material	PU-leather	
Material thickness mm	2,8	3,0
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■■■■	
Rolled packable	—	—
Smallest bending radius mm	1000	
Weight/panel kg	~ 7,8	~ 8,2

**PROCESSING**

	NA	SA
Cutting, punching	—	—
Drilling	✓	✓
Sawing (supported by a panel)	✓	✓
Milling	—	—
Laser cutting	✓	✓
Hot bending	—	—
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	✓*	

\* own printing test required, samples are gladly provided.

**EXTRA EQUIPMENT | ACCESSORIES**

	NA	SA
PVA pre-treatment	—	—
Special sizes	On request	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	



**SG LUXURY Bronze AR+**  
2600 x 1000 | **NA** 17820 | **SA** 17841




**SG LUXURY Gold AR+**  
2600 x 1000 | **NA** 17819 | **SA** 17840



□ SG LUXURY Bronze AR+

2600 x 1000

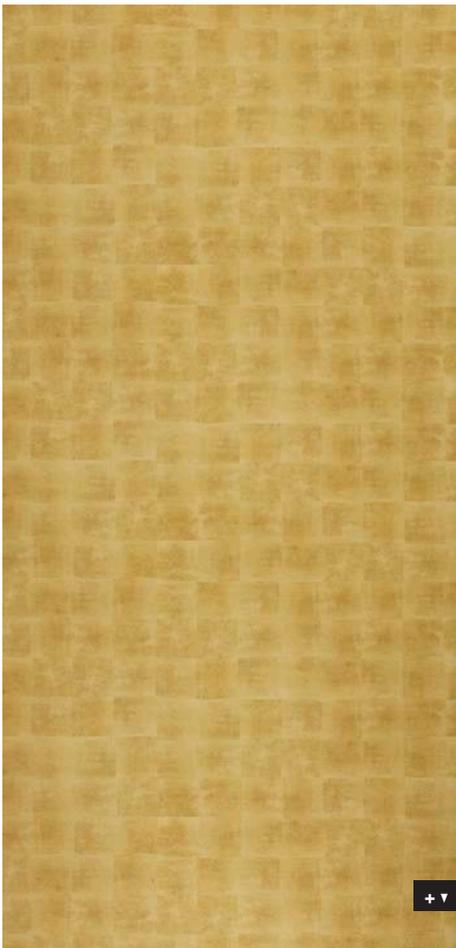

## S-GLASS COLLECTION

scratch-resistant

# SG LUXURY AR+

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material = Base material	PMMA AR+	
Back side material	PU-leather	
Material thickness mm	2,8	3,0
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■■■■	
Rolled packable	—	—
Smallest bending radius mm	1000	
Weight/panel kg	~ 7,8	~ 8,2

### PROCESSING

	NA	SA
Cutting, punching	—	—
Drilling	✓	✓
Sawing (supported by a panel)	✓	✓
Milling	—	—
Laser cutting	✓	✓
Hot bending	—	—
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	✓*	

\* own printing test required, samples are gladly provided.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	—	—
Special sizes	On request	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	



**SG OLD Platin AR+**

2600 x 1000 | **NA** 18067 | **SA** 18001



□ SG OLD Platin AR+

2600 x 1000



**S-GLASS COLLECTION**

scratch-resistant

**SG OLD Platin AR+**

**PRODUCT CHARACTERISTICS**

	NA	SA
Surface material = Base material	PMMA AR+	
Back side material	PU-leather	
Material thickness mm	2,8	3,0
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■■■■	
Rolled packable	—	—
Smallest bending radius mm	1000	
Weight/panel kg	~ 7,8	~ 8,2

**PROCESSING**

	NA	SA
Cutting, punching	—	—
Drilling	✓	✓
Sawing (supported by a panel)	✓	✓
Milling	—	—
Laser cutting	✓	✓
Hot bending	—	—
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	✓*	

\* own printing test required, samples are gladly provided.

**EXTRA EQUIPMENT | ACCESSORIES**

	NA	SA
PVA pre-treatment	—	—
Special sizes	On request	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	






**SG METALLIC USED Steel AR+**  
2600 x 1000 | NA 28422 | SA 28424



**SG METALLIC USED Sand AR+**  
2600 x 1000 | NA 28423 | SA 28425

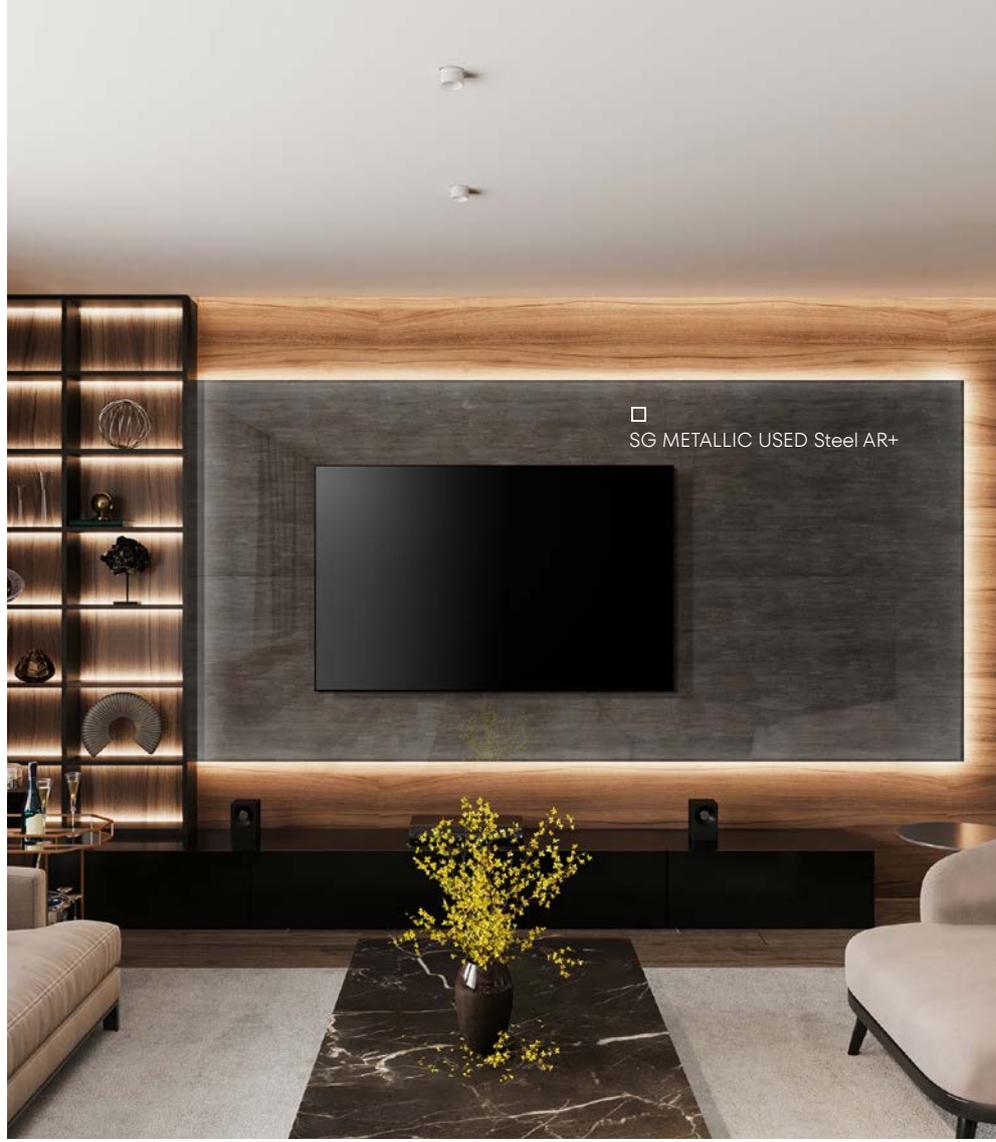

□ SG METALLIC USED Steel AR+

2600 x 1000



## S-GLASS COLLECTION

scratch-resistant

# SG METALLIC USED AR+

### PRODUCT CHARACTERISTICS

	NA	SA
Surface material = Base material	PMMA AR+	
Back side material	PU-leather	
Material thickness mm	2,8	3,0
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■■■■	
Rolled packable	—	—
Smallest bending radius mm	1000	
Weight/panel kg	~ 7,8	~ 8,2

### PROCESSING

	NA	SA
Cutting, punching	—	—
Drilling	✓	✓
Sawing (supported by a panel)	✓	✓
Milling	—	—
Laser cutting	✓	✓
Hot bending	—	—
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	✓*	

\* own printing test required, samples are gladly provided.

### EXTRA EQUIPMENT | ACCESSORIES

	NA	SA
PVA pre-treatment	—	—
Special sizes	On request	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	



**SG CLASSY Gold AR+**

2600 x 1000 | NA 28417 | SA 28419



2600 x 1000



**S-GLASS COLLECTION**

scratch-resistant

**SG CLASSY Gold AR+**

**PRODUCT CHARACTERISTICS**

	NA	SA
Surface material = Base material	PMMA AR+	
Back side material	PU-leather	
Material thickness mm	2,8	3,0
Temperature resistance	until 50 °C	
Wet room suitability	■■■■□	
Abrasion resistance	■■■■■■■	
Rolled packable	—	—
Smallest bending radius mm	1000	
Weight/panel kg	~ 7,8	~ 8,2

**PROCESSING**

	NA	SA
Cutting, punching	—	—
Drilling	✓	✓
Sawing (supported by a panel)	✓	✓
Milling	—	—
Laser cutting	✓	✓
Hot bending	—	—
PVA pressing	✓	—
Digital printing	✓*	
Screen printing	✓*	

\* own printing test required, samples are gladly provided.

**EXTRA EQUIPMENT | ACCESSORIES**

	NA	SA
PVA pre-treatment	—	—
Special sizes	On request	
Further thicknesses	—	

	NA	SA
Magnetic from 3 sheets	✓	
Cuttings	✓	
Flammability ASTM E84	—	
Flammability EN13501-1	—	



**SG Hollywood**

2600 x 1000 | NA 23116

On the protective film of the reverse side is a label "Reverse side / Processing side". SG Hollywood always has to be processed from the reverse side.

□  
SG Hollywood



Photo: © Form Factory

**S-GLASS COLLECTION****SG Hollywood****PRODUCT CHARACTERISTICS**

	NA
Surface material = Base material	PMMA
Back side material	PET
Material thickness mm	3,1
Temperature resistance	until 50 °C
Wet room suitability	■■■■□
Abrasion resistance	■■■□□□
Rolled packable	—
Smallest bending radius mm	1000
Weight/panel kg	~ 9,3

**PROCESSING**

	NA
Cutting, punching	—
Drilling	✓
Sawing (supported by a panel)	✓
Milling (supported by a panel)	✓
Laser cutting	✓
Hot bending	✓
Thermoforming	On request
Digital printing	✓*
Screen printing	✓*


\* own printing test required, samples are gladly provided.

**EXTRA EQUIPMENT | ACCESSORIES**

	NA
Special sizes (for absorbent substrate)	On request
Further thicknesses	—

	NA
Cuttings	✓
Flammability ASTM E84	—
Flammability EN13501-1	—



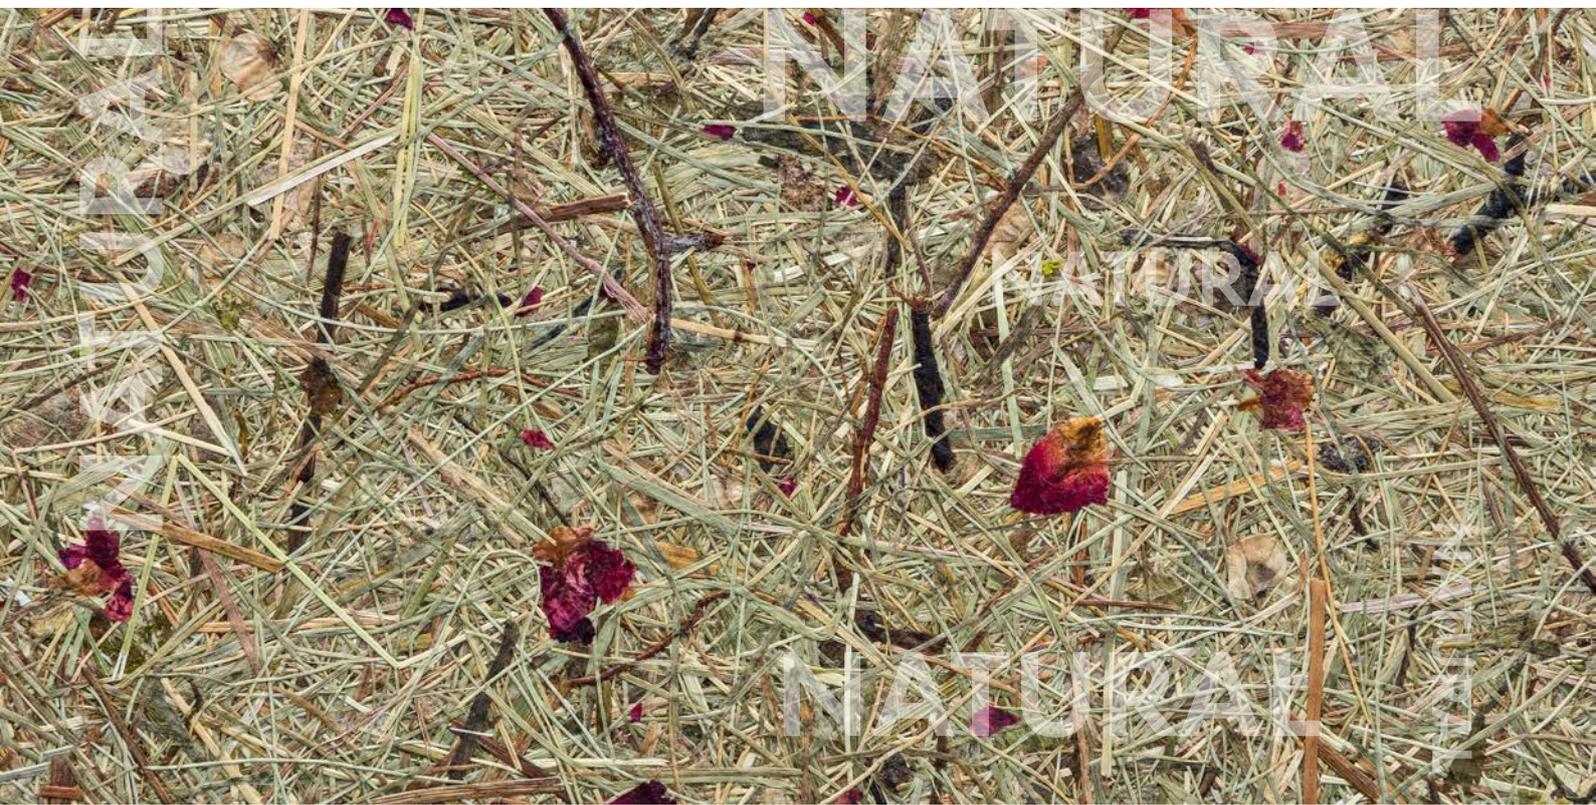

# NATURAL COLLECTION



Natural surfaces made of real, untreated alpine flowers and grasses combine the beauty and effect of natural materials with functional room design in a sustainable way. They retain their natural properties of scent, look and feel – Thus pleasantly catering to the senses and enriching any interior as well as providing benefits to your health.



**ALPINE PURE AL-11001**  
1360 x 3050



**ALPINE LAVENDER BLUE AL-11002**  
1360 x 3050



**ALPINE ROSE AL-11003**  
1360 x 3050



**ALPINE WHITE DAISY AL-11004**  
1360 x 3050



**ALPINE POTPOURRI AL-11005**  
1360 x 3050



## NATURAL COLLECTION

# ALPINE AL

### PRODUCT CHARACTERISTICS

	SA
Surface material*	100% eco-friendly, glued and pressed mix of alpine herbs and flowers
Base material	flax fleece
Material thickness mm	1,4
Temperature resistance	until 60 °C
Wet room suitability	■ ■ □ □ □ □
Rolled packable	✓

\* The product is delivered without a protective film.


### PROCESSING

	NA
Cutting, punching	✓
Drilling	✓
Sawing	✓



ALPINE PURE AL-11001



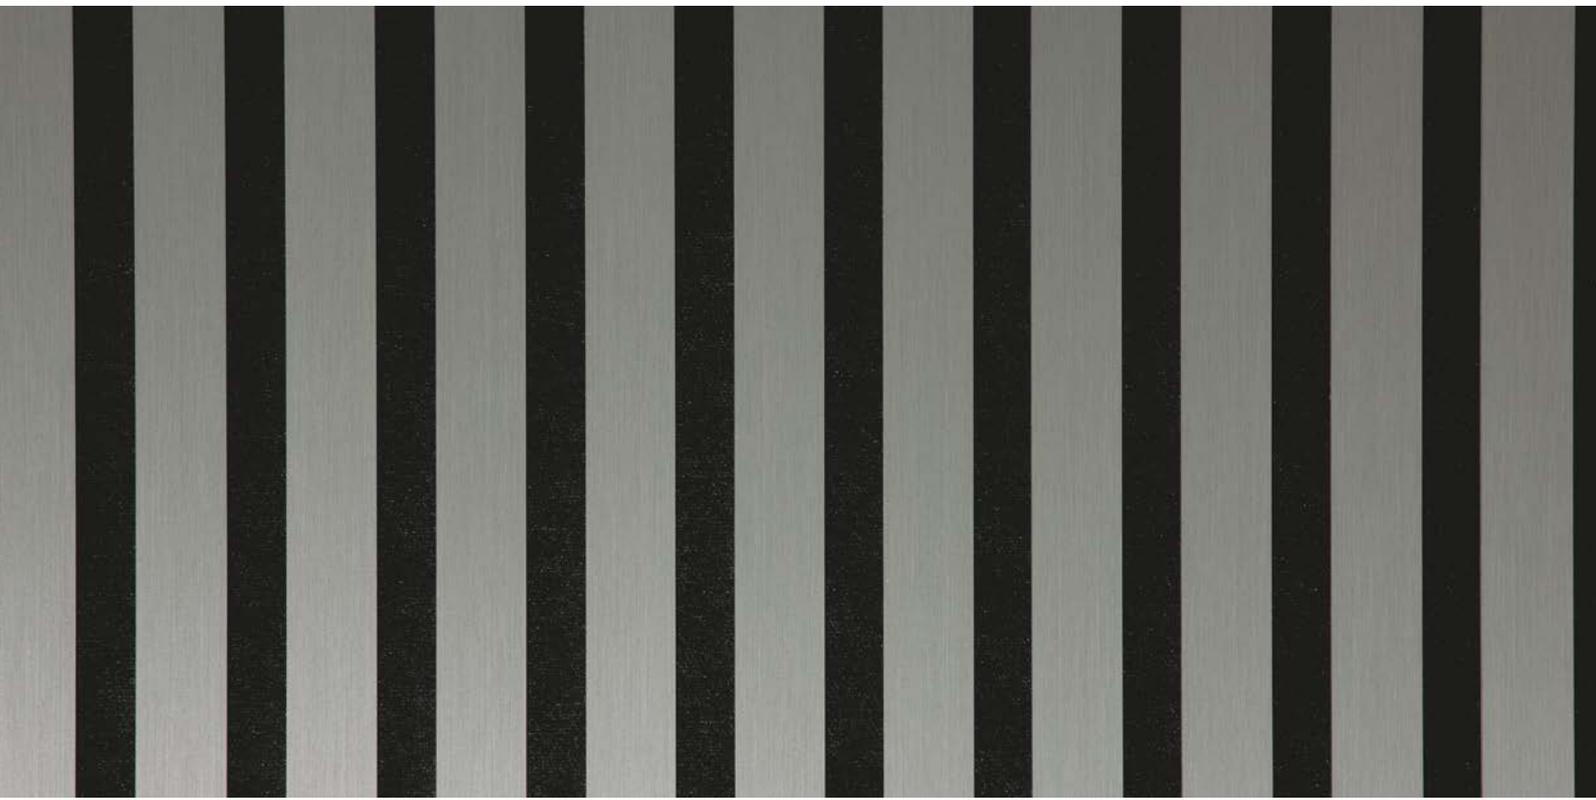

# ACOUSTIC WALL PANELS



Discover the ACOUSTIC WALL PANELS collection by WALLFACE—featuring stylish mirror, brushed, and exclusive design surfaces combined with effective acoustic performance. With 25% sound absorption\*, our panels not only impress visually but also significantly improve room acoustics.



NEW

**AP Chalk Light**

2800 x 600 | SA 30681



□ AP Chalk Light

ACOUSTIC WALL PANELS

**AP Chalk Light**

PRODUCT CHARACTERISTICS

	SA
Surface material	PVC
Base material	PES fibres
Material thickness mm	10,0
Temperature resistance	until 50 °C
Wet room suitability	■ □ □ □ □
Rolled packable	—
Weight/panel kg	~ 5,0

PROCESSING

	SA
Drilling	✓
Sawing	✓

ABSORPTION VALUE


	SA
Sound absorption coefficient	$\alpha_w = 0,25$ (H)*

\* Direct installation

EXTRA EQUIPMENT | ACCESSORIES

	SA
PVA pre-treatment	—
Special sizes	On request
Maximum length mm	2800
Maximum width mm	1200

	SA
Further thicknesses	—
Cuttings	✓
Flammability ASTM E84	—
Flammability EN13501-1	✓

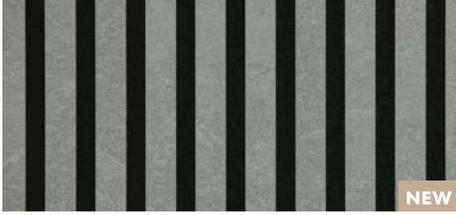

NEW

**AP Fuzzy Grey**

2800 x 600 | SA 31128



□ AP Fuzzy Grey

ACOUSTIC WALL PANELS

**AP Fuzzy Grey**

PRODUCT CHARACTERISTICS

	SA
Surface material	PP
Base material	PES fibres
Material thickness mm	10,0
Temperature resistance	until 50 °C
Wet room suitability	■ □ □ □ □
Rolled packable	—
Weight/panel kg	~ 5,0

PROCESSING

	SA
Drilling	✓
Sawing	✓

ABSORPTION VALUE

	SA
Sound absorption coefficient	$\alpha_w = 0,25$ (H)*

\* Direct installation

EXTRA EQUIPMENT | ACCESSORIES

	SA
PVA pre-treatment	—
Special sizes	On request
Maximum length mm	2800
Maximum width mm	1200

	SA
Further thicknesses	—
Cuttings	✓
Flammability ASTM E84	—
Flammability EN13501-1	✓




NEW

**AP LIMESTONE Grey**  
2800 x 600 | SA 30683



NEW

**AP MARBLE White**  
2800 x 600 | SA 31127

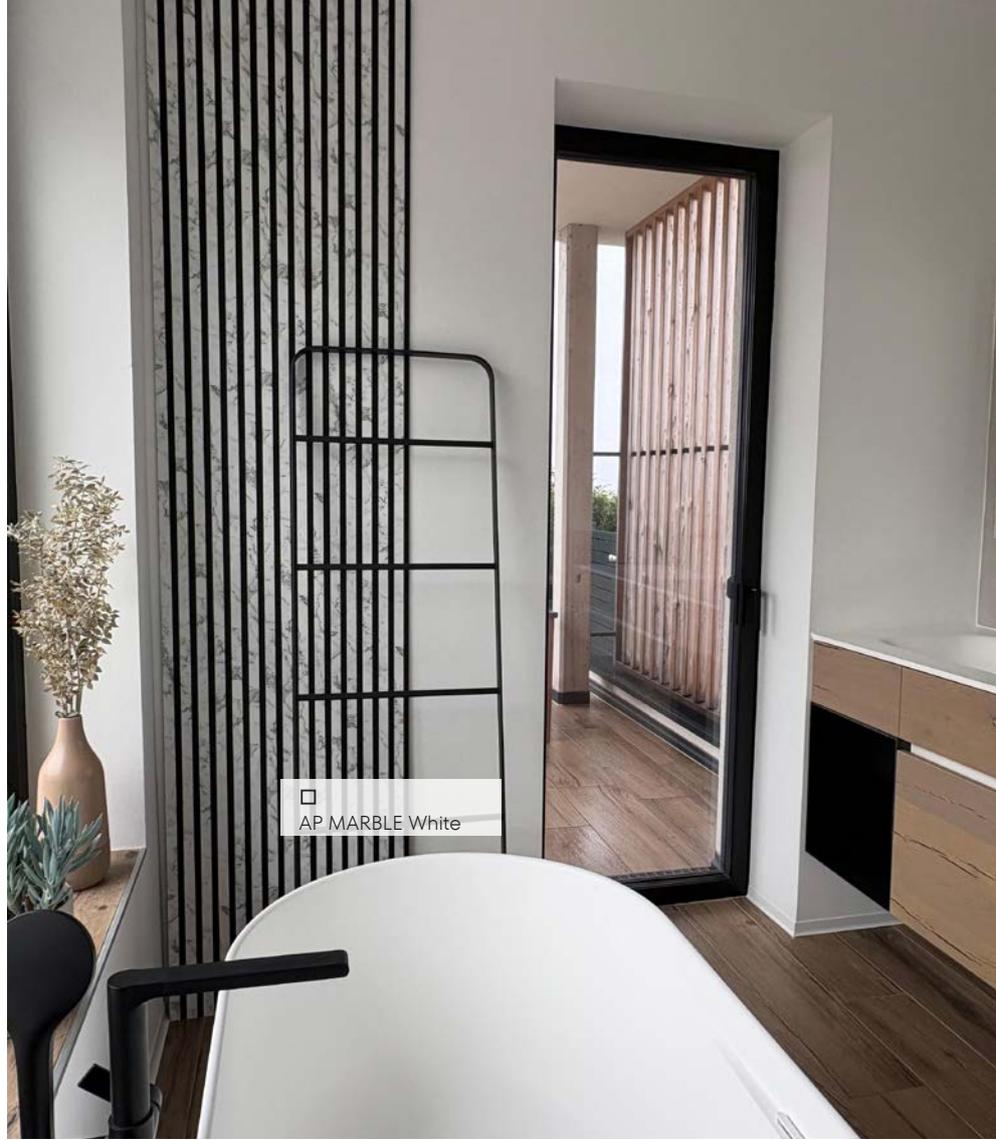

AP MARBLE White

## ACOUSTIC WALL PANELS AP DESIGN

### PRODUCT CHARACTERISTICS

	SA
Surface material	impregnated paper
Base material	PES fibres
Material thickness mm	10,0
Temperature resistance	until 50 °C
Wet room suitability	■□□□□
Rolled packable	—
Weight/panel kg	~ 5,0

### PROCESSING

	SA
Drilling	✓
Sawing	✓

### ABSORPTION VALUE

	SA
Sound absorption coefficient	$\alpha_w = 0,25$ (H)*

\* Direct installation

### EXTRA EQUIPMENT | ACCESSORIES

	SA
PVA pre-treatment	—
Special sizes	On request
Maximum length mm	2800
Maximum width mm	1200


	SA
Further thicknesses	—
Cuttings	✓
Flammability ASTM E84	—
Flammability EN13501-1	✓



NEW

**AP Copper brushed AR**


2800 x 600 | SA 30708

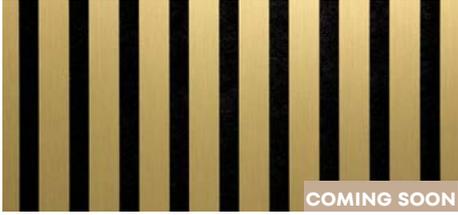

COMING SOON

**AP Brass brushed matt AR**


2800 x 600 | SA 31132

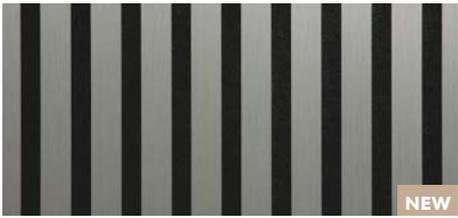

NEW

**AP Green Steel brushed AR**

2800 x 600 | SA 31133

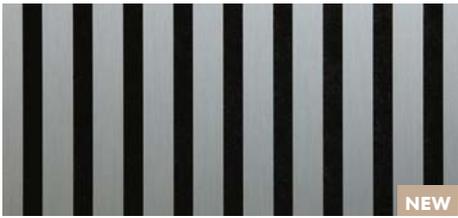

NEW

**AP Silver brushed**

2800 x 600 | SA 30709



□ AP Green Steel brushed AR

**ACOUSTIC WALL PANELS**

**AP BRUSHED**

**PRODUCT CHARACTERISTICS**

	SA
Surface material	PET
Base material	PES fibres
Material thickness mm	10,5
Temperature resistance	until 50 °C
Wet room suitability	■□□□□
Rolled packable	—
Weight/panel kg	~ 5,7

**PROCESSING**

	SA
Drilling	✓
Sawing	✓

**ABSORPTION VALUE**

	SA
Sound absorption coefficient	$\alpha_w = 0,25$ (H)*

\* Direct installation

**EXTRA EQUIPMENT | ACCESSORIES**

	SA
PVA pre-treatment	—
Special sizes	On request
Maximum length mm	2800
Maximum width mm	1200


	SA
Further thicknesses	—
Cuttings	✓
Flammability ASTM E84	—
Flammability EN13501-1	✓



NEW

**AP Anthracite AR**


2800 x 600 | SA 31129

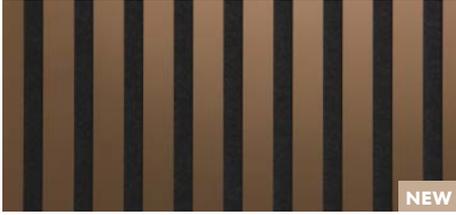

NEW

**AP Rosegold AR**


2800 x 600 | SA 31130

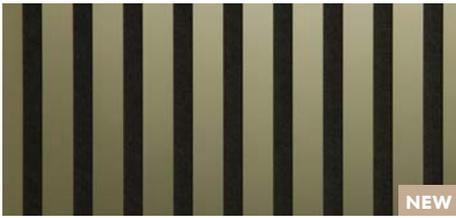

NEW

**AP Fashion Gold AR**


2800 x 600 | SA 31131

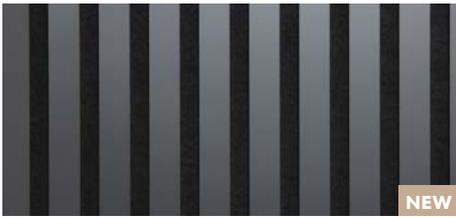

NEW

**AP Fashion Grey AR**

2800 x 600 | SA 30707

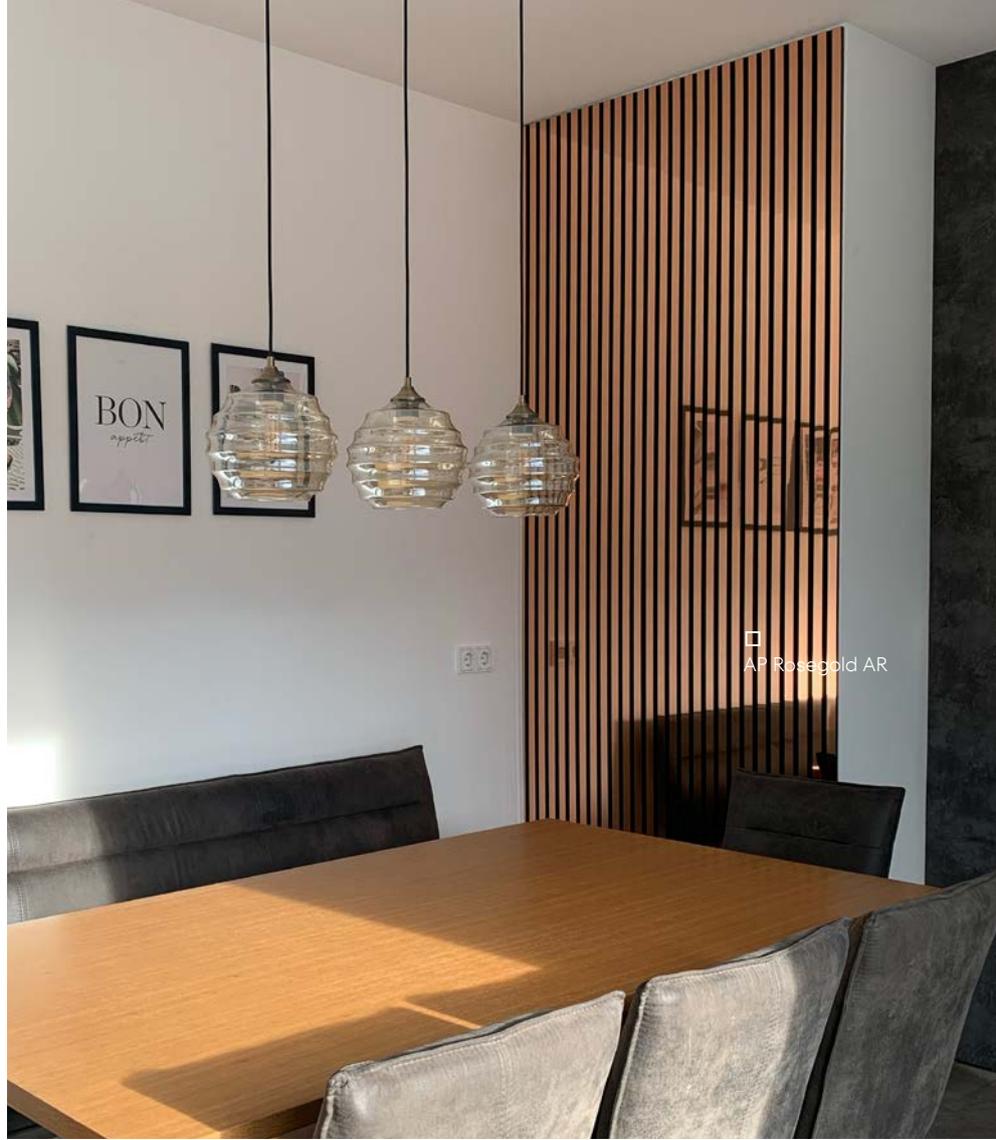

AP Rosegold AR

**ACOUSTIC WALL PANELS**

**AP MIRROR**

**PRODUCT CHARACTERISTICS**

	SA
Surface material	PET
Base material	PES fibres
Material thickness mm	10,5
Temperature resistance	until 50 °C
Wet room suitability	■□□□□
Rolled packable	—
Weight/panel kg	~ 5,7

**PROCESSING**

	SA
Drilling	✓
Sawing	✓

**ABSORPTION VALUE**

	SA
Sound absorption coefficient	$\alpha_w = 0,25$ (H)*

\* Direct installation

**EXTRA EQUIPMENT | ACCESSORIES**

	SA
PVA pre-treatment	—
Special sizes	On request
Maximum length mm	2800
Maximum width mm	1200

	SA
Further thicknesses	—
Cuttings	✓
Flammability ASTM E84	—
Flammability EN13501-1	✓



N°5  
CHANEL  
PARIS



# LEGEND

PRODUCT CHARACTERISTICS  
PROCESSING  
EXTRA EQUIPMENT & ACCESSORIES

# PRODUCT CHARACTERISTICS

To answer your questions as quickly as possible, our team has worked out a technical table with product characteristics, extra equipment and much more for each of our products:

## NA NON-ADHESIVE

Non-adhesive design panels can be bonded to absorbent substrates in two different ways, depending on the area of application. Bonding with white glue (PVA) and bonding with Cartridge adhesive and putty adhesive.

## SA SELF-ADHESIVE

SA - the back of the design sheet is equipped with an adhesive layer. For this we use high-quality acrylic adhesive substance.

Self-adhesive (SA) sheets are ideally suited to non-absorbent surfaces such as coated MDF/chipboard, glass, metal, plastic, etc.

Exception: NATURE Collection see page 103.

Whenever possible, self adhesive WALLFACE® products should be processed within 12 months.

Self-adhesive (SA) sheets are unsuitable for use on ceilings. Alternative processing options are available on request.

## SURFACE MATERIAL

In a changeable world we focus on lastingness and high standards by our surfaces. We make a distinction between:

- **ABS = Acrylonitrile butadiene styrene**
- **Print**
- **Impregnated paper = paper with protective varnish**
- **PET = Polyethylene terephthalate (UV lacquer for the AR version)**
- **PET/fibre = Polyethylene terephthalate (synthetic fibre)**
- **PMMA = Polymethyl methacrylate**
- **PMMA AR+ = Polymethyl methacrylate with AR+ scratch resistant coating**
- **PP = polypropylene**
- **PU-leather = Polyurethane/synthetic leather surface**
- **PVC = Polyvinyl chloride**

All variations are optically outstanding and also fascinate by their unique haptics. They correspond to the highest demands and they are suited especially for the interior area.

## BASE MATERIAL

For most of our products we use as base material a specially developed, highly impact resistant polystyrene type (HIPS). HIPS distinguish particularly by robustness, high impact and a very low weight.

Scratch-resistant PMMA is employed for the S-GLASS product group.

A backing made of natural fibres is used in the sustainable product line NATURE Collection.

- **ABS = Acrylonitrile butadiene styrene**
- **HIPS = high impact polystyrene**
- **HIPS, PE foam = high impact polystyrene and Polyethylene foam**
- **HPVC = Hard polyvinylchlorid**
- **Natural fibre**
- **PMMA = Polymethylmethacrylate**
- **PP-glass fibre = Polypropylene with fibreglass**
- **PES fibres = Polyester fibres**
- **PS = Polystyrene**

### Reverse side of S-GLASS panels:

- **PU-leather = Polyurethane synthetic leather surface**
- **Paper = printed paper**

## MATERIAL THICKNESS

The given material thicknesses refer to the stock program in non adhesive (NA) and self adhesive (SA) version.

## MAXIMUM RELIEF HEIGHT

With the given data we define the highest position of the respective design in non-adhesive (NA) and adhesive (SA) version.

## TEMPERATURE STABILITY

Already during development stage our WALLFACE® sheets are tested in special thermo-containers stuck on ground as well as unstuck with high temperatures and high air humidity.

Only the very best qualities correspond to our strict directives. The given data of the temperature stability refer to the lasting application of the product stuck on different grounds and to the long-term using temperature also without adhesion.

## WET ROOM SUITABILITY

An exposure of WALLFACE® sheets to humid areas is given when a design sheet is subjected to short term humidity condition. This humidity condition can occur by reason of high air humidity or by direct sprinkling water.

- ■ ■ ■ ■ Wet room suitability
- ■ ■ ■ □ Good wet room suitability
- ■ ■ □ □ Limited suitability (remove splash water)
- ■ □ □ □ Low wet room suitability
- □ □ □ □ Unsuitable for wet rooms

## ABRASION RESISTANCE

Our technology team already tests the products during development process to be able to offer the matching product for each of your demands.

Surfaces with very good and excellent abrasion resistance have the abbreviation "AR" in the product name and scratch-resistant products can be recognized directly by the abbreviation "AR+".

- ■ ■ ■ ■ ■ ■ ■ Scratch resistant (AR+)
- ■ ■ ■ ■ ■ ■ Excellent abrasion resistance (AR)
- ■ ■ ■ ■ □ Very good abrasion resistance (AR)
- ■ ■ ■ □ □ Good abrasion resistance
- ■ ■ □ □ □ Normal abrasion resistance
- ■ □ □ □ □ Low abrasion resistance
- □ □ □ □ □ Use only in the decoration area

## ROLLED PACKABLE

Basically our design sheets are packed flat on pallets. However, in order to dispatch small consignments as favourably as possible, we have developed a packaging carton in which many of our design sheets can be packed rolled as well.

Number of panels and whether the decor side is rolled inside or outside can be found in the technical table of the respective product.

## SMALLEST BENDING RADIUS

The given data refer to the smallest bending radius for concave or convex fixing. For all design sheets – with the exception of M-Style – all sheet edges must be fixed mechanically. For M-Style there is no need for mechanical fixing!

## WEIGHT PER PANEL

The panel weight is given in kg and can be found in the technical table of the respective product.

## TOLERANCES

Machine-related dimensional and angle tolerances:  
+/- 2.0 mm in relation to 1,000 mm

Temperature-related dimensional deviations:  
+/- 0.7 mm in relation to 1,000 mm at a temperature change of 10 °C


## SURFACE PROTECTION

A protective film (Polyethylene/PE) protects our surfaces against damages. This protective film should be removed only after the application of our design sheets.

Design panels that are delivered without a protective film are listed in the technical table of the respective product.

## SOUND ABSORPTION COEFFICIENT OF ACOUSTIC WALL PANELS

Determination of the sound absorption coefficient according to EN ISO 354:2003 and calculation of the weighted sound absorption coefficient  $\alpha_w$  in accordance with EN ISO 11654:1997. Panels mounted directly onto the substrate – without spacing.

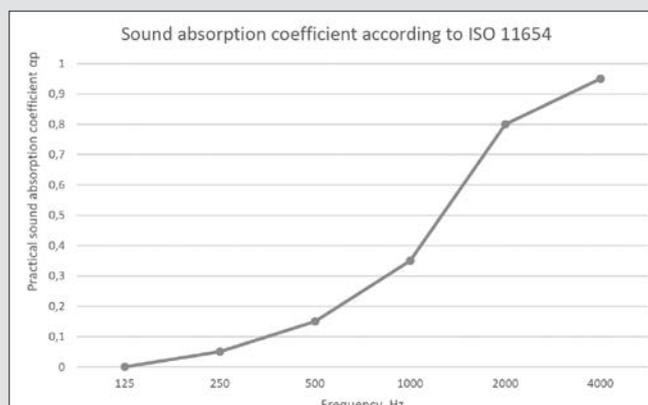

# PROCESSING

All mechanical processing must always be carried out from the decorative surface. Please consider the respective technical table of the selected product to ensure that the processing step is permissible for this product.

## CUTTING

A majority of our decorative panels are easy to cut with a wallpaper knife. Simply scarve the surface (decor side) and break over the edge. For self-adhesive products (SA), the adhesive or foil must be cut through after breaking over the edge on the reverse side. Please always use good-cutting knives.

For machine cutting, we recommend to use paper or veneer cutting machines.

## PUNCHING

Band steel cutting is recommended for design sheets in thickness from 1 up to 1.5 mm.

## DRILLING

All WALLFACE® sheets can be drilled from the decor side.

All drillings must be carried out on a stable underlay (even MDF Board).

Drill recommendation: Wood drills, Forstner drills and hard metal drills – each with a center punch with two pre-cutters.

Core drills for wood can also be employed, but in this case it is essential that in the area next to the drilling the patterned sheet is attached firmly to a stable underlay.

## SAWING

### WALLFACE® guideline values:

Material thicknesses of up to 1 mm:  
HW 280x3.2 / 2.2x30 Z60 / 12.46-18.08 WZ

Thicker than 1 mm:

HW 250x3.2 / 2.2x30 Z40 / 19.63 WZ/FA

HW 250x3.2 / 2.2x30 Z40 / 19.63 FZ/TR

(speed 6000 rpm, progressive feed of up to 25 m/min).

### For LEATHER Collection and FABRIC Collection:

HW 255x2.8 / 2.0x30 Z80 / 10.01 FZ WZ

(speed 6000 rpm, progressive feed of up to 10 m/min).

The best result is achieved with MDF underlay (4 mm) above and below, slow progressive feed and high speed.

\*HW (hard metal material), WZ/FA (alternating teeth/bevelled edge), FZ (flat teeth), TR (trapezoidal teeth)

### ACOUSTIC WALL PANELS:

The panels can be cut to size as required using a fine-toothed saw.

### For S-GLASS:

Sheets can be cut with jig, hand-held circular, panel and circular table saws. During cutting on the reverse side, the underlay should also be sawn through. Then deburr all cut edges.

Select the speed and feed that are adapted to the saw blade. Use sharp cutting tools!

The generation of heat should be constantly avoided, as this can result in material tension.

Cutting to length using a hand-held or plunge cut circular saw  
Cut from the reverse side and use a stable underlay. Recommended saw blade: 160x2.2 hard metal blade with 48 alternating teeth.

### Cutting to length using a jigsaw

Set the pendulum action to zero, or at a maximum to 1 and then saw from the reverse side. The patterned sheet must lie fully on the jigsaw cutting table in order to ensure that no vibrations are created - otherwise, there is a risk of crack formation in the PMMA

Recommended saw blade: employ saw blades with a tooth pitch of 1.2 to max. 2.5 mm. (coarse metal saw blade / fine wood saw blade / preferably PMMA saw blades).

## MILLING

### For material up to 2 mm thickness:

Cutter with 3 mm diameter, rotation speed from 12000 up to 24000 rpm, progressive feed up to 12 m/min.

### Decor side on top:

milling cutter with a left-hand twist, cutting right.

### Decor side below:

milling cutter with a right-hand twist, cutting right.

For material with a thickness of more than 2 mm, reduce the progressive feed and use a milling cutter with a larger diameter (6 mm).

## LASER CUTTING

WALLFACE® sheets can be processed with standard lasers. The cutting speed depends on the wattage of the laser.

**Note:** Place the decorative panel on the laser machine so that its reverse side is on the machine's vacuuming side. As with all standard PMMA products, it is recommended to "temper" the material after laser cutting. The high temperature of the laser causes tension in the material, which could cause tension cracks. Tempering equalises these tensions.

## HOT BENDING

Heat up the WALLFACE® sheets from the backside – for both, internal and exterior angles.

### Approximate parameters for material in 1 mm thickness:

Wire temperature: approx. 200°C, heating time: approx. 6-20 seconds -depending on the surface material and bending tool

- hot bending is outwardly (decor outside = external angle) possible
- hot bending inwards (decor inside = interior angle) possible

### Additional information

- LEATHER Collection: wrinkles along the internal angle may appear when hot bending is done inwardly
- SG Hollywood: Only an inner corner on the visible side is possible. Guideline values: Duration approx. 110 seconds at approx. 200 °C degrees (depending on the bending tool)
- SL OCEAN, SL DIAMOND, SL PILLAR, SL FACET: Only an outer corner is possible. Approximate parameters for material in 2 mm thickness: Wire temperature: approx. 200°C, heating time: approx. 30-40 seconds

## THERMOFORMING

With a variety of Deco-Line products light forming, by using flat and not sharp-edged tools, is possible (avoid sharp contours and use larger radii).

With every new moulding test are to be made, in order to obtain ideal results. The tool must be adapted to the material.

## PVA-PRESSING

In order to obtain a compact design board with a decorative panel with material thicknesses of 1-4 mm, the design sheet can be pressed.

Due to the rigid adhesive connection between the decorative panel and the wooden beams, the finished board does not extend anymore and can therefore either be processed seamlessly on walls, or furniture fronts can be made. Detailed instructions for PVA-pressing can be found on page 120.

### Conditionally pressable with PVA/PU adhesives - SL OCEAN, SL DIAMOND, SL FACET, SL PILLAR, SL TARGET:

Due to their textured surfaces, these design panels can not be bonded over their entire surface. Excessive pressing pressure may cause deformation or damage to the structured panel.

A customer-trial with reduced pressing pressure is required. Original samples for testing purposes are available on request.

### Further processing of design panels that are only conditionally pressable with PVA/PU adhesives

As the panels are not fully bonded, slight structural changes may occur during further processing (e.g. sawing, milling, etc.).

Please use appropriate tools and work with particular care.

## PRINTING

Owing to the many differing printing and colour systems, customers must carry out a printing test. The result will depend on the respective motif. We will be pleased to provide original samples for testing.

We classify with the statements "yes", "no" or "on request".

**yes:** Our print tests were positive, which means that not only the print looks good, but it also passes an abrasion and test test

**no:** Our print tests were negative, which means that either the print did not convince visually, or various tests were not passed.

**on request:** our print tests were positive with additional treatments, or not all tests were passed to full satisfaction. In this case, please contact us so that we can advise you.

The final adhesion performance will set in very slowly and can take up to one week on air-drying (20 °C.).

# ACCESSORIES & SPECIAL EQUIPMENT

## ADHESIVE RECOMMENDATION

### **Solvent-free assembly adhesive without plasticizers Cartridge adhesive for strand bonding:**

K1-Hybrid adhesive: Bostik H551 Supergrip Multi, Ramsauer 640

### **Solvent-free assembly adhesive without plasticizers Putty adhesive:**

Glutolin UK, Bostik Ardaflex® Multi (tooth spatula A2, B3)

Area of application: MS polymer hybrid adhesive is ideal for bonding the WALLFACE® product group S-GLASS on absorbent and non-absorbent substrates.

Detailed information on processing with Cartridge adhesive and putty adhesive on page 155.

**Carry out adhesion tests and self-tests before bonding the panels!**

## PVA PRE-TREATMENT

In order to be suitable for PVA bonding, depending upon the material on the reverse side, WALLFACE® sheets either have to be pre-treated by means of an additional production process, or roughened by using a vibration sander (80-grain sandpaper).

Being able to carry out this pre-treatment for you in our factory, we absolutely need this information together with your order.

You can find detailed information on page 156.

## SPECIAL FORMATS

In addition to the standard sizes given in the OVERVIEW we offer with pleasure individually adapted product dimensions.

## FURTHER THICKNESSES

In addition to the standard formats specified in the OVERVIEW, we are happy to offer customized product sizes.

## MAGNETIC

All WALLFACE® sheets are available with a magnetic back from 3 pieces onwards. Exception - all LL ROMBO, S-Glass Hollywood, SL OCEAN, SL DIAMOND, SL PILLAR, SL FACET.

WALLFACE® magnetic foils are suitable on different metallic grounds and on magnetic colours. The exchange of design sheets thereby becomes a child's play! The application fields for the WALLFACE® magnetic program are nearly unlimited – for shop-window decoration, shop fitting and fair design or in the furniture area, decoration field and for all kinds of displays.

Self-adhesive WALLFACE® metal film is employed when a suitable metallic ground is lacking. The metal film can be ordered as a sheet (2,600x1,000 mm) or roll (14 or 29 m)

## CUTTINGS

You want to get customized sheets or cuttings? Please contact us that we can offer the best possible solution to you. With a cutting length of up to 3.2 meters, a sawing length of up to 3 meters, and a punching length of up to 2.3 meters, we are able to promptly meet your requirements

## FIRE CLASSIFICATION

The products from the stock program are normally flammable and correspond to the fire safety regulations according to DIN 4102 B2 or UL Standard 94 measured value: 94 HB as well as EN 13501-1 classification (E).

Marked products **Flammability (FR)** are available in flame retardant version on request, on a different carrier material. Manufacturer's certificate of compliance of the following standards are available: EN 13501-1 and ASTM E 84. Info sheets on demand!



# PROCESSING INSTRUCTION

BASIC RULES OF PROCESSING

SUBSTRATE PREPARATION FOR BONDING

BONDING OF SELF-ADHESIVE  
DESIGN PANELS (SA)

PROCESSING OF NON-ADHESIVE  
DESIGN PANELS (NA) WITH PUTTY ADHESIVE

BONDING WITH CARTRIDGE ADHESIVE

PRESS DECORATIVE PANELS WITH WHITE  
GLUE (PVA GLUE)


SELF-ADHESIVE DESIGN PANELS BONDED  
ONTO COATED WOOD BASED SHEETS  
INCLUDING EDGES AND MILLING

PROCESSING INFORMATION  
NATURE-LINE


# BASIC RULES OF PROCESSING

For worry-free processing and an optimal end result, you only have to take a few very important things into account! Below you will find the basic rules, as well as information on individual processing options and processing tips.


Please note that our product groups are sometimes structured differently and that some of them can also be processed differently. **Therefore, please always find out on the respective product page whether a specific processing is possible.**

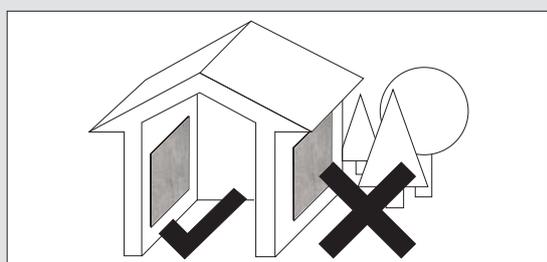


The decorative panels are only suitable for indoor use.

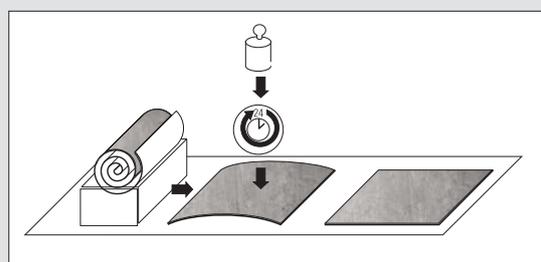

Design panels that are delivered rolled should be laid flat for at least 24 hours. Additional weighting improves flatness.

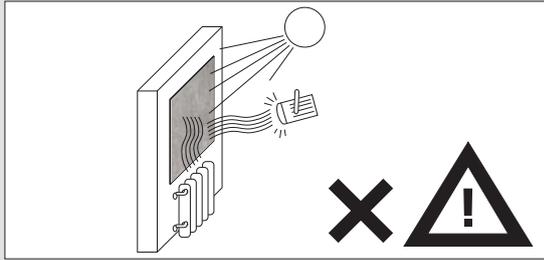


Not recommended for use near an open fire or sources of intense heat.

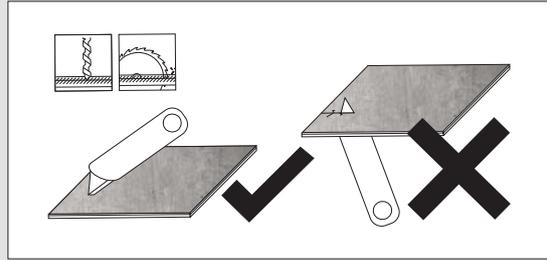

Mechanical processing such as cutting, sawing, punching or drilling of the design panels is always carried out on the top side of the decor and not on the back.

It is imperative that sheet flapping be avoided totally during all working phases.


Always lay the sheets out flat and if necessary pin them down.

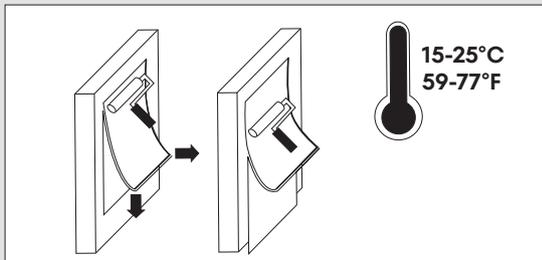

Ideal processing temperature 15°C to 25°C.

The decorative panels must be acclimatised, i.e. brought to room temperature before processing.


This serves to avoid the formation of condensate on the adhesive surface and to reduce the expansion of the panel due to reduced temperature differences.

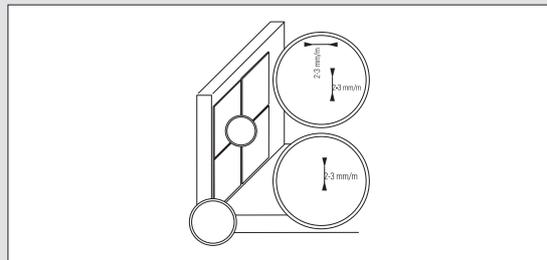

The majority of our products are made of thermoplastics, which expand by around 0.7 mm – measured over a length of 1 m – when the temperature rises by 10 °C. For this reason, an expansion joint of approx. 2 – 3 mm must be allowed for at the board edges.

If the ambient temperature is high or the temperature fluctuates sharply, the expansion joint should be enlarged or the panel format selected smaller.

Tips for avoiding expansion joints: Either press the decorative panels or use the product group NATURE Collection.

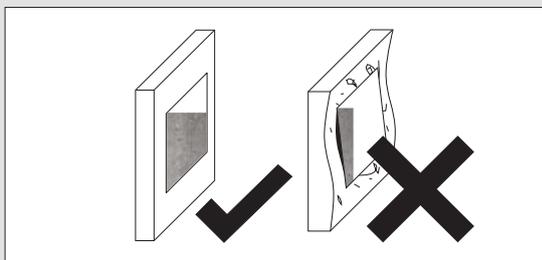

The substrate must be free of loose parts, dry, smooth, and free of dust, dirt, grease, wax and silicone. Depending on whether the substrate is absorbent or non-absorbent, various bonding options are used.

In the case of convex and concave substrates, mechanical fastening in the edge area is absolutely necessary.



The right processing depending on the substrate:

**absorbent substrate:**

- (e.g. raw MDF, plasterboard,...)
- Bonding with cartridge adhesive and putty adhesive see page 155
- Pressing decorative panels see page 156

**non-absorbent substrate:**

- (e.g. coated plate, glass, ect.)
- self-adhesive decorative panels see page 154

# PROCESSING INFORMATION

## SUBSTRATE PREPARATION FOR BONDING

The substrate must be free of loose parts, dry, smooth, and free of dust, dirt, grease, wax and silicone. Never mount WALLFACE® panels on uneven surfaces, as this results in a loss of visual quality.

In the case of convex and concave substrates, mechanical mounting in the edge area is absolutely necessary (except for M-STYLE)!

### **Detect underground:**

Simply drop a waterdrop onto the surface - if it doesn't soak in and stays there, it's a non-absorbent surface.

### **Non-absorbent substrate:**

To achieve maximum adhesion, always clean non-absorbent surfaces with alcohol (ethanol, isopropyl alcohol).

Self-adhesive panels (SA) are best suited for non-absorbent surfaces such as coated MDF/chipboard, glass, metal, plastic, etc.

### **Absorbent substrate:**

For absorbent substrates such as raw chipboard, MDF, plasterboard or smoothed brickwork, a solvent-free adhesive must be used, which is suitable for both the substrate and the polystyrene material (carrier material). See adhesive recommendations on page 149.

## BONDING OF SELF-ADHESIVE DESIGN PANELS (SA)

Our self-adhesive design panels, marked with the abbreviation „SA“, have a strong adhesive layer on the back of the decorative panel - made of high-quality acrylates or synthetic rubber - and can therefore be attached quickly and easily to non-absorbent surfaces.

The self-adhesive design panels are glued directly to the substrate, taking into account an expansion joint - without additional adhesive.

With self-adhesive products from the NATURE Collection, the expansion joint can be omitted.

With self-adhesive design sheets (SA) - pull off the adhesive cover step by step, do not touch the adhesive surface and press as firmly as possible onto the subsurface. Absolutely avoid the formation of bubbles (air pockets).

For large areas, it is best to use a medium-hard rubber hand roller with a width of approx. 170 mm. The final adhesion is reached after 24 hours at room temperature.

Self-adhesive design panels (SA) are not suitable for ceiling applications. Alternative processing options are available upon request.

## PROCESSING OF NON-ADHESIVE DESIGN PANELS (NA) WITH PUTTY ADHESIVE

The putty adhesive (solvent-free assembly adhesive without plasticizers) Glutolin UK and Bostik Ardaflex® Multi are perfect if you want to glue a non-adhesive design panel (NA) directly to an absorbent substrate. This is simply applied to the substrate with a spatula and the design panels are glued, taking into account an expansion joint.

No expansion joint required for the product groups NATURE Collection, ANTIGRAV, and LUXEWALL PANEL COLLECTION.

**Area of application:** Putty adhesive Glutolin UK and Bostik Ardaflex® Multi (tooth spatula A2 or B3) are ideal for bonding WALLFACE® products to absorbent, even surfaces such as wood, MDF, plywood, chipboard, plasterboard or smoothed masonry.

The processing guidelines for the respective adhesive must be observed.

## BONDING WITH CARTRIDGE ADHESIVE

**Suitable for the product group S-GLASS**


### Strand bonding:

On the reverse side of the sheet: vertical positioning of a bead at a distance of 10 mm from the edge of the sheet or the profile leg, then position a mirrored adhesive tape at a distance of 10 mm.

It is recommended that the protective strip on the mirrored tape be removed prior to the further processing phases.

Apply vertical beads of adhesive to the reverse side of the sheet at intervals of approx. 10 mm to the mirrored adhesive tape. (Depending on the underlying surface, the beads should have a height of at least 4 mm.) Apply the other beads at a distance of 60 mm.

/// Adhesive bead ■ Mirror tape

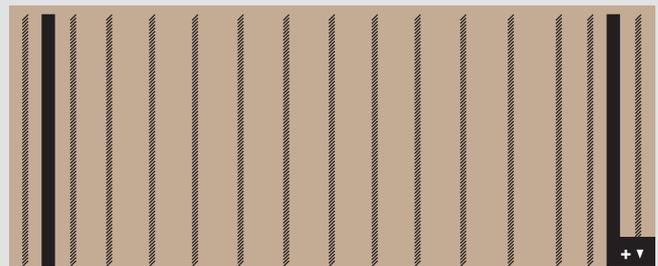

The illustration does not show the entire length of the panel

Bring the sheet into position without any drying time and then press it down onto the prepared surface by means of vertical strokes with a soft wallpaper roller.

The gluing can also be done without mirror adhesive tape!

Advantage: The sheet can be positioned much easier.

Disadvantage: The sheet has to be temporarily attached until the adhesive beads have cured in order to prevent the plate from slipping unintentionally.

## POINTING WITH SILICONE

**Suitable for the product group S-GLASS**

Once the adhesive has hardened, the joints can be sealed with silicone.

Immediately remove the protective film from the sheet and any possible adhesive residues.

# PRESS DECORATIVE PANELS WITH WHITE GLUE (PVA GLUE)

## DESCRIPTION – STRUCTURE

### S-GLASS decorative sheet

PVA white glue


### Wood based sheet

minimum thickness of 16 mm!

Use thicker wood based sheets for larger formats!

PVA white glue

### Balancing sheet

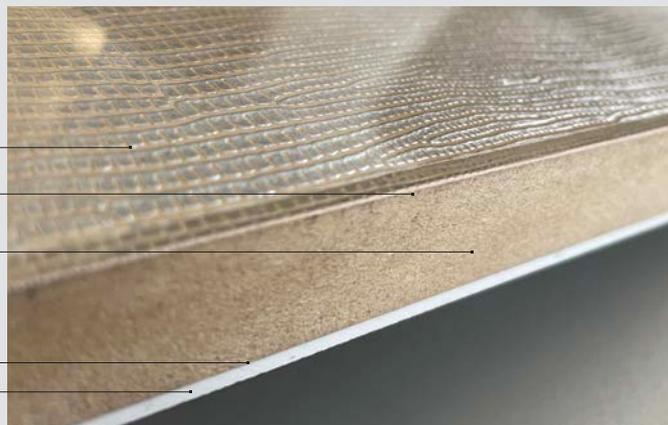

Please refer to the technical spreadsheet of the product to see if pressing is possible.

## PRE-TREATMENT OF THE NON-ADHESIVE DESIGN PLATE

If the design requires a pretreatment, please take a look at the technical spreadsheet of the product. However, the general rule is that products from the S-GLASS product group do not require any pretreatment.

### Order pre-treatment from WALLFACE®

Since the production process is not done automatically, the PVA pretreatment must be advised with the order.

The pretreatment carried out by WALLFACE® is an industrial treatment with electrons to increase the surface tension.

Since the effect of the treatment decreases again over time, the design panel pretreated by WALLFACE® must be pressed within 2 months after the delivery date.

### Carry out pre-treatment yourself

The back of the decorative panel can be roughened using an orbital sander or random orbital sander.

We recommend sandpaper with a 80 grains.

## APPROPRIATE BALANCING SHEET

So that the finished pressed panel remains flat and distortion free, it is necessary to choose a suitable balancing sheet that matches the decorative panel according to its material characteristics and thickness.

On request, we can offer technically coordinated white grained balancing sheets.

The following items are suitable for the product groups listed:

### **25880 PMMA Balance Sheet White NA PVA**

2800x1250x2  
S-GLASS

### **25879 PMMA Balance Sheet White NA PVA**

2600x1010x2  
S-GLASS

### **25878 HIPS Balance Sheet White NA PVA**

2800x1250x0,8  
DECO Collection, STRUCTURE Collection, FABRIC Collection,  
LEATHER Collection

### **25877 HIPS Balance Sheet White NA PVA**

2615x1015x0,8  
DECO Collection, STRUCTURE Collection, FABRIC Collection,  
LEATHER Collection

### **25889 HIPS Balance Sheet Black NA PVA**

2800x1250x0,8  
DECO Collection, STRUCTURE Collection, FABRIC Collection,  
LEATHER Collection

### **31703 HIPS Balance Sheet Black NA PVA**

2615x1015x0,8  
DECO Collection, STRUCTURE Collection, FABRIC Collection,  
LEATHER Collection

If the Balance Sheet has not been pressed within 2 months, we recommend a check on the surface tension of the reverse side and if required, its subsequent surface treatment (sandpaper).

## APPLY WHITE GLUE

- Lay the acclimatized WALLFACE® decorative panel, balancing sheet and wooden based panel next to each other on a straight, clean and sufficiently large working table.
- The wooden based panel is cut approx. 10 mm bigger than the design sheet/balancing sheet.
- First of all put the PVA glue on the back of the design and balancing sheet using a glue roller – as evenly and over the entire surface as much as possible!
- Then both WALLFACE® sheets are put in the middle of the wooden support panel as soon as possible. No direct application of glue on the wooden carrier board – this can have a negative effect on the flatness.
- If the design sheet does not have a wrinkle-free protection foil due to transport or storage conditions, it must be removed before the pressing process.
- Afterwards the composite goes into the plate press.

S-GLASS with synthetic fibre backing: The consumption of PVA white glue is slightly higher due to the absorbent synthetic fibre backing. The glue consumption is approx. 200 – 300 g/m<sup>2</sup>. The synthetic fibre should have a wet adhesive sheen shortly before gluing.

## PRESSING IN THE PLATE PRESS

### Do not press with too much pressure, use your own experience and know-how!

If the guidelines for the pressing time of the used white glue differ, the basic rule is: add 1 minute of pressing time per mm of material thickness or additional enclosure such as foam rubber.

#### STRUCTURE, FABRIC, LEATHER

**Guideline:** The press force should be around 2 kg/cm<sup>2</sup> (0.2 N/mm<sup>2</sup>), the temperature around 45°C and the pressing time approx. 15 minutes.

During the pressing process a medium-hard foam rubber mat with a thickness of approx. 5 mm must be put between the pressing sheet and the decorative side of the sheet.

It achieves an even pressure distribution and at the same time it avoids unwanted pressure marks caused by dirt particles between the press plate and the design panel.

#### DECO

**Guideline:** The press force should be around 2 kg/cm<sup>2</sup> (0.2 N/mm<sup>2</sup>), the temperature around 45°C and the pressing time approx. 15 minutes.

Flat design panels are better being pressed without a foam rubber. The foam rubber could make the surface seem too uneven. In order to easier get a smooth surface, ask us for decorative sheets in 2mm thickness.

ATTENTION: When pressing mirror or high-gloss products, an absolutely undamaged, clean pressing plate is required.

#### S-GLASS

**Guideline:** The press force should be around 2 kg/cm<sup>2</sup> (0.2 N/mm<sup>2</sup>), the temperature around 30°C and the pressing time approx. 30 minutes.

- As soon as the sheets are removed from the press, they must be stored flat in stack pressure.
- A really even base is important for the flatness of the bonded panel!
- Cover the stack with 19 mm chipboard so that the top board can also be laid out flat.
- Let the panels cool down in the stack after the pressing process – preferably overnight (for at least 12 hours).

A second option for small quantities is to press the panels in the machine overnight at around 20°C. This type of processing does not require stack pressure afterwards.

## PROCESSING OF THE PRESSED DESIGN PANEL

Glued and pressed panels can be processed simply with most of the standard woodworking machines and woodworking tools.

During the process, the PE protective film must remain on the surface. The use of suitable and well-cutting tools prevents damage. Ideal machine parameters, tool design and cutting speeds have to be observed individually with a sample production before the manufacture.

The finished pressed design panels can be easily cut to size with a saw and then be provided with commercial edges made of plastic, aluminium or wood.

# SELF-ADHESIVE DESIGN PANELS BONDED ONTO COATED WOOD BASED SHEETS

including edges and milling

Suitable for the product group S-GLASS

## MATERIAL REQUIREMENTS

WALLFACE® decorative sheet:  
SA dimension: 2600 x 1000 mm, self-adhesive

### Wood based sheet:

Wood based sheet coated on both sides, dimensions:  
2600 x 1000 mm

### Counter-pressure:

Not required


### Edge material:

All standard furniture edging

## PROCESSING STEPS

1. Clean the coated wood sheet.
2. Remove the protective film on the adhesive side of the design sheet.
3. Bond the design sheet onto the wood based sheet using a rubber roller.
4. Immediately cut the bonded sheets into the desired final dimensions (saw).
5. Place the edgings on the edge gluing machine.
6. **Using an electrical manual router, cut a rounded or chamfered edge exactly up to the point of transition from the transparent PMMA layer/PS layer to the structured layer. Please see sketch!** In combination, the edge material and the transparent PMMA layer/PS layer give the resultant radius or chamfer. The thicker the edge material, the wider the facet.

## "FACET MILLING IS THE PREREQUISITE FOR AN EDGED END PRODUCT!"

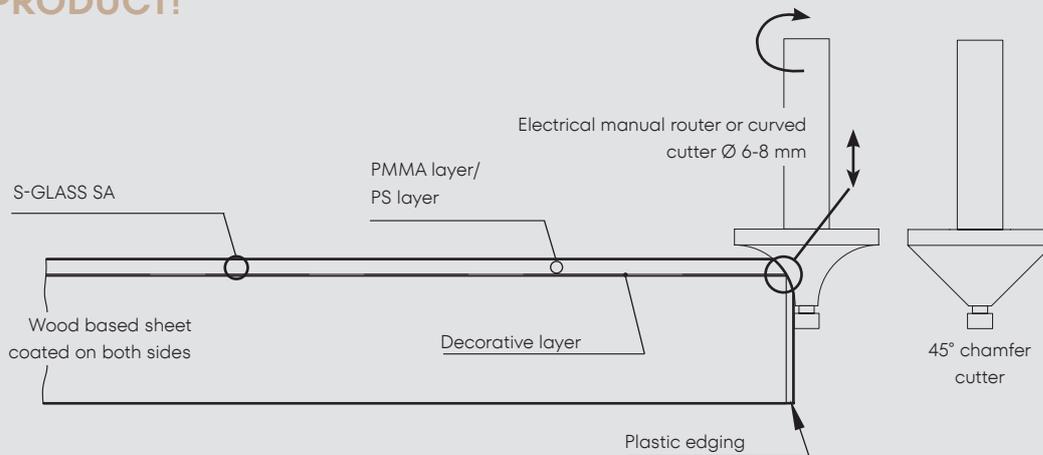

## PROCESSING NATURE COLLECTION

### Underground:

Bonding of the self-adhesive NATURE Collection product panels without expansion joints on all substrates.

The substrate must be dry, smooth, free of loose parts, dust, dirt, grease, wax and silicone.

### Mechanical processing:

must always be done from the decor surface. The products can be easily cut with a wallpaper knife on site.

### Bonding:

- Remove the adhesive cover step by step, avoiding contact with the adhesive surface and press as firmly as possible onto the subsurface. (Absolutely avoid the formation of bubbles / air pockets)
- For large areas, it is best to use a medium-hard rubber hand roller with a width of approx. 170 mm.
- The final adhesion is reached after 24 hours at room temperature.



Easy format customization



Processing without expansion joints



Thin and dimensionally stable

## PROCESSING ACOUSTIC WALL PANELS

### Underground:

ACOUSTIC WALL PANELS can be bonded to all substrates without expansion joints.

The substrate must be free of loose particles, dry, smooth and free of dust, dirt, grease, wax and silicone.

### Processing:

The acoustic panel can be mounted on the wall or ceiling as desired. It can be installed using screws or mounting adhesive/

putty adhesive and does not require any prior technical knowledge. The panels can be cut to size from the backside using a fine-toothed saw.

For an improved sound insulation, install an additional wooden substructure between the acoustic panels and the wall and fill it with mineral wool.



Apply assembly adhesive.



Mount the panels on the wall and adjust them.



Press or roll the panel firmly into place.  
Tip: For secure fixing, use 2 to 4 screws.



When installing without adhesive, 8 to 10 screws are recommended.



Done!

## STORAGE

WALLFACE® sheets must always be kept in indoor stock, no storage outside!

### The following must be taken into account:

- Design sheets to be stored flat, rolled packed design sheets should be unpacked and laid out flat and - if necessary - subjected to additional weight to improve flatness (Use carton underlay and weigh down the entire sheet in order to prevent damage.)
- Store the uppermost plate in the pile with decor side down.
- Protect WALLFACE® products from UV rays.
- Do not expose WALLFACE® products to moisture or humidity.
- Protect material from dirt, dust and mechanical damages.
- A permanent storage of more than 3 months at a temperature less than 0°C or more than 30°C may impact the quality of our design sheets and should be avoided.

### S-GLASS:

Wrap the sheets in foil, enclose and seal the silicate bag. This prevents possible rippling in the edge area of the panels due to the effects of air humidity.

## TRANSPORT

In general, for the transport of WALLFACE® products pay attention to protect them from dirt, UV radiation, moisture and mechanical damages.

- Use stable, flat pallets with carton bedding, the pallet should be longer than the design sheets.
- Place the uppermost design sheet on the pallet with the decor side face down. This uppermost design sheet should be protected in addition by a carton and a board (e.g., chipboard, HDF...).
- The design sheets should be protected from shifting.
- The edges and sides must be also protected (edge protection, PE foil ...)
- Avoid temperatures below -35°C or more than 50°C.
- Structured sheets to be transported on pallets with the patterns running in same direction.
- WALLFACE® products must be acclimatized prior to processing; ideal processing temperature is approx. 10°C to 25°C.
- Before any processing of the design sheets read the attached processing instructions which you can also find on the WALLFACE® website!
- Rolled packable - Information in the technical Table for the respective product

## CLEANING

### Do not use abrasive cleaners, solvent cleaners or pure alcohol!

**DECO, STRUCTURE, NATURE, M-STYLE, S-GLASS:** in case of light dirt by means of soft cleaning cloth (it should be free of dust and free of dirt). In case of heavy dirt by means of standard plastic or window cleaner (spray cleaners not onto the material surface, but sparingly onto the cleaning cloth).

**LEATHER:** Clean leather surfaces by means of standard liquid soap and then remove the soap with a humid cloth.

**FABRIC:** Stains caused by oil, greases and ink must be removed immediately. Vacuum the surface in case of low pollution; in case of heavy pollution, dab the stain with an absorbent cloth, then wipe it off with mild soapy water.

## DISPOSAL

The keeping of healthy environment has high priority for us! We check all raw materials used for their environmental compatibility. Because not everyone has its own plastic disposal container, we pay special attention in development of new products to use only high-quality materials: materials, which may be disposed safely with the domestic waste. On

demand we are pleased to provide LGA certificates for all WALLFACE® sheets.

**NATURE:** The design panels can be disposed and recycled via waste paper and therefore environmentally friendly beyond their life cycle.

---

This information tool was provided according to the best knowledge and with special care. The information is based on practical experiences, test results as well as on in-house testing and corresponds to our today's state of knowledge. Detailed info sheets are available on request. No liability is accepted for misprints, norm errors and mistakes!

---

